GlobTek, Inc. www.globtek.com Drawing Title: NEMA 5-15P (TYPE B) 2 CONDUCTOR + GROUND PLUG to IEC320-C15;, GT Cable #104: 14 / 3 Conductors, 9.3mm OD, SJT, 105 Deg.C, 300V, BLK/WHT		'GRN, Approvals: UL/CUL, 2920mm,	
186 Veterans Drive, Model No. Power Cord			
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 3011049F5597(R)	Rev A1	
Fax (201) 784-0111			

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification

ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at https://www.globtek.com/iso-certificates/

Prop 65 Statement:https://en.globtek.com/prop-65-statement.pdf

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (https://en.globtek.com/terms-and-conditions/).

The purchaser of this product (Customer) agrees that it is their sole responsibility to determine suitability/fitness of the product described in this specification for their application and to take precautions for protection against any hazards attendant to the handling and use of the product.

Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.

Contents of this document are subject to change without prior notice.

Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.

A delay in receipt of this form will delay delivery schedule.

Company Name:	Customer P/N:
Quote Number:	Date:
Authorized Representative Name:	Authorized Representative Signature:

GlobTek, Inc. www.globtek.com	GlohTek Black		
•	Model No. Power Cord		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 3011049F5597(R)	Rev A1	
Fax (201) 784-0111			

REVISION HISTORY

REV	/	DESCRIPTION	SUB	DATE	APPROVED
	A1	update to new format	DR	01/24/2022	QA
	Α	INITIAL RELEASE, RFS. 21330, SO	DR	08/01/2011	QA


Cordset Information:

CordsetColor:GlobTek Black


Cord Length (mm):2920

NOTES:

CIOD I CIX, IIIO.	Drawing Title: NEMA 5-15P (TYPE B) 2 CONDUCTOR + GROUND PLUG to IEC320-C15;, GT Cable #104: 14 / 3 Conductors, 9.3mm OD, SJT, 105 Deg.C, 300V, BLK/WHT/GRN, Approvals: UL/CUL, 2920mm, GlobTek Black		
186 Veterans Drive, Model No. Power Cord			
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 3011049F5597(R)	Rev A1	
Fax (201) 784-0111			

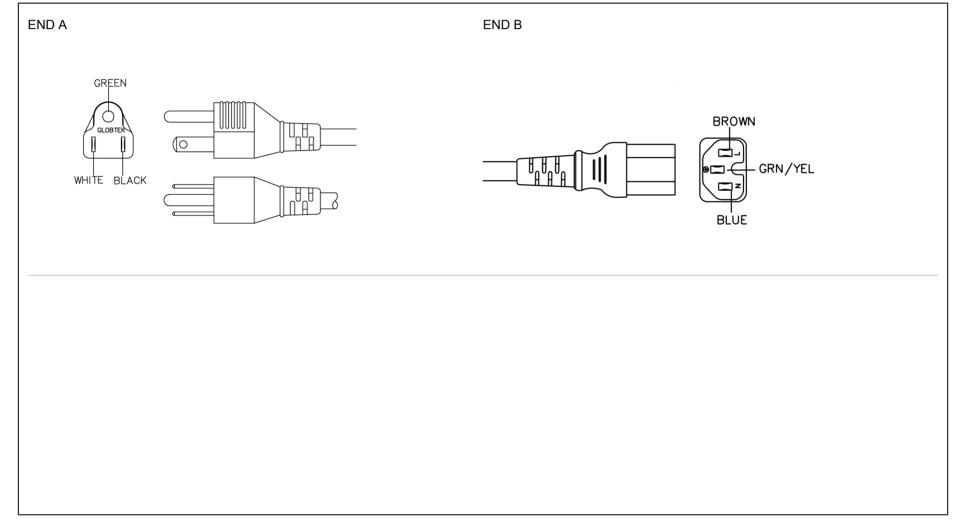

GlobTek, Inc. www.globtek.com	GlohTek Black		
•	Model No. Power Cord		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 3011049F5597(R)	Rev A1	
Fax (201) 784-0111			

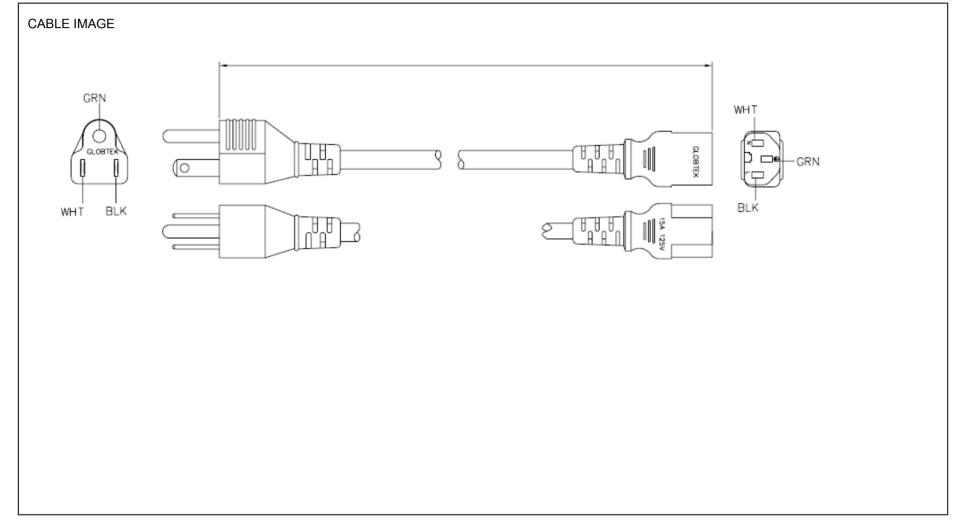

GIOD I CIK, II IC.	Drawing Title: NEMA 5-15P (TYPE B) 2 CONDUCTOR + GROUND PLUG to IEC320-C15;, GT Cable #104: 14 / 3 Conductors, 9.3mm OD, SJT, 105 Deg.C, 300V, BLK/WHT/GRN GlobTek Black	, Approvals: UL/CUL, 2920mm,	
186 Veterans Drive, Model No. Power Cord			
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 3011049F5597(R)	Rev A1	
Fax (201) 784-0111			

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST, ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT https://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

End A	Cable	End B
Code:302	Code:104	Code:701H
Description:NEMA 5-15P (TYPE B) 2 CONDUCTOR +	Description:GT Cable #104: 14 / 3 Conductors, 9.3mm OD,	Description:IEC320-C15;
GROUND PLUG	SJT, 105 Deg.C, 300V, BLK/WHT/GRN, Approvals: UL/CUL	Rating (V):250
Rating (V):125	Color:GlobTek Black	Rating (A):10.0
Rating (A):15.0	Wire Gauge(AWG):14	Gender:Male
Gender:Male	Cond:3	Overmolded:Yes
Overmolded:Yes	Type:SJT	
	Temperature:105° C	
	Amps:15	
	Volts:300	
	OD:9.3	
	ConductorsColors:BLK/WHT/GRN	

Plug Approvals		Cable Approvals		Connector Approva	als
CULUS	UL/CUL	CULUS	UL/CUL		European approvals
UL 817		UL 817			
LINK TO CERT		LINK TO CERT			
AGENCY ONLINE DOCUMENTS	http://er	n.globtek.com/cordsets/			
RoHS/RoHS3 Declaration	https://v	vww.globtek.com/pdf/rohs_cert/01	t30000002p7FaAAI		
REACH Declaration	https://v	vww.globtek.com/pdf/iso_certifica	tes/REACH.pdf		
Conflict Minerals Declaration	https://v	vww.globtek.com/pdf/conflict-mine	erals.pdf		
Prop 65 Statement	https://e	en.globtek.com/prop-65-statement	t.pdf		
CE.UKCA.Cord	https://g	globtek.secure.force.com/spec/ec_	_decl_product_model_family	_incl_cord?id=01t30000002p	7Fa

PROPRIETARY INFORMATION

CIOD I CIN, II IO.	Drawing Title: NEMA 5-15P (TYPE B) 2 CONDUCTOR + GROUND PLUG to IEC320-C15;, GT Cable #104: 14 / 3 Conductors, 9.3mm OD, SJT, 105 Deg.C, 300V, BLK/WHT/GRN, Approvals: UL/CUL, 2920mm, GlobTek Black		
	Model No. Power Cord		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 3011049F5597(R)	Rev A1	
Fax (201) 784-0111			

IPXY rating is based on 3rd party testing and customers should check suitability and test system level IPXY rating before ordering.		

CIOD I CIN, II IO.	Drawing Title: NEMA 5-15P (TYPE B) 2 CONDUCTOR + GROUND PLUG to IEC320-C15;, GT Cable #104: 14 / 3 Conductors, 9.3mm OD, SJT, 105 Deg.C, 300V, BLK/WHT/GRN, Approvals: UL/CUL, 2920mm, GlobTek Black		
	Model No. Power Cord		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 3011049F5597(R)	Rev A1	
Fax (201) 784-0111			

Hanking:Bulk, BUNDLE 25
Description:Bulk Packed in bundles of 25
Image:
N/A
Notes/Modifications/Customizations (notes in this section supersede the values shown in the standard spec):
· ·