

Features

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction


General Description

- Case: molded plastic
- Polarity: Color band denotes cathode
- Package: SOD-323 Plastic Package

Marking

Type number	Marking code
B110WS	R10

Package outline

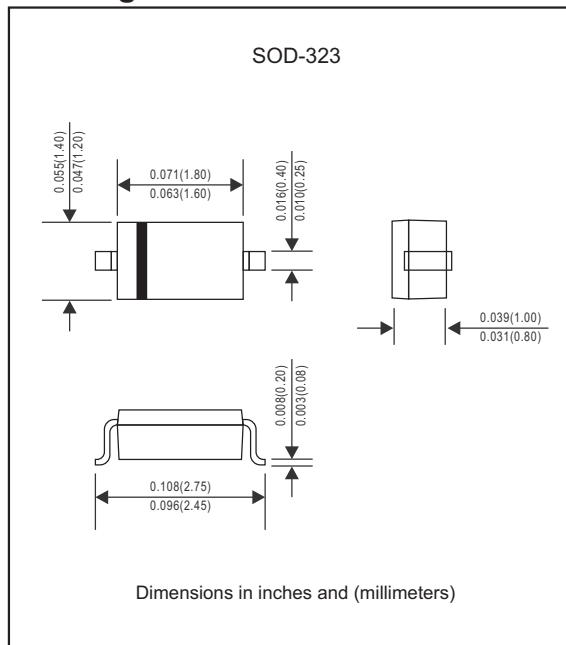

Maximum Ratings @T_A=25°C unless otherwise noted

Symbol	Parameter	Limit	Unit
VRRM	Maximum Recurrent Peak Reverse Voltage	100	V
VRMS	Maximum RMS Voltage	70	V
VDC	Maximum DC Blocking Voltage	100	V
IF	Continuous Forward Current	1	A
IFSM	Non-repetitive Peak Forward Surge Current@8.3mS	15	A
P _{tot}	Total Power Dissipation	250	mW
R _{ΘJA}	Thermal Resistance From Junction To Ambient	400	°C/W
T _J	Operation Junction Temperature Range	-40~+125	°C
TSTG	Storage Temperature Range	-55~+150	°C

Electrical Characteristics @T_A=25°C unless otherwise noted

Symbol	Parameter	Test conditions	Min	Typ	Max	Unit
V _F	Forward voltage	I _F =1A			0.85	V
I _R	Reverse voltage leakage current	V _R =100V			5.0	μA

Typical Performance Characteristics ($T_J = 25^\circ\text{C}$, unless otherwise noted)

