



Description:

This N-Channel MOSFET uses advanced trench technology and design to provide excellent $R_{DS(on)}$ with low gate charge. It can be used in a wide variety of applications.



Features:

- 1) $V_{DS}=30V, I_D=150A, R_{DS(on)} < 3.3m\Omega @ V_{GS}=10V$
- 2) Low gate charge.
- 3) Green device available.
- 4) Advanced high cell density trench technology for ultra low $R_{DS(on)}$.
- 5) Excellent package for good heat dissipation.



Absolute Maximum Ratings: ($T_C=25^\circ C$ unless otherwise noted)

Symbol	Parameter	Ratings	Units
V_{DS}	Drain-Source Voltage	30	V
V_{GS}	Gate-Source Voltage	± 20	V
I_D	Continuous Drain Current- $T_C=25^\circ C$	150	A
	Continuous Drain Current- $T_C=100^\circ C$	98	A
I_{DM}	Pulsed Drain Current ¹	600	A
P_D	Power Dissipation	108	W
E_{AS}	Single pulse avalanche energy ²	225	mJ
T_J, T_{STG}	Operating and Storage Junction Temperature Range	-55 to +150	$^\circ C$

Thermal Characteristics:

Symbol	Parameter	Max	Units
$R_{\theta JC}$	Thermal Resistance, Junction to Case	1.4	$^\circ C/W$

Electrical Characteristics: ($T_C=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
Off Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250 μA	30	---	---	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =30V, V _{GS} =0V	---	---	1	μA
I _{GSS}	Gate-Source Leakage Current	V _{GS} =±20V, V _{DS} =0A	---	---	±100	nA
On Characteristics						
V _{GS(th)}	GATE-Source Threshold Voltage	V _{GS} =V _{DS} , I _D =250 μA	1	1.6	2.5	V
R _{DS(on)}	Drain-Source On Resistance ³	V _{GS} =10V, I _D =30A	---	2.5	3.3	mΩ
		V _{GS} =4.5V, I _D =20A	---	4.5	6.5	mΩ
Dynamic Characteristics						
C _{iss}	Input Capacitance	V _{DS} =15V, V _{GS} =0V, f=1MHz	---	3499	---	pF
C _{oss}	Output Capacitance		---	499	---	
C _{rss}	Reverse Transfer Capacitance		---	430	---	
Switching Characteristics						
t _{d(on)}	Turn-On Delay Time	V _{DD} =15V, V _{GS} =0V R _{GEN} =3Ω, I _D =30A, V _{GS} =0V	---	25	---	ns
t _r	Rise Time		---	24	---	ns
t _{d(off)}	Turn-Off Delay Time		---	90	---	ns
t _f	Fall Time		---	38	---	ns
Q _g	Total Gate Charge	V _{GS} =10V, V _{DS} =15V, I _D =30A	---	37	---	nC
Q _{gs}	Gate-Source Charge		---	8	---	nC
Q _{gd}	Gate-Drain “Miller” Charge		---	12	---	nC
Drain-Source Diode Characteristics						
I _S	Continuous Source Current	VG=VD=0V	---	---	150	A

I_{SM}	Pulsed Drain Current	$V_G=V_D=0V$	---	---	600	A
V_{SD}	Diode Forward Voltage ²	$V_{GS}=0V, I_D=30A$	---	---	1.2	V
T_{rr}	Reverse Recovery Time	$I_F=20A, dI/dt=100A/\mu s,$	---	42	---	ns
Q_{rr}	Reverse Recovery Charge		---	39	---	nC

Notes:

1. Repetitive Rating: Pulse Width Limited by Maximum Junction Temperature
2. EAS condition: $T_J=25^{\circ}C$, $V_{DD}=15V$, $V_G=10V$, $R_G=25\Omega$, $L=0.5mH$, $I_{AS}=30A$
3. Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 0.5\%$

Typical Characteristics:

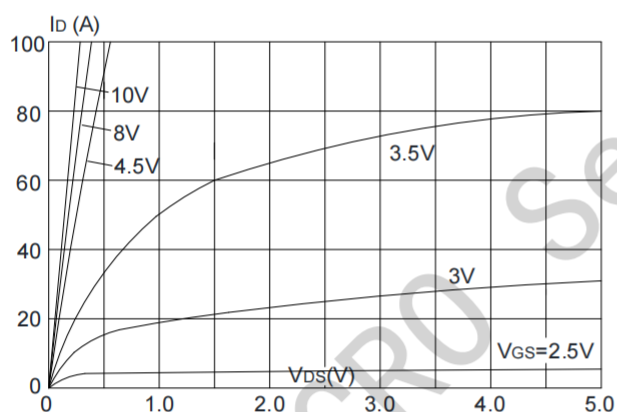


Figure 1: Output Characteristics

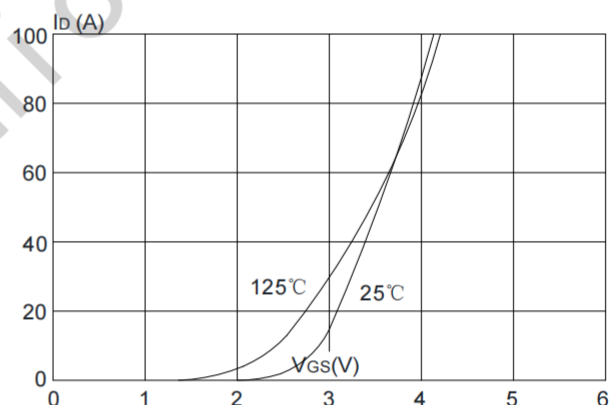


Figure 2: Typical Transfer Characteristics

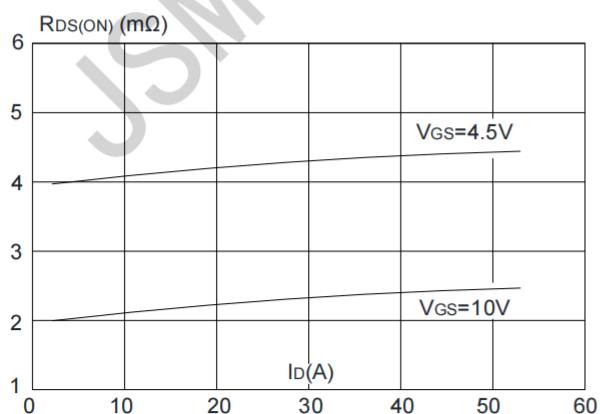


Figure 3: On-resistance vs. Drain Current

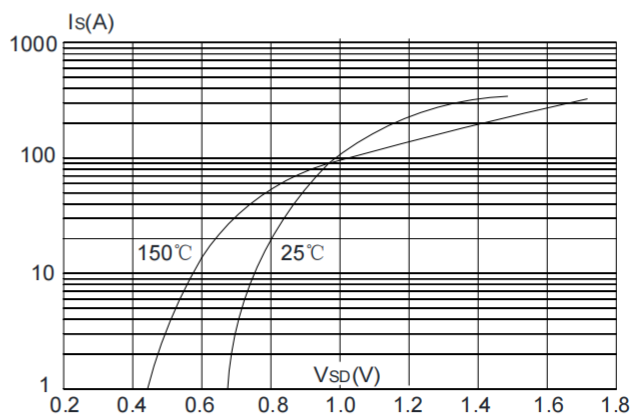


Figure 4: Body Diode Characteristics

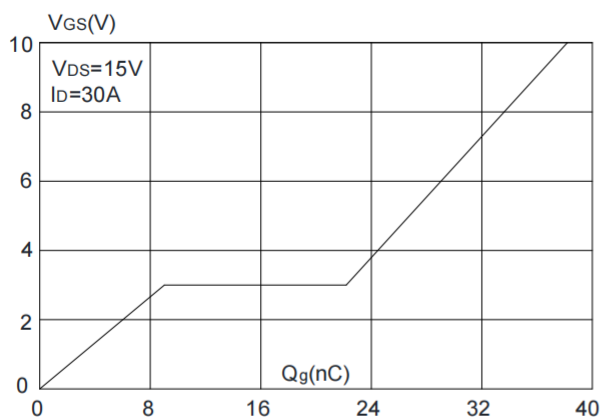


Figure 5: Gate Charge Characteristics

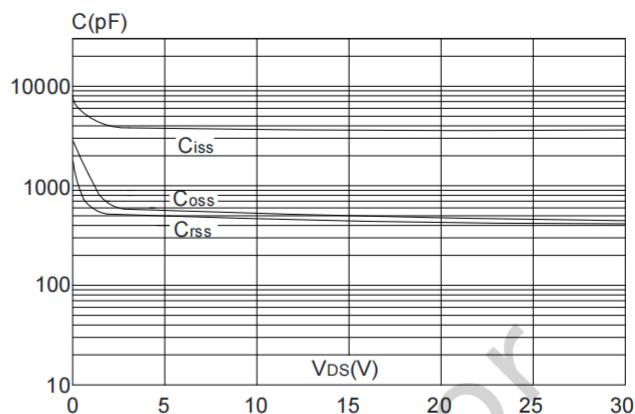


Figure 6: Capacitance Characteristics

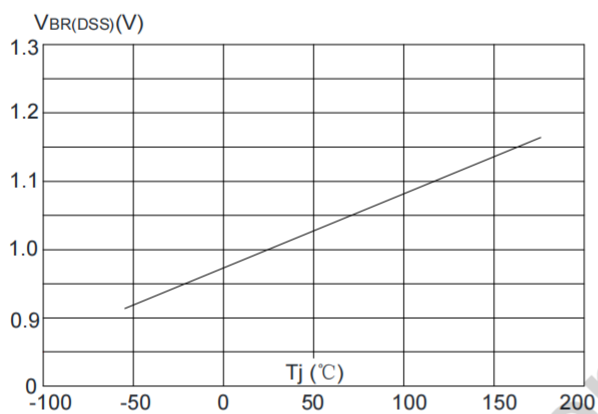


Figure 7: Normalized Breakdown Voltage vs. Junction Temperature

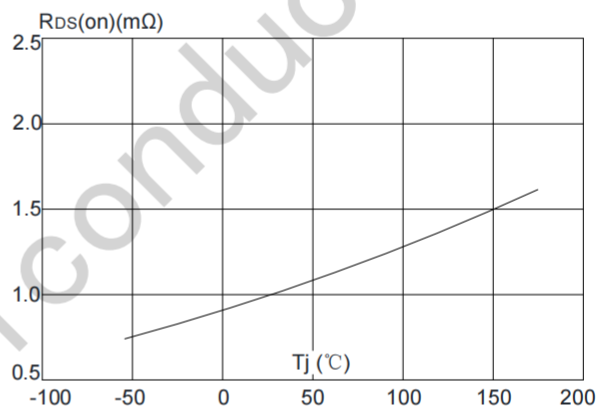


Figure 8: Normalized on Resistance vs. Junction Temperature

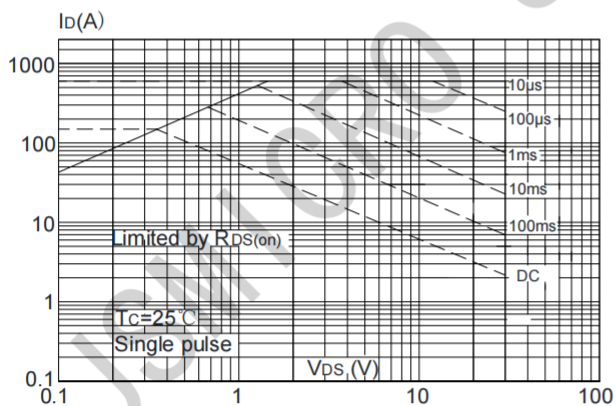


Figure 9: Maximum Safe Operating Area

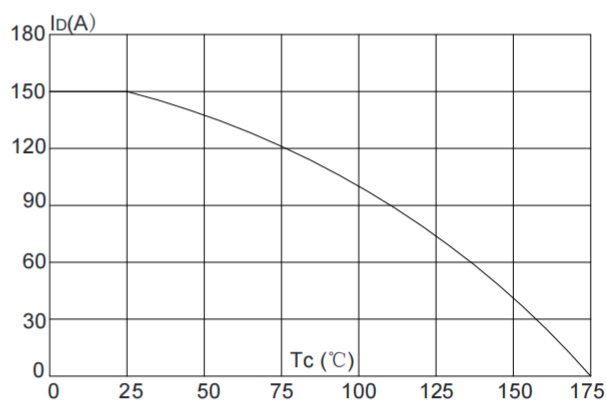


Figure 10: Maximum Continuous Drain Current vs. Case Temperature


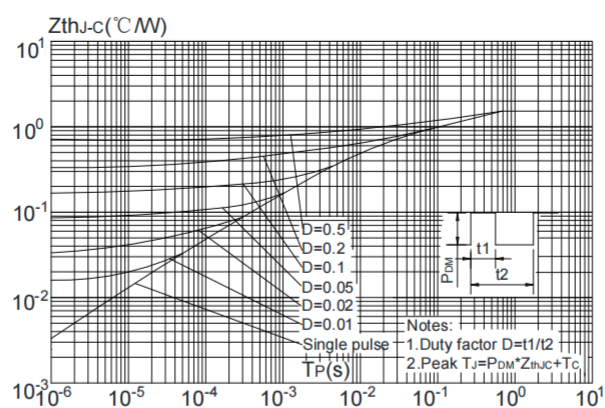


Figure.11: Maximum Effective
Transient Thermal Impedance, Junction-to-Case

Package Information

TO-252

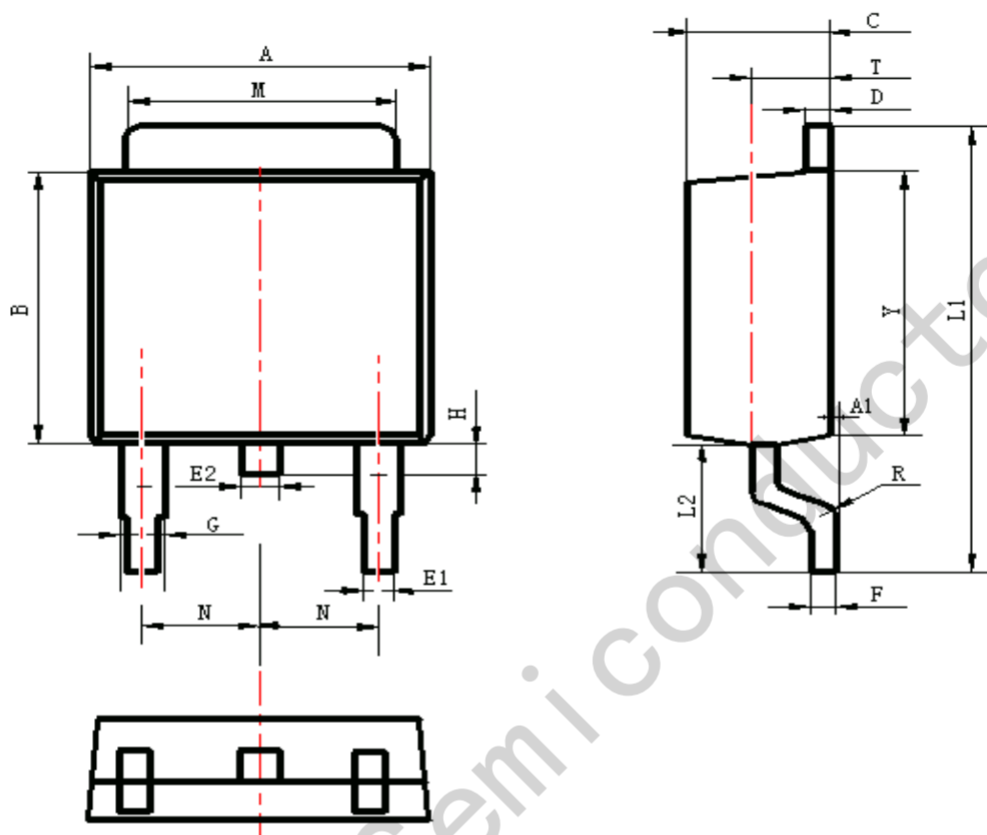

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	6.30	6.90	0.248	0.272
A1	0.00	0.16	0.000	0.006
B	5.70	6.30	0.224	0.248
C	2.10	2.50	0.083	0.098
D	0.30	0.70	0.012	0.028
E1	0.60	0.90	0.024	0.035
E2	0.70	1.00	0.028	0.039
F	0.30	0.60	0.012	0.024
G	0.70	1.20	0.028	0.047
L1	9.60	10.50	0.378	0.413
L2	2.70	3.10	0.106	0.122
H	0.40	1.00	0.016	0.039
M	5.10	5.50	0.201	0.217
N	2.09	2.49	0.082	0.098
R	0.30		0.012	
T	1.40	1.60	0.055	0.063
Y	5.10	6.30	0.201	0.248