SAMZO | REAC/ROHS

REV	ECN NO	DESRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2018.06.12

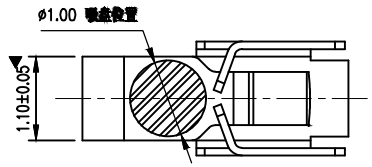

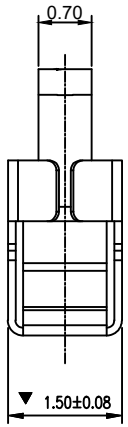

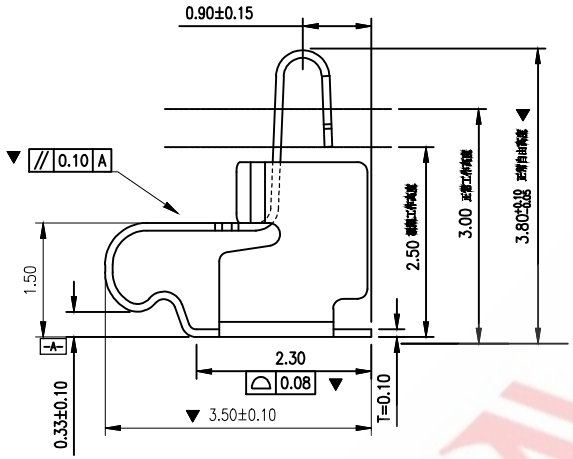



Technical Requirements:

1. Material: Stainless steel SUS301, T = 0.15 ± 0.005;
2. ▼Burrs are not allowed on the soldering surface and contact surface of the terminal tin feet, and the maximum burr on other parts is 0.03mm;
3. Twist: 45°/1000mm, arch 5mm/1000mm;
4. The dimensions marked with "▼" symbol are key control and inspection dimensions;
5. Unmarked R MAX R0.13;
6. The electroplating must pass the 48-hour salt spray test;
7. The life test is > 20,000 times, and the product elasticity is required to be between 60gf - 80gf
8. The nickel base is 50 - 80 U" min. The soldering area is gold-plated, and the contact area is gold-plated 3 U" min.

RF 35 15 38 - T J R

- Mould Code: R-Conventional
- Coating: Gold Plating
- Material: SUS301-T010
- Height: H 3.8mm
- Width: W 1.5mm
- Length: L 3.5mm
- Series: Antenna Spring





焊盘尺寸

尺寸公差 ±0.05

ITEM	DESCRIPTION	MATERIAL	QTY	FINSH/COLOR
A	本体	SUS301=T0.10mm	1	镀金3U

DESIGN	WANGGUIFA	2018.06.12
CHECKED	ZHENGUILAN	2018.06.12
APPROVED	LILIANJIANG	2018.06.14

GENERAL TOLERANCE	
⩾0~2<	±0.15
⩾2~5<	±0.25
⩾0~2<	±0.15
⩾5	±0.35

FIRST VIEW



SCALE	1:1	UNIT	mm

The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts.
WWW.KKK-JP.COM

SAMZO COMPONENTS

Electronic switch and connector manufacturer

TITLE:: RF Antenna Spring,SMT, (L3.5*W1.5*H3.8mm)

DWG NO: RF3515-P001

PART NO: RF35151101

MODEL NO: RF351538-TJR

NAME: RF SPRING