REV.	DESCRIPTION	ECN NO.	NAME	DATE

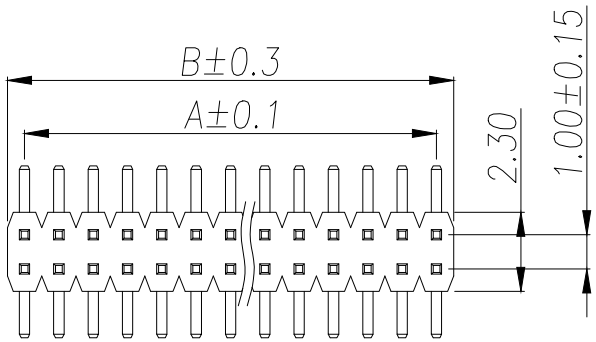

SPECIFICATIONS
Current Rating:0.75 Amps
Withstanding Voltage:AC 500V
Insulation Resistance:1000MΩ Min
Contact Resistance:20mΩ Max
Operation Temperature:−40°to+105°
Insrlator Material:Polyester(UL94V−0)
Contact Material:Phosphor bronze
Standard:PA6T
Contact Plating:Gold Flash
Max.Processing Temp:240°C for30−60seconds
(260°C for5seconds)

P/N	PIN	DIM.A	DIM.B
A100US−WS1P	1	0.00	1.00
A100US−WS2P	2	1.00	2.00
A100US−WS3P	3	2.00	3.00
A100US−WS4P	4	3.00	4.00
A100US−WS5P	5	4.00	5.00
A100US−WS6P	6	5.00	6.00
A100US−WS7P	7	6.00	7.00
A100US−WS8P	8	7.00	8.00
A100US−WS9P	9	8.00	9.00
.....	.....	.....	.....
A100US−WS40P	40	(PIN−1)	(PIN)

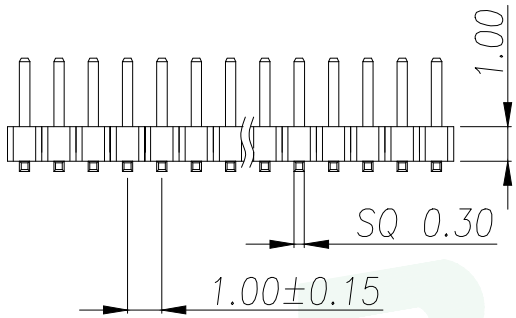

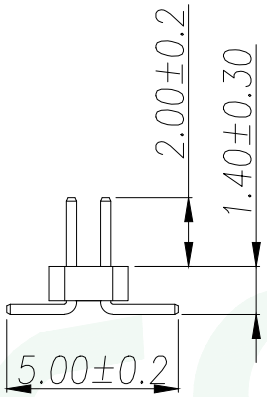

PART NUMBER DESCRIPTION:

A100US−WSNP

(PIN数量; 01.....50PIN)
(D= 单排; S= 双排)
(Z= 直脚; W= 弯脚)
(排针开关)

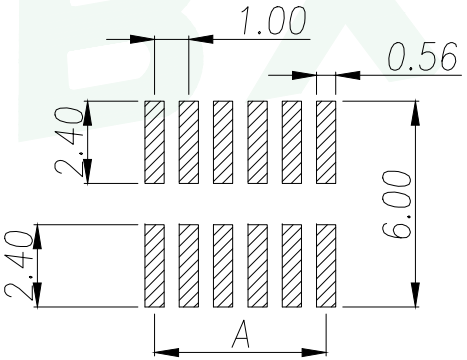

RECOMMEND P.C.B LAYOUT

PCB TOLERANCE:±0.05 (TOP VIEW)

GENERAL TOLERANCE	DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD				BXCONN®
DIM. TOL. X X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 GENERAL ANGLE: ±3°	TITLE: 1.0PH H1.0 2xnPin SMT W2.3 PC5.0 PA2.0 PB1.4 L5.0 6T				
	DWG. NO.: A100US−WSNP			DRAWN: MAX	
	PART NO.: A100US−WSNP			CHECKED: ELLA	
	UNIT: mm	SCALE: none	SHEET: 1of 1	DWG. SIZE: A4	LAYER: bxconn	APPROVED: WILL