



No.566-1, Kaoshi Rd., Yangmei, Taoyuan 32668, Taiwan (R.O.C.)

Fax : 886-3-4854959

**Date : 2023/06/05**

**Product Name : Medium Voltage Multilayer Ceramic Chip Capacitors**

## Part No. : FM Series

**Description : Size 0402~2225, C0G/X7R, 100Vdc~630Vdc**

|             |             |
|-------------|-------------|
| PREPARED BY | APPROVED BY |
|             |             |

信昌電子陶瓷股份有限公司

PROSPERITY DIELECTRICS CO., LTD.

桃園市楊梅區高獅路 566-1 號 <http://www.pdc.com.tw>

**Fax : 03-4854959**

**Contactor :** \_\_\_\_\_ **Mobile :** \_\_\_\_\_



信昌電子陶瓷股份有限公司

## Prosperity Dielectrics Co., Ltd.

No.566-1, Kaoshi Rd., Yangmei, Taoyuan 32668, Taiwan (R.O.C.)

Tel : 886-3-4753355

Fax : 886-3-4854959

# SPECIFICATION

FOR

Product Name : Medium Voltage Multilayer Ceramic Chip Capacitors

Part No. : FM Series

Description : Size 0402~2225, C0G/X7R, 100Vdc~630Vdc

SPEC. No. : FM-000-001-26

DATE : 2023/06/05

| DRAWN BY   | CHECEKED BY | APPROVED BY |
|------------|-------------|-------------|
| Jane Hsiao | Yvens Chou  | Jason Lin   |

### 1. INTRODUCTION

FM Series green type capacitors are manufactured by using green materials without lead and cadmium. These capacitors feature series connection of multi-layer capacitor units in a MLCC to realize high voltage performance. Reliable performances are built-in through exact formulation of dielectric powders, preparation of conductive paste, advanced automatic manufacturing, and strict quality control to assure excellent control in dielectric thickness, electrode integrity, and electrode-to-termination continuity.

### 2. FEATURES

- Medium voltage in a given case size.
- High reliability and stability.
- RoHS & HALOGEN compliant.

### 3. APPLICATIONS

- DC to DC converter.
- High voltage coupling/DC blocking.
- Back-lighting inverters.
- Snubbers in high frequency power converters.

### 4. HOW TO ORDER

| <u>FM</u>  | <u>31</u> | <u>X</u>   | <u>471</u>  | <u>K</u>  | <u>251</u>    | <u>P</u>  | <u>X</u>  | <u>G</u>     |
|------------|-----------|------------|-------------|-----------|---------------|-----------|-----------|--------------|
| PDC Family | Size      | Dielectric | Capacitance | Tolerance | Rated Voltage | Packaging | Thickness | Control Code |
| Table 1    | Table 2   | Table 3    | Table 4     | Table 5   | Table 6       | Table 7   | Table 8   | Table 9      |

| Table 1 | PDC Family                     |
|---------|--------------------------------|
| Code    | Description                    |
| FM      | 100V≤Rated Voltage≤630V series |

| Table 2 |             | Size |             |      |             |
|---------|-------------|------|-------------|------|-------------|
| Code    | Description | Code | Description | Code | Description |
| 15      | 0402 (1005) | 32   | 1210 (3225) | 52   | 2211 (5728) |
| 18      | 0603 (1608) | 42   | 1808 (4520) | 55   | 2220 (5750) |
| 21      | 0805 (2012) | 43   | 1812 (4532) | 56   | 2225 (5763) |
| 31      | 1206 (3216) | 46   | 1825 (4563) |      |             |

| Table 3 | Dielectric Material Characteristics |      |             |
|---------|-------------------------------------|------|-------------|
| Code    | Description                         | Code | Description |
| N       | C0G                                 | X    | X7R         |
|         |                                     |      |             |

| Table 4 |                              | Capacitance Rule Code |                                |
|---------|------------------------------|-----------------------|--------------------------------|
| Code    | Description                  | Code                  | Description                    |
| R47     | 0.47pF                       | 102                   | 102=10x10 <sup>2</sup> =1000pF |
| 0R5     | 0.5pF                        | 104                   | 104=10x10 <sup>4</sup> =100nF  |
| 100     | 100=10x10 <sup>0</sup> =10pF | 106                   | 106=10x10 <sup>6</sup> =10μF   |

| Table 5 |             | Tolerance |             |      |             |
|---------|-------------|-----------|-------------|------|-------------|
| Code    | Description | Code      | Description | Code | Description |
| A       | ±0.05 pF    | J         | ±5 %        | X    | +10%~+20%   |
| B       | ±0.10 pF    | K         | ±10 %       |      |             |
| C       | ±0.25 pF    | L         | 0% ~ +10%   |      |             |
| D       | ±0.50 pF    | M         | ±20 %       |      |             |
| F       | ±1 %        | N         | -5% ~ +10%  |      |             |
| G       | ±2 %        | P         | ±0.02 pF    |      |             |
| H       | ±3 %        | Q         | ±0.03 pF    |      |             |
| I       | -10% ~ 0%   | Z         | -20% ~ +80% |      |             |

| Table 6 |             | Rated Voltage |             |      |             |
|---------|-------------|---------------|-------------|------|-------------|
| Code    | Description | Code          | Description | Code | Description |
| 101     | 100Vdc      | 251           | 250Vdc      | 501  | 500Vdc      |
| 201     | 200Vdc      | 401           | 400Vdc      | 631  | 630Vdc      |

| Table 7 |                                  | Packaging Type |                               |
|---------|----------------------------------|----------------|-------------------------------|
| Code    | Description                      | Code           | Description                   |
| B       | Bulk                             | T              | Tray package                  |
| E       | Tape and 7" Reel, Embossed Tape  | P              | Tape and 7" Reel, Paper Tape  |
| K       | Tape and 10" Reel, Embossed Tape | D              | Tape and 10" Reel, Paper Tape |
| L       | Tape and 13" Reel, Embossed Tape | G              | Tape and 13" Reel, Paper Tape |

| Table 8 |                     | Thickness Description |                     |      |                |
|---------|---------------------|-----------------------|---------------------|------|----------------|
| Code    | Description         | Code                  | Description         | Code | Description    |
| A       | 0.60 ± 0.10 mm      | J                     | 1.15 ± 0.15 mm      | S    | 0.80 ± 0.07 mm |
| B       | 0.8 + 0.15/-0.10 mm | K                     | 0.50 ± 0.20 mm      | T    | 0.85 ± 0.10 mm |
| C       | 1.25 ± 0.10 mm      | L                     | 0.30 ± 0.03 mm      | U    | 0.50 ± 0.10 mm |
| D       | 1.40 ± 0.15 mm      | M                     | 0.95 ± 0.10 mm      | V    | 0.20 ± 0.02 mm |
| E       | 1.60 ± 0.20 mm      | N                     | 0.50 ± 0.05 mm      | W    | 0.50 ± 0.10 mm |
| F       | 2.00 ± 0.20 mm      | O                     | 3.50 ± 0.20 mm      | X    | 0.80 ± 0.10 mm |
| G       | 2.50 ± 0.30 mm      | P                     | 1.60 +0.3/-0.10 mm  | Z    | 0.25 ± 0.03 mm |
| H       | 2.80 ± 0.30 mm      | Q                     | 0.50 +0.02/-0.05 mm |      |                |
| I       | 1.25 ± 0.20 mm      | R                     | 3.10 ± 0.30 mm      |      |                |

| Table 9 | Special Control Code             |
|---------|----------------------------------|
| Code    | Description                      |
| G       | RoHS Compliant                   |
| Q       | Surface Coating (Size 1206~2225) |

## 5. EXTERNAL DIMENSIONS

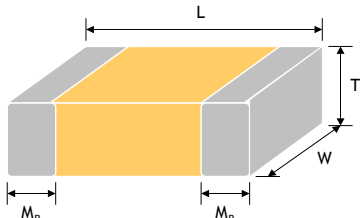
| Size Inch<br>(mm) | L<br>(mm)                                  | W<br>(mm)                                  | Code / T<br>(mm)                    | M <sub>B</sub><br>(mm) |  |
|-------------------|--------------------------------------------|--------------------------------------------|-------------------------------------|------------------------|-------------------------------------------------------------------------------------|
| 0402(1005)        | 1.00±0.10                                  | 0.50±0.10                                  | See<br>No.4<br>Reference<br>Table 8 | 0.25 +0.05/-<br>0.10   |                                                                                     |
| 0603(1608)        | 1.60±0.15                                  | 0.80±0.15                                  |                                     | 0.40±0.15              |                                                                                     |
| 0805(2012)        | 2.00±0.20                                  | 1.25±0.20                                  |                                     | 0.50±0.20              |                                                                                     |
| 1206(3216)        | 3.20±0.20<br>3.20 +0.30/-0.10 <sup>#</sup> | 1.60±0.20<br>1.60 +0.30/-0.10 <sup>#</sup> |                                     | 0.60±0.20              |                                                                                     |
| 1210(3225)        | 3.20±0.30                                  | 2.50±0.30                                  |                                     | 0.75±0.35              |                                                                                     |
| 1808(4520)        | 4.50±0.40                                  | 2.00±0.25                                  |                                     | 0.75±0.35              |                                                                                     |
| 1812(4532)        | 4.50±0.40                                  | 3.20±0.30                                  |                                     | 0.75±0.35              |                                                                                     |
| 1825(4563)        | 4.50±0.40                                  | 6.30±0.40                                  |                                     | 0.75±0.35              |                                                                                     |
| 2220(5750)        | 5.70±0.40                                  | 5.00±0.40                                  |                                     | 0.85±0.35              |                                                                                     |
| 2225(5763)        | 5.70±0.40                                  | 6.30±0.40                                  |                                     | 0.85±0.35              |                                                                                     |

Fig. 5.1 The outline of MLCC

<sup>#</sup>For 1206 size P thickness products.

## 6. GENERAL ELECTRICAL DATA

| Dielectric                         | C0G                                                        |                         | X7R                                                                                                                                                    |  |
|------------------------------------|------------------------------------------------------------|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Size                               | 0402, 0603, 0805, 1206, 1210, 1808, 1812, 1825, 2220, 2225 |                         | 0402, 0603, 0805, 1206, 1210, 1808, 1812, 1825, 2220, 2225                                                                                             |  |
| Rated voltage (WVDC)               | 100V, 200V, 250V, 500V, 630V                               |                         | 100V, 200V, 250V, 500V, 630V                                                                                                                           |  |
| Capacitance range                  | 0.5pF ~ 100nF                                              |                         | 100pF ~ 820nF                                                                                                                                          |  |
| Capacitance tolerance              | Reference to Table5                                        |                         | Reference to Table5                                                                                                                                    |  |
| Tan δ                              |                                                            |                         | ≤2.5% ~ ≤10.0%                                                                                                                                         |  |
|                                    | Cap. Rang                                                  | Q Spec.                 |                                                                                                                                                        |  |
|                                    | Cap.<30pF                                                  | Q≥400+20C               |                                                                                                                                                        |  |
|                                    | Cap.≥30pF                                                  | Q≥1000                  |                                                                                                                                                        |  |
| Capacitance & Tan δ Test condition | Measured at the condition of 30~70% related humidity       |                         |                                                                                                                                                        |  |
|                                    | For 25°C at ambient temperature                            |                         | Preconditioning for Class II MLCC : Perform a heat treatment at 150±10°C for 1 hour, then leave in ambient condition for 24±2 hours before measurement |  |
|                                    |                                                            |                         | 1.0±0.2Vrms, 1.0KHz±10%, at 25°C ambient temperature                                                                                                   |  |
|                                    | Cap. Rang                                                  | Test Condition          |                                                                                                                                                        |  |
|                                    | Cap.≤1000pF                                                | 1.0±0.2Vrms, 1.0MHz±10% |                                                                                                                                                        |  |
|                                    | Cap.>1000pF                                                | 1.0±0.2Vrms, 1.0KHz±10% |                                                                                                                                                        |  |
| Insulation resistance at Ur        | ≥10GΩ or RxC≥500Ω-F, whichever is smaller                  |                         | ≥10GΩ or RxC≥100Ω-F, whichever is smaller                                                                                                              |  |
| Operating temperature              | -55 to +125°C                                              |                         |                                                                                                                                                        |  |
| Capacitance characteristic         | ±30ppm/°C                                                  |                         | ±15%                                                                                                                                                   |  |
| Termination                        | Cu/Ni/Sn (lead-free termination)                           |                         |                                                                                                                                                        |  |

**7. CAPACITANCE RANGE****7-1. C0G**

| Dimension |      | 0402 |      |      | 0603 |      |      | 0805 |      |      |      |      | 1206 |      |      |      |      |
|-----------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Cap(pF)   | code | 100V | 200V | 250V | 100V | 200V | 250V | 100V | 200V | 250V | 500V | 630V | 100V | 200V | 250V | 500V | 630V |
| 0.5       | 0R5  | N    | N    | N    | S    | S    | S    | A    | A    | A    | A    | A    |      |      |      |      |      |
| 1.0       | 1R0  | N    | N    | N    | S    | S    | S    | A    | A    | A    | A    | A    |      |      |      |      |      |
| 1.2       | 1R2  | N    | N    | N    | S    | S    | S    | A    | A    | A    | A    | A    | X    |      |      | X    |      |
| 1.5       | 1R5  | N    | N    | N    | S    | S    | S    | A    | A    | A    | A    | A    | X    | X    | X    | X    | X    |
| 1.8       | 1R8  | N    | N    | N    | S    | S    | S    | A    | A    | A    | A    | A    | X    | X    | X    | X    | X    |
| 2.2       | 2R2  | N    | N    | N    | S    | S    | S    | A    | A    | A    | A    | A    | X    | X    | X    | X    | X    |
| 2.7       | 2R7  | N    | N    | N    | S    | S    | S    | A    | A    | A    | A    | A    | X    | X    | X    | X    | X    |
| 3.3       | 3R3  | N    | N    | N    | S    | S    | S    | A    | A    | A    | A    | A    | X    | X    | X    | X    | X    |
| 3.9       | 3R9  | N    | N    | N    | S    | S    | S    | A    | A    | A    | A    | A    | X    | X    | X    | X    | X    |
| 4.7       | 4R7  | N    | N    | N    | S    | S    | S    | A    | A    | A    | A    | A    | X    | X    | X    | X    | X    |
| 5.6       | 5R6  | N    | N    | N    | S    | S    | S    | A    | A    | A    | A    | A    | X    | X    | X    | X    | X    |
| 6.8       | 6R8  | N    | N    | N    | S    | S    | S    | A    | A    | A    | A    | A    | X    | X    | X    | X    | X    |
| 8.2       | 8R2  | N    | N    | N    | S    | S    | S    | A    | A    | A    | A    | A    | X    | X    | X    | X    | X    |
| 10        | 100  | N    | N    | N    | S    | S    | S    | A    | A    | A    | A    | A    | X    | X    | X    | X    | X    |
| 12        | 120  | N    | N    | N    | S    | S    | S    | A    | A    | A    | A    | A    | X    | X    | X    | X    | X    |
| 15        | 150  | N    | N    | N    | S    | S    | S    | A    | A    | A    | A    | A    | X    | X    | X    | X    | X    |
| 18        | 180  | N    | N    | N    | S    | S    | S    | A    | A    | A    | A    | A    | X    | X    | X    | X    | X    |
| 22        | 220  | N    | N    | N    | S    | S    | S    | A    | A    | A    | A    | A    | X    | X    | X    | X    | X    |
| 27        | 270  | N    | N    | N    | S    | S    | S    | A    | A    | A    | A    | A    | X    | X    | X    | X    | X    |
| 33        | 330  | N    | N    | N    | S    | S    | S    | A    | A    | A    | A    | A    | X    | X    | X    | X    | X    |
| 39        | 390  | N    | N    | N    | S    | S    | S    | A    | A    | A    | A    | A    | X    | X    | X    | X    | X    |
| 47        | 470  | N    | N    | N    | S    | S    | S    | A    | A    | A    | A    | A    | X    | X    | X    | X    | X    |
| 56        | 560  | N    | N    | N    | S    | S    | S    | A    | A    | A    | A    | A    | X    | X    | X    | X    | X    |
| 68        | 680  | N    | N    |      | S    | S    | S    | A    | A    | A    | A    | A    | X    | X    | X    | X    | X    |
| 82        | 820  | N    | N    |      | S    | S    | S    | A    | A    | A    | X    | X    | X    | X    | X    | X    | X    |
| 100       | 101  | N    | N    |      | S    | S    | S    | A    | A    | X    | X    | X    | X    | X    | X    | X    | X    |
| 120       | 121  | N    |      |      | S    | S    | S    | A    | A    | X    | C    | C    | X    | X    | X    | X    | X    |
| 150       | 151  | N    |      |      | S    | S    | S    | A    | X    | X    | C    | C    | X    | X    | X    | X    | X    |
| 180       | 181  | N    |      |      | S    | S    | S    | A    | X    | C    | C    | C    | X    | X    | X    | X    | X    |
| 220       | 221  | N    |      |      | S    | S    | S    | A    | C    | C    | C    | C    | X    | X    | X    | X    | X    |
| 270       | 271  |      |      |      | S    | B    | B    | A    | C    | C    | C    | C    | X    | X    | M    | M    | M    |
| 330       | 331  |      |      |      | S    | B    | B    | A    | C    | C    | C    | C    | X    | X    | M    | M    | M    |
| 390       | 391  |      |      |      | S    | B    | B    | X    | C    | C    | C    | C    | X    | X    | M    | M    | M    |
| 470       | 471  |      |      |      | S    | B    | B    | X    | C    | C    | I    | I    | X    | M    | M    | M    | M    |
| 560       | 561  |      |      |      | S    | B    | B    | X    | C    | C    | I    | I    | X    | M    | C    | C    | C    |
| 680       | 681  |      |      |      | S    | B    | B    | X    | C    | C    | I    | I    | X    | M    | C    | C    | C    |
| 820       | 821  |      |      |      | S    | B    | B    | X    | C    | C    | I    | I    | X    | M    | E    | E    | E    |
| 1000      | 102  |      |      |      | S    | B    | B    | X    | C    | C    | I    | I    | X    | M    | E    | E    | E    |
| 1200      | 122  |      |      |      | B    | B    | B    | X    | C    | C    | I    | I    | X    | M    | E    | E    | E    |
| 1500      | 152  |      |      |      | B    | B    | B    | X    | C    | C    | I    | I    | X    | C    | E    | E    | E    |
| 1800      | 182  |      |      |      | B    | B    | B    | X    | C    | C    | I    | I    | X    | C    | E    | E    | E    |
| 2200      | 222  |      |      |      | B    | B    | B    | X    | C    | C    | I    | I    | M    | C    | E    | E    | E    |
| 2700      | 272  |      |      |      |      |      |      | C    | C/I  | C/I  |      |      | M    | C    | E    | E    | E    |
| 3300      | 332  |      |      |      |      |      |      | C    | I    | I    |      |      | C    | C    | E    | E    | E    |
| 3900      | 392  |      |      |      |      |      |      | C    | I    | I    |      |      | C    | E    | E    | E    | E    |
| 4700      | 472  |      |      |      |      |      |      | C    | I    | I    |      |      | C    | E    | E    | E    | E    |
| 5600      | 562  |      |      |      |      |      |      | C    |      |      |      |      | E    | E    | E    | E    | E    |
| 6800      | 682  |      |      |      |      |      |      | C    |      |      |      |      | E    | E    | E    | E    | C/E  |
| 8200      | 822  |      |      |      |      |      |      | C    |      |      |      |      | E    | E    | E    | E    | E    |
| 10000     | 103  |      |      |      |      |      |      | C    |      |      |      |      | E    | E    | E    | E    | E    |
| 12000     | 123  |      |      |      |      |      |      | C    |      |      |      |      | P    |      |      |      |      |
| 15000     | 153  |      |      |      |      |      |      | C    |      |      |      |      | P    |      |      |      |      |
| 18000     | 183  |      |      |      |      |      |      | C    |      |      |      |      | P    |      |      |      |      |
| 22000     | 223  |      |      |      |      |      |      | C    |      |      |      |      | P    |      |      |      |      |
| 27000     | 273  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 33000     | 333  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |

**7. CAPACITANCE RANGE****7-1. C0G**

| Dimension |      | 1210 |       |       |      |      | 1808 |      |      |      |      | 1812 |      |      |      |      |
|-----------|------|------|-------|-------|------|------|------|------|------|------|------|------|------|------|------|------|
| Cap(pF)   | code | 100V | 200V  | 250V  | 500V | 630V | 100V | 200V | 250V | 500V | 630V | 100V | 200V | 250V | 500V | 630V |
| 2.2       | 2R2  |      |       |       |      |      | C    | C    | C    | C    | C    |      |      |      |      |      |
| 2.7       | 2R7  |      |       |       |      |      | C    | C    | C    | C    | C    |      |      |      |      |      |
| 3.3       | 3R3  |      |       |       |      |      | C    | C    | C    | C    | C    |      |      |      |      |      |
| 3.9       | 3R9  |      |       |       |      |      | C    | C    | C    | C    | C    |      |      |      |      |      |
| 4.7       | 4R7  |      |       |       |      |      | C    | C    | C    | C    | C    |      |      |      |      |      |
| 5.6       | 5R6  |      |       |       |      |      | C    | C    | C    | C    | C    |      |      |      |      |      |
| 6.8       | 6R8  |      |       |       |      |      | C    | C    | C    | C    | C    |      |      |      |      |      |
| 8.2       | 8R2  |      |       |       |      |      | C    | C    | C    | C    | C    |      |      |      |      |      |
| 10        | 100  | M    | M     | M     | M    | M    | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 12        | 120  | M    | M     | M     | M    | M    | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 15        | 150  | M    | M     | M     | M    | M    | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 18        | 180  | M    | M     | M     | M    | M    | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 22        | 220  | M    | M     | M     | M    | M    | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 27        | 270  | M    | M     | M     | M    | M    | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 33        | 330  | M    | M     | M     | M    | M    | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 39        | 390  | M    | M     | M     | M    | M    | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 47        | 470  | M    | M     | M     | M    | M    | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 56        | 560  | M    | M     | M     | M    | M    | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 68        | 680  | M    | M     | M     | M    | M    | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 82        | 820  | M    | M     | M     | M    | M    | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 100       | 101  | M    | M     | M     | M    | M    | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 120       | 121  | M    | M     | M     | M    | M    | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 150       | 151  | M    | M     | M     | M    | M    | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 180       | 181  | M    | M     | M     | M    | M    | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 220       | 221  | M    | M     | M     | M    | M    | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 270       | 271  | M    | M     | M     | M    | M    | C    | C    | C    | F    | F    | C    | C    | C    | C    | C    |
| 330       | 331  | M    | M     | M     | M    | M    | C    | C    | C    | F    | F    | C    | C    | C    | C    | C    |
| 390       | 391  | M    | M     | M     | M    | M    | C    | C    | C    | F    | F    | C    | C    | C    | C    | C    |
| 470       | 471  | M    | M     | M     | M    | M    | C    | C    | C    | F    | F    | C    | C    | C    | C    | C    |
| 560       | 561  | M    | M     | M     | M    | M    | C    | C    | C    | F    | F    | C    | C    | C    | C    | C    |
| 680       | 681  | M    | M     | M     | M    | M    | C    | C    | C    | F    | F    | C    | C    | C    | C    | C    |
| 820       | 821  | M    | M     | M     | M    | M    | C    | C    | C    | F    | F    | C    | C    | C    | C    | C    |
| 1000      | 102  | M    | C     | C     | C    | C    | C    | C    | C    | F    | F    | C    | C    | C    | C    | C    |
| 1200      | 122  | M    | C     | C     | C    | C    | C    | C    | C    | F    | F    | C    | C    | C    | C    | C    |
| 1500      | 152  | M    | C     | C     | C    | C    | C    | C    | C    | F    | F    | C    | C    | C    | C    | C    |
| 1800      | 182  | M    | C     | C     | C    | C    | C    | C    | C    | F    | F    | C    | C    | C    | C    | C    |
| 2200      | 222  | M    | C     | C     | C    | C    | C    | C    | C    | F    | F    | C    | C    | C    | C    | C    |
| 2700      | 272  | M    | C     | C     | C    | C    | C    | C    | C    | F    | F    | C    | C    | C    | C    | C    |
| 3300      | 332  | M    | C     | C     | C    | C    | C    | C    | C    | F    | F    | C    | C    | C    | C    | C    |
| 3900      | 392  | M    | C     | C     | C    | C    | C    | C    | C    |      |      | C    | C    | C    | C    | C    |
| 4700      | 472  | M    | E/C   | E/C   | C    | C    | C    | C    | C    |      |      | C    | C    | C    | C    | C    |
| 5600      | 562  | C    | E/C   | E/C   | C    | C    | C    | E    | E    |      |      | C    | C    | C    | C    | C    |
| 6800      | 682  | C    | E     | E     | E/C  | E/C  | C    | E    | E    |      |      | C    | C    | C    | C    | C    |
| 8200      | 822  | C    | E     | E     | E    | E    | E    | F    | F    |      |      | C    | C    | C    | C    | C    |
| 10000     | 103  | E    | F     | F     | F    | F    | E    | F    | F    |      |      | C    | C    | C    | C    | C    |
| 12000     | 123  | E    | C/E/F | C/E/F | F    | F    |      |      |      |      |      | C    | E    | E    | E    | E    |
| 15000     | 153  | F    | C/E/F | C/E/F | G    | G    |      |      |      |      |      | C    | E    | E    | E    | E    |
| 18000     | 183  | F/G  | E/F/G | E/F   | G    | G    |      |      |      |      |      | E    | F    | F    | F    | F    |
| 22000     | 223  | F/G  | E/F/G | E/F   | G    | G    |      |      |      |      |      | E    | F    | F    | F    | F    |
| 27000     | 273  | F    | F     | F     | G    | G    |      |      |      |      |      | F    | G    | G    |      |      |
| 33000     | 333  | F    | F/G   | F/G   | G    | G    |      |      |      |      |      | F    |      |      |      |      |
| 39000     | 393  | F    | F     | F     |      |      |      |      |      |      |      | G    |      |      |      |      |
| 47000     | 473  | F    | F     | F     |      |      |      |      |      |      |      | G    |      |      |      |      |
| 56000     | 563  |      |       |       |      |      |      |      |      |      |      | G    |      |      |      |      |
| 68000     | 683  |      |       |       |      |      |      |      |      |      |      | G    |      |      |      |      |
| 82000     | 823  |      |       |       |      |      |      |      |      |      |      | G    |      |      |      |      |
| 100000    | 104  |      |       |       |      |      |      |      |      |      |      | G    |      |      |      |      |

**7. CAPACITANCE RANGE****7-1. C0G**

| Dimension |      | 1825 |      |      |      |      | 2220 |      |      |      |      | 2225 |      |      |      |      |
|-----------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Cap(pF)   | code | 100V | 200V | 250V | 500V | 630V | 100V | 200V | 250V | 500V | 630V | 100V | 200V | 250V | 500V | 630V |
| 10        | 100  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 12        | 120  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 15        | 150  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 18        | 180  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 22        | 220  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 27        | 270  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 33        | 330  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 39        | 390  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 47        | 470  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 56        | 560  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 68        | 680  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 82        | 820  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 100       | 101  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 120       | 121  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 150       | 151  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 180       | 181  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 220       | 221  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 270       | 271  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 330       | 331  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 390       | 391  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 470       | 471  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 560       | 561  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 680       | 681  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 820       | 821  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 1000      | 102  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 1200      | 122  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 1500      | 152  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 1800      | 182  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 2200      | 222  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 2700      | 272  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 3300      | 332  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 3900      | 392  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 4700      | 472  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 5600      | 562  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 6800      | 682  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 8200      | 822  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 10000     | 103  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 12000     | 123  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 15000     | 153  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 18000     | 183  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 22000     | 223  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 27000     | 273  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 33000     | 333  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 39000     | 393  | F    | F    | F    | G    | G    | F    | F    | F    | G    | F    | F    | F    | F    | F    | F    |
| 47000     | 473  | F    | F    | F    |      |      | F    | G    | G    | G    | F    | F    | F    | F    | F    | F    |
| 56000     | 563  | F    | G    | G    |      |      | F    | G    | G    |      | G    | F    | G    | G    | G    | G    |
| 68000     | 683  | F    | G    | G    |      |      | F    | G    | G    |      | H    | F    | G    | G    | G    | G    |
| 82000     | 823  | G    |      |      |      |      | G    |      |      |      | H    | F    | G    | G    | G    |      |
| 100000    | 104  | G    |      |      |      |      | G    |      |      |      | H    | G    | G    | G    |      |      |
| 120000    | 124  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 150000    | 154  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 180000    | 184  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 220000    | 224  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |

**7. CAPACITANCE RANGE****7-2. X7R**

| Dimension |      | 0402 | 0603 |      |      | 0805 |      |      |      |      | 1206 |      |      |      |            |      |
|-----------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------------|------|
| Cap(pF)   | code | 100V | 100V | 200V | 250V | 100V | 200V | 250V | 500V | 630V | 100V | 200V | 250V | 500V | 400<br>450 | 630V |
| 100       | 101  | N    | S    | B    | B    | X    | X    | X    | X    | X    | X    | C    | C    | C    |            | C    |
| 120       | 121  | N    | S    | B    | B    | X    | X    | X    | X    | X    | X    | C    | C    | C    |            | C    |
| 150       | 151  | N    | S    | B    | B    | X    | X    | X    | X    | X    | X    | C    | C    | C    |            | C    |
| 180       | 181  | N    | S    | B    | B    | X    | X    | X    | X    | X    | X    | C    | C    | C    |            | C    |
| 220       | 221  | N    | S    | B    | B    | X    | X    | X    | X    | X    | X    | C    | C    | C    |            | C    |
| 270       | 271  | N    | S    | B    | B    | X    | X    | X    | X    | X    | X    | C    | C    | C    |            | C    |
| 330       | 331  | N    | S    | B    | B    | X    | X    | X    | X    | X    | X    | C    | C    | C    |            | C    |
| 390       | 391  | N    | S    | B    | B    | X    | X    | X    | X    | X    | X    | C    | C    | C    |            | C    |
| 470       | 471  | N    | S    | B    | B    | X    | X    | X    | X    | X    | X    | C    | C    | C    |            | C    |
| 560       | 561  | N    | S    | B    | B    | X    | X    | X    | X    | X    | X    | C    | C    | C    |            | C    |
| 680       | 681  | N    | S    | B    | B    | X    | X    | X    | X    | X    | X    | C    | C    | C    |            | C    |
| 820       | 821  | N    | S    | B    | B    | X    | X    | X    | X    | X    | X    | C    | C    | C    |            | C    |
| 1000      | 102  | N    | S    | B    | B    | X    | X    | X    | X    | X    | X    | C    | C    | C    |            | C    |
| 1200      | 122  | N    | S    | B    | B    | X    | X    | X    | X    | X    | X    | C    | C    | C    |            | C    |
| 1500      | 152  | N    | S    | B    | B    | X    | X    | X    | X    | X    | X    | C    | C    | C    |            | C    |
| 1800      | 182  | N    | S    | B    | B    | X    | X    | X    | X    | X    | X    | C    | C    | C    |            | C    |
| 2200      | 222  | N    | S    | B    | B    | X    | X    | X    | X    | X    | X    | C    | C    | C    |            | C    |
| 2700      | 272  | N    | S    | B    | B    | X    | X    | X    | X    | X    | X    | C    | C    | C    |            | C    |
| 3300      | 332  | N    | S    | B    | B    | X    | X    | X    | X    | X    | X    | C    | C    | C    |            | C    |
| 3900      | 392  | N    | S    | B    | B    | X    | X    | X    | X    | X    | X    | C    | C    | C    |            | C    |
| 4700      | 472  | N    | S    | B    | B    | X    | X    | X    | C    | C    | X    | C    | C    | C    |            | C    |
| 5600      | 562  |      | S    | B    | B    | X    | X    | X    | C    | C    | X    | C    | C    | C    |            | C    |
| 6800      | 682  |      | S    | B    | B    | X    | X    | X    | C    | C    | X    | C    | C    | C    |            | C    |
| 8200      | 822  |      | S    | B    | B    | X    | X    | X    | C    | C    | X    | C    | C    | C    |            | C    |
| 10000     | 103  |      | S    | B    | B    | X    | C    | C    | C    | C    | X    | C    | C    | C    |            | C    |
| 12000     | 123  |      | B    |      |      | X    | C    | C    | C    | C    | X    | C    | C    | C    |            | C    |
| 15000     | 153  |      | B    |      |      | X    | C    | C    | C    | C    | X    | C    | C    | C    |            | C    |
| 18000     | 183  |      | B    |      |      | X    | C    | C    | C    | C    | X    | C    | C    | C    |            | C    |
| 22000     | 223  |      | B    |      |      | X    | C    | C    | C    | C    | X    | C    | C    | E    |            | E    |
| 27000     | 273  |      | B    |      |      | C    | C    | C    | C    | C    | X    | C    | C    | E    |            | E    |
| 33000     | 333  |      | B    |      |      | C    | C    | C    | C    |      | X    | E    | E    | E    |            | E    |
| 39000     | 393  |      | B    |      |      | C    | C    | C    |      |      | X    | E    | E    | E    |            | E    |
| 47000     | 473  |      | B    |      |      | C    | C    | C    |      |      | X    | E    | E    | E    |            | E    |
| 56000     | 563  |      | B    |      |      | C    | C    | C    |      |      | X    | E    | E    | E    |            | E    |
| 68000     | 683  |      | B    |      |      | C    | C    | C    |      |      | X    | E    | E    |      | E          |      |
| 82000     | 823  |      | B    |      |      | C    | C    |      |      |      | C    | E    | E    |      | E          |      |
| 100000    | 104  |      | B    |      |      | C    | C    |      |      |      | C    | E    | E    |      | E          |      |
| 120000    | 124  |      |      |      |      | I    |      |      |      |      | C    | E    | E    |      |            |      |
| 150000    | 154  |      |      |      |      | I    |      |      |      |      | E    | E    | E    |      |            |      |
| 180000    | 184  |      |      |      |      | I    |      |      |      |      | E    | E    | E    |      |            |      |
| 220000    | 224  |      |      |      |      | I    |      |      |      |      | E    | E    | E    |      |            |      |
| 270000    | 274  |      |      |      |      | I    |      |      |      |      | E    |      |      |      |            |      |
| 330000    | 334  |      |      |      |      | I    |      |      |      |      | E    |      |      |      |            |      |
| 390000    | 394  |      |      |      |      | I    |      |      |      |      | E    |      |      |      |            |      |
| 470000    | 474  |      |      |      |      | I    |      |      |      |      | E    |      |      |      |            |      |
| 560000    | 564  |      |      |      |      |      |      |      |      |      | P    |      |      |      |            |      |
| 680000    | 684  |      |      |      |      |      |      |      |      |      | P    |      |      |      |            |      |
| 820000    | 824  |      |      |      |      |      |      |      |      |      | P    |      |      |      |            |      |

**7. CAPACITANCE RANGE****7-2. X7R**

| Dimension |      | 1210 |      |      |            |      |      | 1808 |      | 1812 |      |      |      |      |      |
|-----------|------|------|------|------|------------|------|------|------|------|------|------|------|------|------|------|
| Cap(pF)   | code | 100V | 200V | 250V | 400<br>450 | 500V | 630V | 500V | 630V | 100V | 200V | 250V | 450V | 500V | 630V |
| 100       | 101  |      |      |      |            |      |      |      |      |      |      |      |      |      |      |
| 120       | 121  |      |      |      |            |      |      |      |      |      |      |      |      |      |      |
| 150       | 151  |      |      |      |            |      |      | C    | C    |      |      |      |      |      |      |
| 180       | 181  |      |      |      |            |      |      | C    | C    |      |      |      |      |      |      |
| 220       | 221  | M    | M    | M    |            | C    | C    | C    | C    |      |      |      |      |      |      |
| 270       | 271  | M    | M    | M    |            | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 330       | 331  | M    | M    | M    |            | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 390       | 391  | M    | M    | M    |            | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 470       | 471  | M    | M    | M    |            | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 560       | 561  | M    | M    | M    |            | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 680       | 681  | M    | M    | M    |            | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 820       | 821  | M    | M    | M    |            | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 1000      | 102  | M    | M    | M    |            | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 1200      | 122  | M    | M    | M    |            | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 1500      | 152  | M    | M    | M    |            | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 1800      | 182  | M    | M    | M    |            | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 2200      | 222  | M    | M    | M    |            | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 2700      | 272  | M    | M    | M    |            | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 3300      | 332  | M    | M    | M    |            | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 3900      | 392  | M    | M    | M    |            | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 4700      | 472  | M    | M    | M    |            | C    | C    | C    | C    | C    | C    | C    | C    | C    | C    |
| 5600      | 562  | M    | M    | M    |            | C    | C    | F    | F    | C    | C    | C    | C    | C    | C    |
| 6800      | 682  | M    | M    | M    |            | C    | C    | F    | F    | C    | C    | C    | C    | C    | C    |
| 8200      | 822  | M    | M    | M    |            | C    | C    | F    | F    | C    | C    | C    | C    | C    | C    |
| 10000     | 103  | M    | M    | M    |            | C    | C    | F    | F    | C    | C    | C    | C    | C    | C    |
| 12000     | 123  | M    | M    | M    |            | C    | C    | F    | F    | C    | C    | C    | C    | C    | C    |
| 15000     | 153  | M    | M    | M    |            | C    | C    | F    | F    | C    | C    | C    | C    | C    | C    |
| 18000     | 183  | M    | M    | M    |            | C    | C    | F    | F    | C    | C    | C    | C    | C    | C    |
| 22000     | 223  | M    | M    | M    |            | C    | C    | F    | F    | C    | C    | C    | C    | C    | C    |
| 27000     | 273  | M    | M    | M    |            | E    | E    | F    | F    | C    | C    | C    | C    | C    | C    |
| 33000     | 333  | M    | M    | M    |            | E    | E    | F    | F    | C    | C    | C    | C    | C    | C    |
| 39000     | 393  | M    | M    | M    |            | E    | E    | F    | F    | C    | C    | C    | C    | C    | C    |
| 47000     | 473  | M    | C    | C    |            | E    | E    | F    | F    | C    | C    | C    | C    | C    | C    |
| 56000     | 563  | M    | C    | E    |            | E    | E    | F    | F    | C    | C    | C    | F    | F    | F    |
| 68000     | 683  | M    | E    | E    |            | F/E  | F/E  | F    | F    | C    | C    | C    | F    | F    | F    |
| 82000     | 823  | M    | E    | E    |            | F    | F    | F    | F    | C    | C    | C    | F    | F    | F    |
| 100000    | 104  | M    | E    | E    |            | F    | F    |      |      | C    | C    | C    | F    | F    | F    |
| 120000    | 124  | M    | E    | E    | G          | G    | G    |      |      | C    | C    | C    | G    | G    | G    |
| 150000    | 154  | C    | G    | G    | G          | G    | G    |      |      | C    | F    | F    | G    | G    | G    |
| 180000    | 184  | C    | G    | G    | G          |      |      |      |      | C    | F    | F    | G    | G    | G    |
| 220000    | 224  | C    | G    | G    | G          |      |      |      |      | C    | F    | F    | G    | G    | G    |
| 270000    | 274  | E    | G    | G    | G          |      |      |      |      | C    | F    | F    | G    | G    |      |
| 330000    | 334  | E    | G    | G    | G          |      |      |      |      | C    | F    | F    | G    | G    |      |
| 390000    | 394  | G    | G    | G    |            |      |      |      |      | C    | F    | F    | G    | G    |      |
| 470000    | 474  | G    | G    | G    |            |      |      |      |      | F    | F    | F    | G    | G    |      |
| 560000    | 564  | G    | G    | G    |            |      |      |      |      | F    | G    | G    | G    |      |      |
| 680000    | 684  | F    | G    | G    |            |      |      |      |      | F    | G    | G    | G    |      |      |
| 820000    | 824  | F    |      |      |            |      |      |      |      | F    | G    | G    | H    |      |      |

**7. CAPACITANCE RANGE****7-2. X7R**

| Dimension |      | 1825 |      |      |      |      | 2220 |      |      |      |      | 2225 |      |      |      |      |
|-----------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Cap(pF)   | code | 100V | 200V | 250V | 500V | 630V | 100V | 200V | 250V | 500V | 630V | 100V | 200V | 250V | 500V | 630V |
| 1000      | 102  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 1200      | 122  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 1500      | 152  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 1800      | 182  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 2200      | 222  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 2700      | 272  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 3300      | 332  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 3900      | 392  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 4700      | 472  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 5600      | 562  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 6800      | 682  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 8200      | 822  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 10000     | 103  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 12000     | 123  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 15000     | 153  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 18000     | 183  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 22000     | 223  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 27000     | 273  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 33000     | 333  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 39000     | 393  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 47000     | 473  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 56000     | 563  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 68000     | 683  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 82000     | 823  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 100000    | 104  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 120000    | 124  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 150000    | 154  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 180000    | 184  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 220000    | 224  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 270000    | 274  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 330000    | 334  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 390000    | 394  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 470000    | 474  | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    | F    |
| 560000    | 564  | F    | F    | F    | G    | G    | F    | F    | F    | G    | G    | F    | F    | F    | F    | F    |
| 680000    | 684  | F    | F    | F    |      |      | F    | F    | F    | G    | G    | F    | F    | F    |      |      |
| 820000    | 824  | F    | F    | F    |      |      | F    | F    | F    | H    | H    | F    | F    | F    |      |      |



## 8. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

| No.        | Item                                                                   | Test Condition                                                                                                                                                                                                                                                                                                                                                                              | Requirements                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
|------------|------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|----------------------------|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|--------------------|-----------------|---------------------------------------------------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|--------------|-----------------------------------------------|-------------------------------------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1.         | Visual and Dimensions                                                  | ---                                                                                                                                                                                                                                                                                                                                                                                         | * No remarkable defect.<br>* Dimensions to confirm to individual specification sheet.                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
| 2.         | Capacitance                                                            |                                                                                                                                                                                                                                                                                                                                                                                             | * Shall not exceed the limits given in the detailed spec.                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
| 3.         | Q/ D.F.<br>(Tangent of loss angle)                                     | * Class I : C0G<br>Cap.≤1000pF, 1.0±0.2Vrms, 1MHz±10%.<br>Cap.>1000pF, 1.0±0.2Vrms, 1KHz±10%.<br>* Class II : (X7R)<br>1.0±0.2Vrms, 1KHz±10%.                                                                                                                                                                                                                                               | <table><tr><th>Dielectric</th><th>Q/D.F.</th><th>Remark</th></tr><tr><td rowspan="2">Class I<br/>(C0G)</td><td>Q≥1000</td><td>Cap.≥30pF</td></tr><tr><td>Q≥400+20C</td><td>Cap.&lt;30pF</td></tr><tr><td rowspan="4">Class II</td><td>D.F.≤2.5%</td><td>X7R items</td></tr><tr><td>D.F.≤3.5%</td><td>X7R 0603≥0.047μF, 0805=0.1μF, 1206≥0.47μF</td></tr><tr><td>D.F.≤5.0%</td><td>X7R 0603≥0.068μF, 0805&gt;0.1μF<br/>All Y5V items</td></tr><tr><td>D.F.≤10.0%</td><td>X7R 0805&gt;0.22μF</td></tr></table> | Dielectric                                         | Q/D.F.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Remark            | Class I<br>(C0G)           | Q≥1000            | Cap.≥30pF                                                                                                                                               | Q≥400+20C                  | Cap.<30pF          | Class II        | D.F.≤2.5%                                         | X7R items | D.F.≤3.5%                                                                                                                                                                                                               | X7R 0603≥0.047μF, 0805=0.1μF, 1206≥0.47μF | D.F.≤5.0%    | X7R 0603≥0.068μF, 0805>0.1μF<br>All Y5V items | D.F.≤10.0%                                | X7R 0805>0.22μF |                                                                                                                                                                                                                                                                               |
|            |                                                                        |                                                                                                                                                                                                                                                                                                                                                                                             | Dielectric                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Q/D.F.                                             | Remark                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
|            |                                                                        |                                                                                                                                                                                                                                                                                                                                                                                             | Class I<br>(C0G)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Q≥1000                                             | Cap.≥30pF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
|            |                                                                        |                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Q≥400+20C                                          | Cap.<30pF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
|            |                                                                        |                                                                                                                                                                                                                                                                                                                                                                                             | Class II                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | D.F.≤2.5%                                          | X7R items                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
| D.F.≤3.5%  | X7R 0603≥0.047μF, 0805=0.1μF, 1206≥0.47μF                              |                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
| D.F.≤5.0%  | X7R 0603≥0.068μF, 0805>0.1μF<br>All Y5V items                          |                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
| D.F.≤10.0% | X7R 0805>0.22μF                                                        |                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
| 4.         | Temperature Coefficient<br>(Temperature characteristic of capacitance) | * With no electrical load.<br><table><tr><th>T.C.</th><th>Operating Temp.</th></tr><tr><td>C0G</td><td>-55~125°C at 25°C</td></tr><tr><td>X7R</td><td>-55~125°C at 25°C</td></tr></table>                                                                                                                                                                                                   | T.C.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Operating Temp.                                    | C0G                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | -55~125°C at 25°C | X7R                        | -55~125°C at 25°C | <table><tr><th>T.C.</th><th>Capacitance Change</th></tr><tr><td>C0G</td><td>Within ±30ppm/°C</td></tr><tr><td>X7R</td><td>Within ±15%</td></tr></table> | T.C.                       | Capacitance Change | C0G             | Within ±30ppm/°C                                  | X7R       | Within ±15%                                                                                                                                                                                                             |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
|            |                                                                        |                                                                                                                                                                                                                                                                                                                                                                                             | T.C.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Operating Temp.                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
|            |                                                                        |                                                                                                                                                                                                                                                                                                                                                                                             | C0G                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | -55~125°C at 25°C                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
|            |                                                                        |                                                                                                                                                                                                                                                                                                                                                                                             | X7R                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | -55~125°C at 25°C                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
| T.C.       | Capacitance Change                                                     |                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
| C0G        | Within ±30ppm/°C                                                       |                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
| X7R        | Within ±15%                                                            |                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
| 5.         | Insulation Resistance                                                  | <table><tr><th>Rated Vol.(V)</th><th>Apply Voltage</th><th>Test Condition</th></tr><tr><td>=100</td><td>1 times of UR</td><td>Max. 120 sec.</td></tr><tr><td>200≤V≤500</td><td>1 times of UR</td><td>60 sec.</td></tr><tr><td>&gt;500</td><td>500Vdc</td><td>60 sec.</td></tr></table>                                                                                                      | Rated Vol.(V)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Apply Voltage                                      | Test Condition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | =100              | 1 times of UR              | Max. 120 sec.     | 200≤V≤500                                                                                                                                               | 1 times of UR              | 60 sec.            | >500            | 500Vdc                                            | 60 sec.   | <table><tr><th>Dielectric</th><th>Requirements</th></tr><tr><td>Class I</td><td>≥10GΩ or RxC≥500Ω-F, whichever is smaller</td></tr><tr><td>Class II</td><td>≥10GΩ or RxC≥100Ω-F, whichever is smaller</td></tr></table> | Dielectric                                | Requirements | Class I                                       | ≥10GΩ or RxC≥500Ω-F, whichever is smaller | Class II        | ≥10GΩ or RxC≥100Ω-F, whichever is smaller                                                                                                                                                                                                                                     |
|            |                                                                        |                                                                                                                                                                                                                                                                                                                                                                                             | Rated Vol.(V)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Apply Voltage                                      | Test Condition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
|            |                                                                        |                                                                                                                                                                                                                                                                                                                                                                                             | =100                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 1 times of UR                                      | Max. 120 sec.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
|            |                                                                        |                                                                                                                                                                                                                                                                                                                                                                                             | 200≤V≤500                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 1 times of UR                                      | 60 sec.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
| >500       | 500Vdc                                                                 | 60 sec.                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
| Dielectric | Requirements                                                           |                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
| Class I    | ≥10GΩ or RxC≥500Ω-F, whichever is smaller                              |                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
| Class II   | ≥10GΩ or RxC≥100Ω-F, whichever is smaller                              |                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
| 6.         | Solderability                                                          | * Solder temperature : 235±5°C for (0402~1210).<br>* Solder temperature : 245±5°C for (1808~2225).<br>* Dipping time : 2±0.5 sec.                                                                                                                                                                                                                                                           | * 75% min. coverage of all metalized area.                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
| 7.         | Dielectric Strength<br>(Voltage proof)                                 | <table><tr><th>Rated Vol.(V)</th><th>Condition</th></tr><tr><td>≤100</td><td>2.5 times of UR</td></tr><tr><td>100&lt;V≤250</td><td>2.0 times of UR</td></tr><tr><td>250&lt;V≤500</td><td>1.5 times of UR</td></tr><tr><td>=630</td><td>1.2 times of UR</td></tr></table><br>* Duration : 1 to 5 sec.<br>* Charge and discharge current less than 50mA.                                      | Rated Vol.(V)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Condition                                          | ≤100                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 2.5 times of UR   | 100<V≤250                  | 2.0 times of UR   | 250<V≤500                                                                                                                                               | 1.5 times of UR            | =630               | 1.2 times of UR | * No evidence of damage or flashover during test. |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
|            |                                                                        |                                                                                                                                                                                                                                                                                                                                                                                             | Rated Vol.(V)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Condition                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
|            |                                                                        |                                                                                                                                                                                                                                                                                                                                                                                             | ≤100                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 2.5 times of UR                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
|            |                                                                        |                                                                                                                                                                                                                                                                                                                                                                                             | 100<V≤250                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 2.0 times of UR                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
| 250<V≤500  | 1.5 times of UR                                                        |                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
| =630       | 1.2 times of UR                                                        |                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
| 8.         | Resistance to Soldering Heat                                           | * Solder temperature : 260±5°C.<br>* Dipping time : 10±1 sec.<br>* Preheating : 120 to 150°C for 1 minute before immerse the capacitor in a eutectic solder.<br>* Before initial measurement (Class II only) : Perform 150 +0/-10°C for 1 hr and then set for 48±4 hrs at room temp.<br>* Measurement to be made after keeping at room temp. for 24±2 hrs (Class I) or 48±4 hrs (Class II). | * No remarkable damage.<br>* Cap. Change :<br>C0G : Within ±2.5% or ±0.25pF, whichever is larger.<br>X7R : Within ±7.5%.<br>* Q/D.F. & I.R. : To meet the initial requirement.<br>* 25% max. leaching on each edge.                                                                                                                                                                                                                                                                                          |                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
|            |                                                                        |                                                                                                                                                                                                                                                                                                                                                                                             | 9.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Temperature Cycle<br>(Rapid change of temperature) | * Conduct the five cycles according to the temperatures and time.<br><table><tr><th>Step</th><th>Temp.(°C)</th><th>Time(min.)</th></tr><tr><td>1</td><td>Min. operating temp. +0/-3</td><td>30±3</td></tr><tr><td>2</td><td>Room temp.</td><td>2~3</td></tr><tr><td>3</td><td>Max. operating temp. +3/-0</td><td>30±3</td></tr><tr><td>4</td><td>Room temp.</td><td>2~3</td></tr></table><br>* Before initial measurement (Class II only) : Perform 150 +0/-10°C for 1 hr and then set for 48±4 hrs at room temp.<br>* Measurement to be made after keeping at room temp. for 24±2 hrs (Class I) or 48±4 hrs (Class II). | Step              | Temp.(°C)                  | Time(min.)        | 1                                                                                                                                                       | Min. operating temp. +0/-3 | 30±3               | 2               | Room temp.                                        | 2~3       | 3                                                                                                                                                                                                                       | Max. operating temp. +3/-0                | 30±3         | 4                                             | Room temp.                                | 2~3             | * No remarkable damage.<br>* Cap. change :<br>C0G : Within ±2.5% or ±0.25pF, whichever is larger.<br>X7R : Within ±7.5%.<br>* Q/D.F. :<br>C0G : To meet the initial requirement.<br>X7R, Y5V : D.F.≤150% of initial requirement.<br>* I.R. : To meet the initial requirement. |
|            |                                                                        |                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Step              | Temp.(°C)                  | Time(min.)        |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
|            |                                                                        |                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 1                 | Min. operating temp. +0/-3 | 30±3              |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
| 2          | Room temp.                                                             | 2~3                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
| 3          | Max. operating temp. +3/-0                                             | 30±3                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |
| 4          | Room temp.                                                             | 2~3                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                   |                            |                   |                                                                                                                                                         |                            |                    |                 |                                                   |           |                                                                                                                                                                                                                         |                                           |              |                                               |                                           |                 |                                                                                                                                                                                                                                                                               |

## 8. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

| No.           | Item                                    | Test Condition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Requirements                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |               |               |            |      |                 |           |                 |           |                 |      |                 |               |      |            |               |     |      |          |      |      |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|---------------|------------|------|-----------------|-----------|-----------------|-----------|-----------------|------|-----------------|---------------|------|------------|---------------|-----|------|----------|------|------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10.           | Humidity<br>(Damp Heat)<br>Steady State | <ul style="list-style-type: none"><li>* Test temp. : 40±2°C.</li><li>* Humidity : 90~95%RH.</li><li>* Test time : 500 +24/-0 hrs.</li><li>* Measurement to be made after keeping at room temp. for 24±2 hrs (Class I) or 48±4 hrs (Class II).</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <ul style="list-style-type: none"><li>* No remarkable damage.</li><li>* Cap. change :<br/>C0G : Within ±5.0% or ±0.5pF, whichever is larger.</li><li>X7R : Within ±12.5%.</li><li>* Q/D.F. :<br/>C0G : Cap.&gt;30pF, Q≥350; 10pF≤Cap.≤30pF, Q≥275+2.5C; Cap.&lt;10pF, Q≥200+10C.</li><li>X7R : D.F.≤200% of initial requirement.</li><li>* I.R. (Class I) : ≥10GΩ or RxC≥500Ω-F, whichever is smaller.</li><li>* I.R. (Class II) : ≥1GΩ or RxC≥10Ω-F, whichever is smaller.</li></ul> |               |               |            |      |                 |           |                 |           |                 |      |                 |               |      |            |               |     |      |          |      |      |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 11.           | Humidity<br>(Damp Heat)<br>Load         | <ul style="list-style-type: none"><li>* Test temp. : 40±2°C.</li><li>* Humidity : 90~95% RH.</li><li>* Test time : 500 +24/-0hrs.</li><li>* To apply voltage : Rated voltage (Max. 500Vdc).</li><li>* Measurement to be made after keeping at room temp. for 24±2 hrs (Class I) or 48±4 hrs (Class II).</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <ul style="list-style-type: none"><li>* No remarkable damage.</li><li>* Cap. change :<br/>C0G : Within ±7.5% or ±0.75pF, whichever is larger.</li><li>X7R : Within ±12.5%.</li><li>* Q/D.F. :<br/>C0G : Cap.≥30pF, Q≥200; Cap.&lt;30pF, Q≥100+10/3C.</li><li>X7R : D.F.≤200% of initial requirement.</li><li>* I.R. : ≥500MΩ or RxC≥25Ω-F, whichever is smaller.</li><li>X7R 100V : ≥500MΩ or RxC≥5Ω-F, whichever is smaller.</li></ul>                                               |               |               |            |      |                 |           |                 |           |                 |      |                 |               |      |            |               |     |      |          |      |      |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 12.           | High Temperature Load<br>(Endurance)    | <ul style="list-style-type: none"><li>* Test temp. :<br/>C0G, X7R : 125±3°C.</li></ul> <table><tr><th>Dielectric</th><th>Rated Vol.(V)</th><th>Apply Voltage</th></tr><tr><td rowspan="4">C0G<br/>X7R</td><td>≤100</td><td>2.0 times of UR</td></tr><tr><td>200≤V≤500</td><td>1.5 times of UR</td></tr><tr><td>400V~450V</td><td>1.2 times of UR</td></tr><tr><td>≥630</td><td>1.2 times of UR</td></tr></table> <ul style="list-style-type: none"><li>* Exception items :<table><tr><th>Rated Vol.(V)</th><th>Size</th><th>Cap. Range</th><th>Apply Voltage</th></tr><tr><td rowspan="2">100</td><td>0603</td><td>≥0.082μF</td><td rowspan="2">150%</td></tr><tr><td>0805</td><td>≥0.12μF</td></tr></table></li><li>* Test time : 1000 +24/-0 hrs.</li><li>* Measurement to be made after keeping at room temp. for 24±2 hrs (Class I) or 48±4 hrs (Class II).</li></ul> | Dielectric                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Rated Vol.(V) | Apply Voltage | C0G<br>X7R | ≤100 | 2.0 times of UR | 200≤V≤500 | 1.5 times of UR | 400V~450V | 1.2 times of UR | ≥630 | 1.2 times of UR | Rated Vol.(V) | Size | Cap. Range | Apply Voltage | 100 | 0603 | ≥0.082μF | 150% | 0805 | ≥0.12μF | <ul style="list-style-type: none"><li>* No remarkable damage.</li><li>* Cap. change :<br/>C0G : Within ±3.0% or ±0.3pF, whichever is larger.</li><li>X7R : Within ±12.5%.</li><li>* Q/D.F. :<br/>C0G : Cap.&gt;30pF, Q≥350; 10pF≤Cap.≤30pF, Q≥275+2.5C; Cap.&lt;10pF, Q≥200+10C.</li><li>X7R : D.F.≤200% of initial requirement.</li><li>* I.R. : ≥1GΩ or RxC≥50Ω-F, whichever is smaller.</li><li>X7R 100V : ≥1GΩ or RxC≥10Ω-F, whichever is smaller.</li></ul> |
| Dielectric    | Rated Vol.(V)                           | Apply Voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |               |            |      |                 |           |                 |           |                 |      |                 |               |      |            |               |     |      |          |      |      |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| C0G<br>X7R    | ≤100                                    | 2.0 times of UR                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |               |            |      |                 |           |                 |           |                 |      |                 |               |      |            |               |     |      |          |      |      |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|               | 200≤V≤500                               | 1.5 times of UR                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |               |            |      |                 |           |                 |           |                 |      |                 |               |      |            |               |     |      |          |      |      |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|               | 400V~450V                               | 1.2 times of UR                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |               |            |      |                 |           |                 |           |                 |      |                 |               |      |            |               |     |      |          |      |      |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|               | ≥630                                    | 1.2 times of UR                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |               |            |      |                 |           |                 |           |                 |      |                 |               |      |            |               |     |      |          |      |      |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Rated Vol.(V) | Size                                    | Cap. Range                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Apply Voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |               |               |            |      |                 |           |                 |           |                 |      |                 |               |      |            |               |     |      |          |      |      |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 100           | 0603                                    | ≥0.082μF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 150%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |               |               |            |      |                 |           |                 |           |                 |      |                 |               |      |            |               |     |      |          |      |      |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|               | 0805                                    | ≥0.12μF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |               |            |      |                 |           |                 |           |                 |      |                 |               |      |            |               |     |      |          |      |      |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

## 8. RELIABILITY TEST CONDITIONS AND REQUIREMENTS
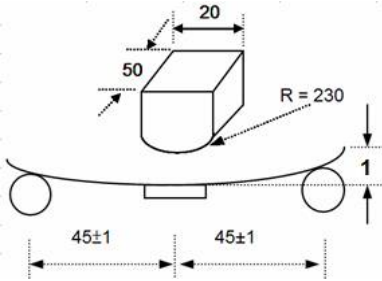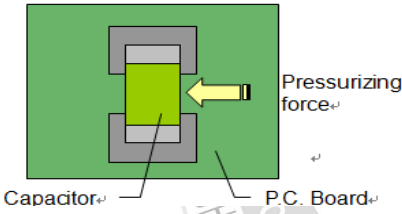
| No.            | Item                                                           | Test Condition                                                                                                                                                                                                                                                                                                                                                                              | Requirements                                                                                                                                                                                                                                                                                                                                                                                                                                         |            |             |               |                                                                |                |                     |
|----------------|----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------|---------------|----------------------------------------------------------------|----------------|---------------------|
| 13             | Resistance to Flexure of Substrate (Substrate bending test)    | <p>* The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1mm per second until the deflection becomes 1mm.</p>  <p>Unit : mm</p>                                                                                                                          | <p>* No remarkable damage.</p> <table><tr><th>Dielectric</th><th>Cap. Change</th></tr><tr><td>Class I (C0G)</td><td>Within <math>\pm 3.0\%</math> or <math>\pm 2.0\text{pF}</math>, whichever is larger</td></tr><tr><td>Class II (X7R)</td><td>Within <math>\pm 12.5\%</math></td></tr></table> <p>(This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test)</p> | Dielectric | Cap. Change | Class I (C0G) | Within $\pm 3.0\%$ or $\pm 2.0\text{pF}$ , whichever is larger | Class II (X7R) | Within $\pm 12.5\%$ |
| Dielectric     | Cap. Change                                                    |                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                      |            |             |               |                                                                |                |                     |
| Class I (C0G)  | Within $\pm 3.0\%$ or $\pm 2.0\text{pF}$ , whichever is larger |                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                      |            |             |               |                                                                |                |                     |
| Class II (X7R) | Within $\pm 12.5\%$                                            |                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                      |            |             |               |                                                                |                |                     |
| 14.            | Adhesive Strength of Termination (Robustness of termination)   | <p>* Capacitors mounted on a substrate. A force of 5N(<math>\leq 0603</math>) or 10N(<math>&gt;0603</math>) applied perpendicular to the place of substrate and parallel the line joining the center of terminations for <math>10\pm 1</math> second.</p>  <p>Capacitor P.C. Board Pressurizing force</p> | <p>* No remarkable damage or removal of the terminations.</p>                                                                                                                                                                                                                                                                                                                                                                                        |            |             |               |                                                                |                |                     |
| 15.            | Vibration Resistance                                           | <p>* Vibration frequency : 10~55 Hz/min.<br/>* Total amplitude : 1.5mm.<br/>* Test time : 6 hrs. (Two hrs each in three mutually perpendicular directions)<br/>* Measurement to be made after keeping at room temp. for <math>24\pm 2</math> hrs (Class I) or <math>48\pm 4</math> hrs (Class II).</p>                                                                                      | <p>* No remarkable damage.<br/>* Cap. change and Q/D.F. : To meet the initial spec.</p>                                                                                                                                                                                                                                                                                                                                                              |            |             |               |                                                                |                |                     |

## 9. PACKAGE DIMENSION AND QUANTITY

| Size       | Thickness (mm)   | Paper tape |          | Plastic tape |          |
|------------|------------------|------------|----------|--------------|----------|
|            |                  | 7" reel    | 13" reel | 7" reel      | 13" reel |
| 0402(1005) | 0.50±0.05        | 10k        | 50k      | -            | -        |
|            | 0.50 +0.02/-0.05 | 10k        | 50k      | -            | -        |
|            | 0.50±0.20        | 10k        | -        | -            | -        |
| 0603(1608) | 0.50±0.10        | 4k         | -        | -            | -        |
|            | 0.80±0.07        | 4k         | 15k      | -            | -        |
|            | 0.80 +0.15/-0.10 | 4k         | 15k      | -            | -        |
| 0805(2012) | 0.50±0.10        | 4k         | 15k      | -            | -        |
|            | 0.60±0.10        | 4k         | 15k      | -            | -        |
|            | 0.80±0.10        | 4k         | 15k      | -            | -        |
|            | 0.85±0.10        | 4k         | 15k      | -            | -        |
|            | 1.25±0.10        | -          | -        | 3k           | 10k      |
|            | 1.25±0.20        | -          | -        | 3k           | 10k      |
| 1206(3216) | 0.80±0.10        | 4k         | 15k      | -            | -        |
|            | 0.85±0.10        | 4k         | 15k      | -            | -        |
|            | 0.95±0.10        | -          | -        | 3k           | 10k      |
|            | 1.15±0.15        | -          | -        | 3k           | 10k      |
|            | 1.25±0.10        | -          | -        | 3k           | 10k      |
|            | 1.60±0.20        | -          | -        | 2k           | 10k      |
| 1210(3225) | 1.60 +0.30/-0.10 | -          | -        | 2k           | 9k       |
|            | 0.85±0.10        | -          | -        | 3k           | 10k      |
|            | 0.95±0.10        | -          | -        | 3k           | 10k      |
|            | 1.25±0.10        | -          | -        | 3k           | 10k      |
|            | 1.60±0.20        | -          | -        | 2k           | -        |
|            | 2.00±0.20        | -          | -        | 1k           | 6k       |
| 1808(4520) | 2.50±0.30        | -          | -        | 1k           | 6k       |
|            | 1.25±0.10        | -          | -        | 2k           | 10k      |
|            | 1.60±0.20        | -          | -        | 2k           | 8k       |
|            | 2.00±0.20        | -          | -        | 1k           | 6k       |
| 1812(4532) | 1.25±0.10        | -          | -        | 1k           | 5k       |
|            | 1.60±0.20        | -          | -        | 1k           | -        |
|            | 2.00±0.20        | -          | -        | 1k           | -        |
|            | 2.50±0.30        | -          | -        | 0.5k         | 3k       |
|            | 2.80±0.30        | -          | -        | 0.5k         | -        |
| 1825(4563) | 1.60±0.20        | -          | -        | 1k           | -        |
|            | 2.00±0.20        | -          | -        | 1k           | -        |
|            | 2.50±0.30        | -          | -        | 0.5k         | -        |
|            | 2.80±0.30        | -          | -        | 0.5k         | -        |
| 2220(5750) | 1.60±0.20        | -          | -        | 1k           | -        |
|            | 2.00±0.20        | -          | -        | 1k           | -        |
|            | 2.50±0.30        | -          | -        | 0.5k         | -        |
|            | 2.80±0.30        | -          | -        | 0.5k         | -        |
| 2225(5763) | 1.60±0.20        | -          | -        | 1k           | -        |
|            | 2.00±0.20        | -          | -        | 1k           | -        |
|            | 2.50±0.30        | -          | -        | 0.5k         | -        |
|            | 2.80±0.30        | -          | -        | 0.5k         | -        |

Unit : pcs

## 9. PACKAGE DIMENSION AND QUANTITY

## 9.1. EMBOSSED TAPE DIMENSIONS

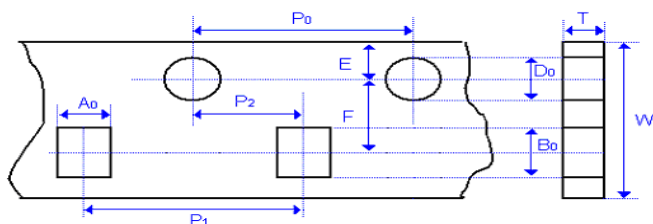


Fig. 9.1 The dimension of paper tape

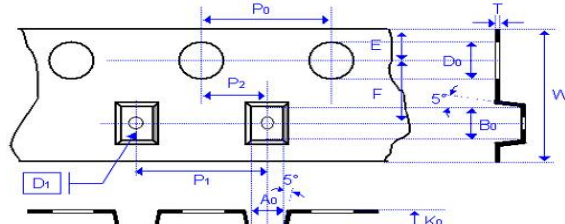


Fig. 9.2 The dimension of plastic tape

| Size              | 0402                   | 0603                         | 0805          |                        |
|-------------------|------------------------|------------------------------|---------------|------------------------|
| Chip Thickness    | 0.50±0.05<br>0.50±0.10 | 0.80±0.07<br>0.80 +0.15/-0.1 | 0.80±0.10     | 1.25±0.10<br>1.25±0.20 |
| A <sub>0</sub>    | 0.70±0.20              | 1.00 +0.05/-0.10             | 1.50±0.20     | <1.80                  |
| B <sub>0</sub>    | 1.20±0.20              | 1.80±0.10                    | 2.30±0.20     | <2.70                  |
| T                 | ≤0.80                  | 0.95±0.05                    | 0.95±0.05     | 0.23±0.05              |
| K <sub>0</sub>    | -                      | -                            | -             | <2.50                  |
| W                 | 8.00±0.10              | 8.00±0.10                    | 8.00±0.10     | 8.00±0.10              |
| P <sub>0</sub>    | 4.00±0.10              | 4.00±0.10                    | 4.00±0.10     | 4.00±0.10              |
| 10xP <sub>0</sub> | 40.00±0.10             | 40.00±0.20                   | 40.00±0.20    | 40.00±0.20             |
| P <sub>1</sub>    | 2.00±0.05              | 4.00±0.10                    | 4.00±0.10     | 4.00±0.10              |
| P <sub>2</sub>    | 2.00±0.05              | 2.00±0.05                    | 2.00±0.05     | 2.00±0.05              |
| D <sub>0</sub>    | 1.50 +0.10/-0          | 1.50 +0.10/-0                | 1.50 +0.10/-0 | 1.50 +0.10/-0          |
| D <sub>1</sub>    | -                      | -                            | -             | 1.00±0.10              |
| E                 | 1.75±0.05              | 1.75±0.05                    | 1.75±0.05     | 1.75±0.10              |
| F                 | 3.50±0.05              | 3.50±0.05                    | 3.50±0.05     | 3.50±0.05              |
| Unit :            | mm                     | mm                           | mm            | mm                     |

| Size              | 1206          |                        |                            | 1210                                |               | 1808                   |               |
|-------------------|---------------|------------------------|----------------------------|-------------------------------------|---------------|------------------------|---------------|
| Chip Thickness    | 0.80±0.10     | 0.95±0.10<br>1.25±0.10 | 1.60±0.20<br>1.60+0.3/-0.1 | 0.95±0.10<br>1.25±0.10<br>1.60±0.20 | 2.50±0.30     | 1.25±0.10<br>1.60±0.20 | 2.00±0.20     |
| A <sub>0</sub>    | 2.00±0.10     | <2.00                  | <2.50                      | <3.05                               | <3.20         | <2.50                  | <2.50         |
| B <sub>0</sub>    | 3.50±0.50     | <3.70                  | <4.00                      | <3.80                               | <4.00         | <5.30                  | <5.30         |
| T                 | 0.95±0.05     | 0.23±0.05              | 0.23±0.05                  | 0.23±0.05                           | 0.23±0.05     | 0.25±0.05              | 0.25±0.05     |
| K <sub>0</sub>    | -             | <2.50                  | <2.50                      | <2.50                               | <3.50         | <2.50                  | <2.50         |
| W                 | 8.00±0.10     | 8.00±0.10              | 8.00±0.10                  | 8.00±0.10                           | 8.00±0.10     | 12.00±0.20             | 12.00±0.20    |
| P <sub>0</sub>    | 4.00±0.10     | 4.00±0.10              | 4.00±0.10                  | 4.00±0.10                           | 4.00±0.10     | 4.00±0.10              | 4.00±0.10     |
| 10xP <sub>0</sub> | 40.00±0.20    | 40.00±0.20             | 40.00±0.20                 | 40.00±0.20                          | 40.00±0.20    | 40.00±0.20             | 40.00±0.20    |
| P <sub>1</sub>    | 4.00±0.10     | 4.00±0.10              | 4.00±0.10                  | 4.00±0.10                           | 4.00±0.10     | 4.00±0.10              | 4.00±0.10     |
| P <sub>2</sub>    | 2.00±0.05     | 2.00±0.05              | 2.00±0.05                  | 2.00±0.05                           | 2.00±0.05     | 2.00±0.05              | 2.00±0.05     |
| D <sub>0</sub>    | 1.50 +0.10/-0 | 1.50 +0.10/-0          | 1.50 +0.10/-0              | 1.50 +0.10/-0                       | 1.50 +0.10/-0 | 1.50 +0.10/-0          | 1.50 +0.10/-0 |
| D <sub>1</sub>    | -             | 1.00±0.10              | 1.50±0.10                  | 1.50±0.10                           | 1.00±0.10     | 1.50±0.10              | 1.50±0.10     |
| E                 | 1.75±0.10     | 1.75±0.10              | 1.75±0.10                  | 1.75±0.10                           | 1.75±0.10     | 1.75±0.10              | 1.75±0.10     |
| F                 | 3.50±0.05     | 3.50±0.05              | 5.50±0.05                  | 5.50±0.05                           | 3.50±0.05     | 5.50±0.05              | 5.50±0.05     |
| Unit :            | mm            | mm                     | mm                         | mm                                  | mm            | mm                     | mm            |

## 9. PACKAGE DIMENSION AND QUANTITY

| Size              | 1812                                |                        | 1825                   |                        | 2220                                |                        |
|-------------------|-------------------------------------|------------------------|------------------------|------------------------|-------------------------------------|------------------------|
| Chip Thickness    | 1.25±0.10<br>1.60±0.20<br>2.00±0.20 | 2.50±0.30<br>2.80±0.30 | 1.60±0.20<br>2.00±0.20 | 2.50±0.30<br>2.80±0.30 | 1.40±0.15<br>1.60±0.20<br>2.00±0.20 | 2.50±0.30<br>2.80±0.30 |
| A <sub>0</sub>    | <3.90                               | <3.90                  | <6.80                  | <6.80                  | <5.80                               | <6.80                  |
| B <sub>0</sub>    | <5.30                               | <5.30                  | <5.30                  | <5.30                  | <6.50                               | <6.50                  |
| T                 | 0.25±0.05                           | 0.25±0.05              | 0.30±0.10              | 0.30±0.10              | 0.30±0.10                           | 0.30±0.10              |
| K <sub>0</sub>    | <2.50                               | <3.00                  | <2.50                  | <3.10                  | <2.50                               | <3.10                  |
| W                 | 12.00±0.20                          | 12.00±0.20             | 12.00±0.20             | 12.00±0.20             | 12.00±0.20                          | 12.00±0.20             |
| P <sub>0</sub>    | 4.00±0.10                           | 4.00±0.10              | 4.00±0.10              | 4.00±0.10              | 4.00±0.10                           | 4.00±0.10              |
| 10xP <sub>0</sub> | 40.00±0.20                          | 40.00±0.20             | 40.00±0.20             | 40.00±0.20             | 40.00±0.20                          | 40.00±0.20             |
| P <sub>1</sub>    | 8.00±0.10                           | 8.00±0.10              | 8.00±0.10              | 8.00±0.10              | 8.00±0.10                           | 8.00±0.10              |
| P <sub>2</sub>    | 2.00±0.05                           | 2.00±0.05              | 2.00±0.05              | 2.00±0.05              | 2.00±0.05                           | 2.00±0.05              |
| D <sub>0</sub>    | 1.50 +0.10/-0                       | 1.50 +0.10/-0          | 1.50 +0.10/-0          | 1.50 +0.10/-0          | 1.50 +0.10/-0                       | 1.50 +0.10/-0          |
| D <sub>1</sub>    | 1.50±0.10                           | 1.50±0.10              | 1.50±0.10              | 1.50±0.10              | 1.50±0.10                           | 1.50±0.10              |
| E                 | 1.75±0.10                           | 1.75±0.10              | 1.75±0.10              | 1.75±0.10              | 1.75±0.10                           | 1.75±0.10              |
| F                 | 5.50±0.05                           | 5.50±0.05              | 5.50±0.05              | 5.50±0.05              | 5.50±0.05                           | 5.50±0.05              |
| Unit :            | mm                                  | mm                     | mm                     | mm                     | mm                                  | mm                     |

| Size              | 2225                   |                        |
|-------------------|------------------------|------------------------|
| Chip Thickness    | 1.60±0.20<br>2.00±0.20 | 2.50±0.30<br>2.80±0.30 |
| A <sub>0</sub>    | <6.80                  | <6.80                  |
| B <sub>0</sub>    | <6.50                  | <6.50                  |
| T                 | 0.30±0.10              | 0.30±0.10              |
| K <sub>0</sub>    | <2.50                  | <3.10                  |
| W                 | 12.00±0.20             | 12.00±0.20             |
| P <sub>0</sub>    | 4.00±0.10              | 4.00±0.10              |
| 10xP <sub>0</sub> | 40.00±0.20             | 40.00±0.20             |
| P <sub>1</sub>    | 8.00±0.10              | 8.00±0.10              |
| P <sub>2</sub>    | 2.00±0.05              | 2.00±0.05              |
| D <sub>0</sub>    | 1.50 +0.10/-0          | 1.50 +0.10/-0          |
| D <sub>1</sub>    | 1.50±0.10              | 1.50±0.10              |
| E                 | 1.75±0.10              | 1.75±0.10              |
| F                 | 5.50±0.05              | 5.50±0.05              |
| Unit :            | mm                     | mm                     |

**9. PACKAGE DIMENSION AND QUANTITY****9.2. REEL DIMENSIONS**

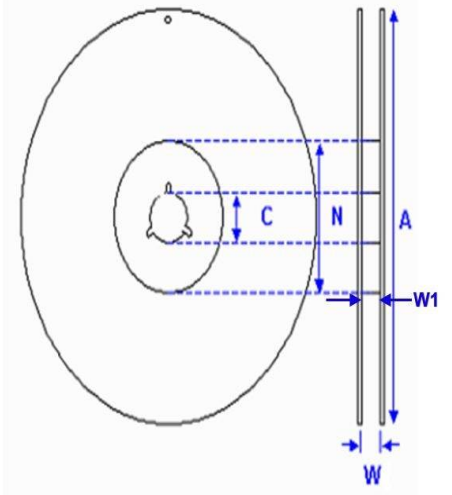
| Size           | 0201, 0402, 0603,<br>0805, 1206, 1210 |                   | 1808, 1812, 1825,<br>2220, 2225                         |  |
|----------------|---------------------------------------|-------------------|---------------------------------------------------------|-------------------------------------------------------------------------------------|
| Reel size      | 7"                                    | 13"               | 7"                                                      |                                                                                     |
| C              | 13.0<br>+0.5/-0.2                     | 13.0<br>+0.7/-0.3 | 13.0<br>+0.5/-0.2                                       |                                                                                     |
| W <sub>1</sub> | 8.4+1.5                               | 8.4+1.5           | 12.4<br>+2.0/-0                                         |                                                                                     |
| W              | 14.4max                               | 14.4max           | shall accommodate<br>tape width without<br>interference |                                                                                     |
| A              | 178.0<br>±0.10                        | 330.0<br>±1.0     | 178.0<br>±0.10                                          |                                                                                     |
| N              | 60.0<br>+1.0/-0                       | 100<br>±1.0       | 60.0<br>+1.0/-0                                         |                                                                                     |

Fig. 9.3 The dimension of reel

## 10. APPLICATION NOTES

### STORAGE

To prevent the damage of solderability of terminations, the following storage conditions are recommended :

Indoors under 5 ~ 40°C and 20% ~ 70% RH.

No harmful gases containing sulfuric acid, ammonia, hydrogen sulfide or chlorine.

Packaging should not be opened until the capacitors are required for use. If opened, the pack should be re-sealed as soon as is practicable. Taped product should be stored out of direct sunlight, which might promote deterioration in tape or adhesion performance. The product is recommended to be used within 12 months after shipment and checked the solderability before use.

### HANDLING

Chip capacitors are dense, hard, brittle, and abrasive materials. They are liable to suffer mechanical damage, in the form of cracks or chips. Chip Capacitors should be handled with care to avoid contamination or damage. To use vacuum or plastic tweezers to pick up or plastic tweezers is recommended for manual placement. Tape and reeled packages are suitable for automatic pick and placement machine.


### PREHEAT

In order to minimize the risk of thermal shock during soldering, a carefully controlled preheat is required. The rate of preheat should not exceed 3°C per second.

### SOLDERING

Use mildly activated rosin fluxes do not use activated flux. The amount of solder in each solder joint should be controlled to prevent the damage of chip capacitors caused by the stress between solder, chips, and substrate.

a.) Hand soldering :

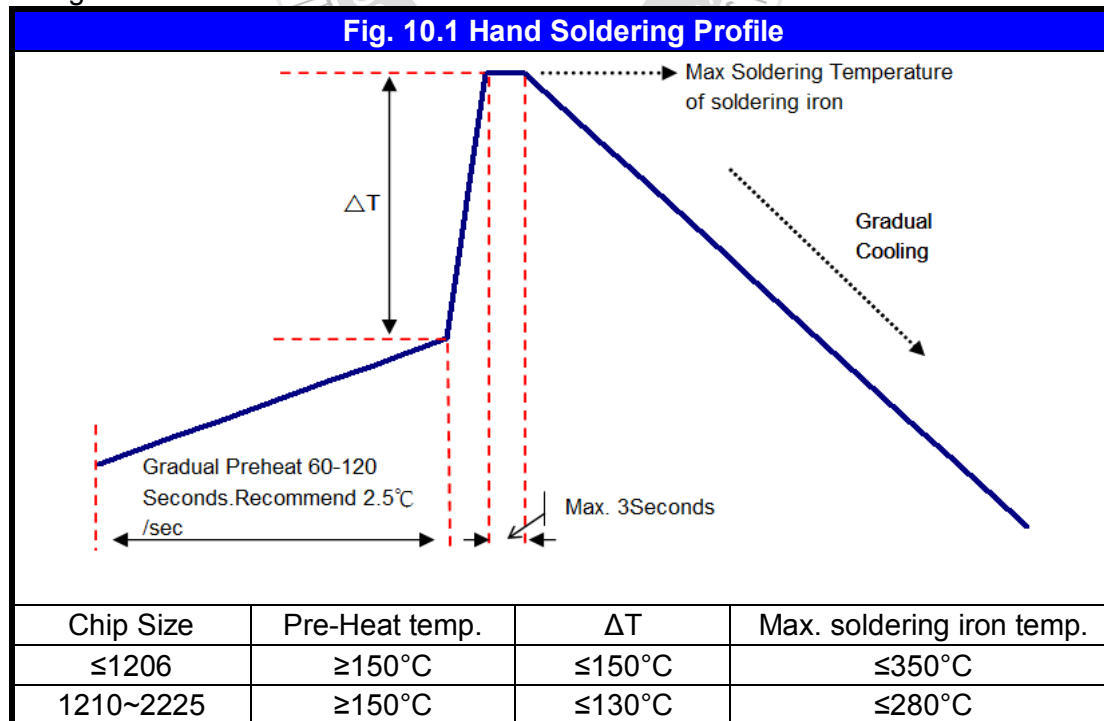

\* Soldering iron tip diameter  $\leq 1.0$  mm and wattage max. 20W.

\* The Capacitors shall be pre-heated and that the temperature gradient between the devices and the tip of the soldering iron.

\* The required amount of solder shall be melted on the soldering tip.


\* The tip of iron should not contact the ceramic body directly.

\* The Capacitors shall be cooled gradually at room temperature after soldering.


\* Forced air cooling is not allowed.

## 10. APPLICATION NOTES

b.) Reflow soldering :

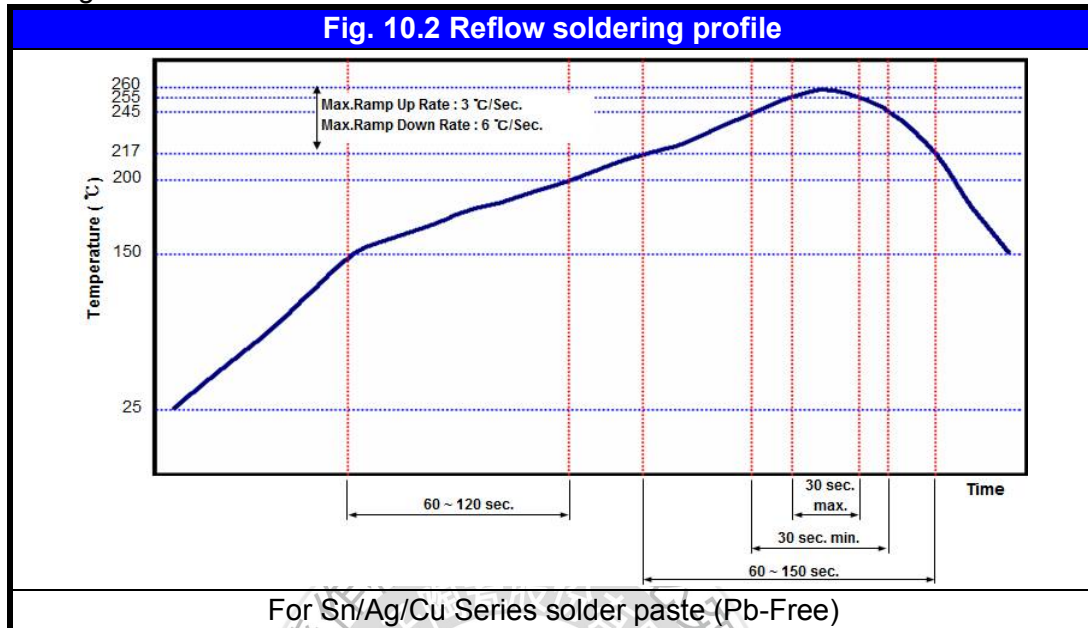

c.) Wave soldering :

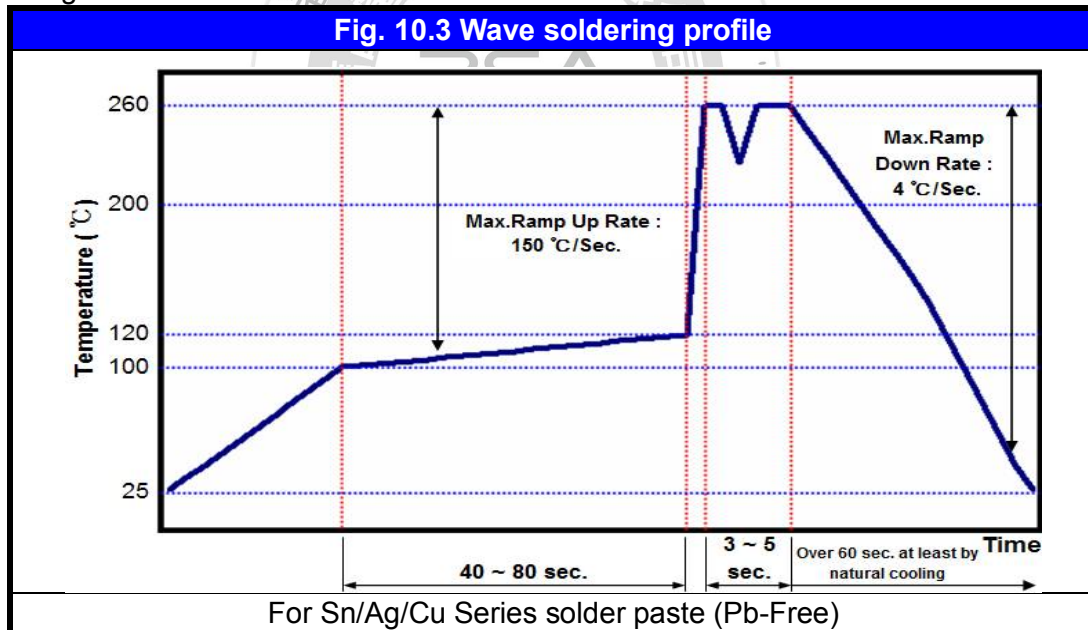

Soldering conditions :

Class I :

| Size Inch (mm)   | Temper. Cher. | Capacitance       | Condition |        |
|------------------|---------------|-------------------|-----------|--------|
|                  |               |                   | Wave      | Reflow |
| ≤0402 (1005)     | Class I       | All               | X         | O      |
| 0603 (1608)      | Class I       | All               | O         | O      |
| 0805 (2012)      | Class I       | All               | O         | O      |
| 1206 (3216)      | Class I       | All               | O         | O      |
|                  |               | Thickness >0.95mm | X         | O      |
| ≥1210 (3225)     | Class I       | All               | X         | O      |
| Coating Products | All           | All               | X         | O      |

**10. APPLICATION NOTES**

Soldering conditions :

Class II :

| Size Inch (mm)   | Temper. Cher. | Capacitance        | Condition |        |
|------------------|---------------|--------------------|-----------|--------|
|                  |               |                    | Wave      | Reflow |
| ≤0402 (1005)     | Class II      | All                | X         | O      |
| 0603 (1608)      | Class II      | Cap. <2.2μF        | O         | O      |
|                  |               | Cap. ≥2.2μF        | X         | O      |
| 0805 (2012)      | Class II      | Thickness ≤ 0.95mm | O         | O      |
|                  |               | Thickness > 0.95mm | X         | O      |
| 1206 (3216)      | Class II      | Thickness ≤ 0.95mm | O         | O      |
|                  |               | Thickness > 0.95mm | X         | O      |
| ≥1210 (3225)     | Class II      | All                | X         | O      |
| Coating Products | All           | All                | X         | O      |

Soldering height :

The solder climbing minimum height is suggesting to 25% of chip thickness or 500um whichever is less.  
(Reference from IPC-610E)

**COOLING**

After soldering, cool the chips and the substrate gradually to room temperature. Natural cooling in air is recommended to minimize stress in the solder joint.

**CLEANING**

All flux residues must be removed by using suitable electronic-grade vapor-cleaning solvents to eliminate contamination that could cause electrolytic surface corrosion. Good results can be obtained by using ultrasonic cleaning of the solvent. The choice of the proper system is depends upon many factors such as component mix, flux, and solder paste and assembly method. The ability of the cleaning system to remove flux residues and contamination from under the chips is very important.