
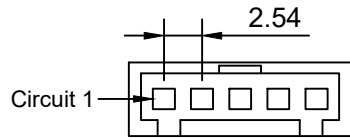


1.FIGURE AND DIMENSIONS(视图及尺寸)

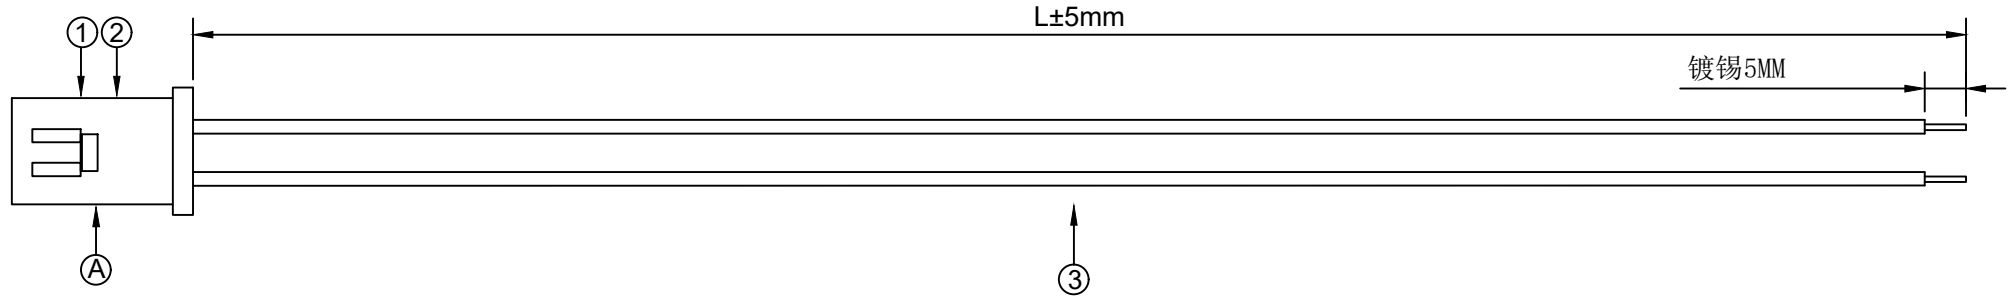

端面

X2530H-XX-N0

2. CIRCUIT DIAGRAM(接线图)

| A | 颜色 | B |
|---|----|---|
| 1 | 红色 | |
| 2 | 黑色 | |

3. MATERIAL(材料)

| 标志 | 料号 | 单用量 | 备注 | 总用量 |
|----|------------------------|-------|-------|-----|
| 1 | X2530H-02-PT | 1PCS | | |
| 2 | X2530TF-PSN | 2PCS | | |
| 3 | UL1007/22AWG. 红, 黑色 | 各1PCS | 150MM | |
| 总量 | | | | |

XXXXXT-XXXX-XXX-AXXXX-LXXX-XXXXXT-X

① ② ③ ④ ⑤ ⑥ ⑦

- ① 系列 (Series No)
- ② Pin位 (Pin bit)
- ③ 材质 (Material) :P-PSN(磷铜先冲后镀锡)
- ④ 线规线色 (Wire gauge line color) A: (AWG20-AWG24)
Circuit:R(red)/B (black) /Y (yellow) /G (green) /
L (blue) /P (purple) /YR (orange) /W (white) /E(grey)/N (brown)
- ⑤ 线长 (Line length) L: (可定制长度)
- ⑥ 系列 (Series No)
- ⑦ 正反接或镀锡 (Front and reverse or tin-plated) Z(反接)/F (正接) TX (镀锡Xmm)

| | | | | | | | | | | | | | |
|------|--|--|--|--|---|-------------|------------|---------------------------------------|-----------------------------|----------|--------|----------|--|
| | | | | | DSND | | SCALE: N/A | DRAWING NO. | | | | | |
| | | | | | ANGLAR | ±5° | DWN | VIEW: | X2530T-02-PSN-A22RB-L150-T5 | | | | |
| | | | | | Δx | L ≤ 4 | ±0.2 | PART NO.: | | | | | |
| | | | | | Δx | 4 < L ≤ 16 | ±0.3 | CHKD | UNIT: mm/in | DWG NO.: | | | |
| | | | | | Δx | 16 < L ≤ 63 | ±0.4 | APPD | SIZE: A4 | | | | |
| MARK | | | | | DESCRIPTION | DATE | REVISED | APPROVED | L > 63 | ±0.5 | | | |
| | | | | | REVISIONS | | | UNSPECIFIED TOLERANCES | | | WEIGHT | | |
| | | | | | www.helloxkb.com www.helloxkb.cn www.xk-dg.cn | | | XKB INDUSTRIAL PRECISION CO., LIMITED | | | SHEET | REVISION | |
| | | | | | | | | | | | 1/1 | A0 | |