

Specifications

Ordering Information

F263-12 03 A0 B SY C 2

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 青铜, 镍底30u"MIN, 表面镀普金

Contact: bronze, GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage: AC 500V/Minute.

温度范围: -40° C to +105° C

Temperature Range: -40° C to +105° C

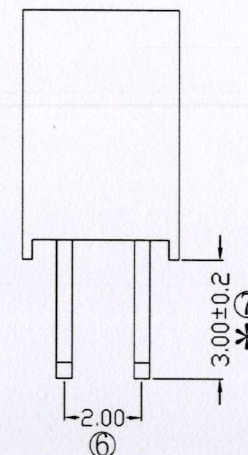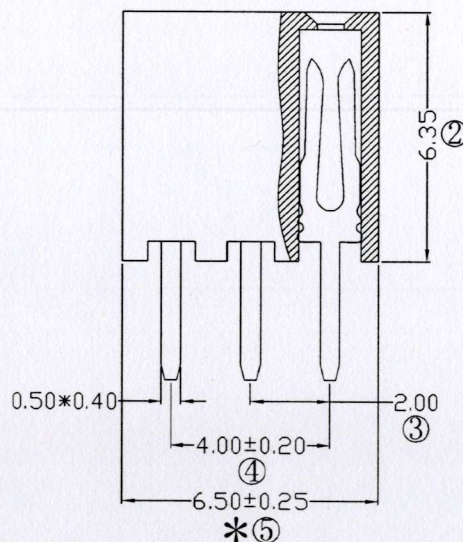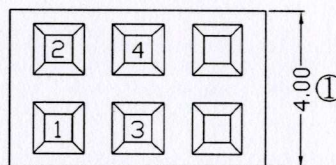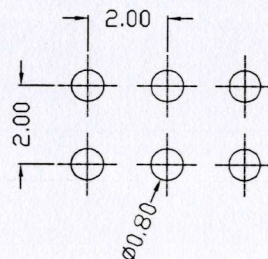

NO. OF PINS
PER ROW
2~40P

Contact Plating

Full Of Gold

A0=0.8u"

A1=1u"

A2=1.5u"

A3=2u"

A4=3u"

A5=5u"

A6=10u"

A7=15u"

A8=20u"

A9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

INSULATOR

MATERIAL:

A: PBT

B: PA6T

C: PA9T

D: LCP

E: LCP

E: LCP

E: LCP

E: LCP

E: LCP

E: LCP

E: LCP

E: LCP

E: LCP

PACKING

A: PE Bag

B: Tape & Reel

C: Tube

D: Tube+CAP

E: Tray

RoHS
COMPLIANT

客编: K1031

注意
事项

1. 带*为品质重点检验尺寸



			OPERATION		SCALE		Fit		Yxcon 东莞市宇熙精密连接器有限公司		
			X.X	±0.25	UNIT		MM		www.yxcon.com Dongguan Yuxi Electronic Co., Ltd.		
			X.XX	±0.20	SIZE	A4	DESIGN	刘伟 2021.08.05	PART NO.	F263-1203A0BSYC2	
			X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.0排母6.35mm型高 2*3P 180度 DIP: 3.0mm 波浪型 Y型 型宽=4.0 PA6T料 镀普金	
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION		DIM	TOL	PROJ.	APPROVE	Customer No.		