

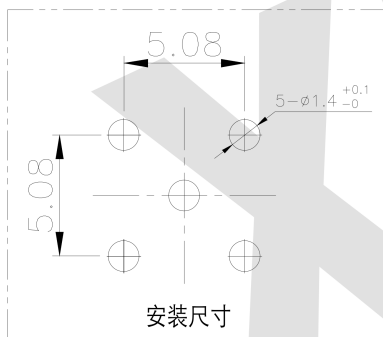


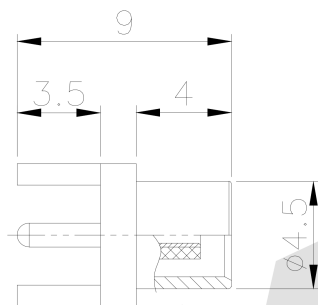

材质要求:

- 1.频率: 0~3GHz
- 2.阻抗: 50Ω
- 3.VSWR: ≤ 1.2
- 4.工作电压: 335V
- 5.耐压: 750V
- 6.绝缘电阻: $\geq 1000M\Omega$
- 7.接触电阻: 内导体 $\leq 5m\Omega$; 外导体 $\leq 2.5m\Omega$
- 8.环境温度: $-40\sim+125^{\circ}C$ (PE CABLE-40 $\sim$ +85 $^{\circ}C$)
- 9.机械寿命: 500 次
- 10.材料:
 - 外壳: 黄铜 镀金
 - 插针: 黄铜 镀金
 - 绝缘子: PTFE
- 11.未注公差按 ± 0.2

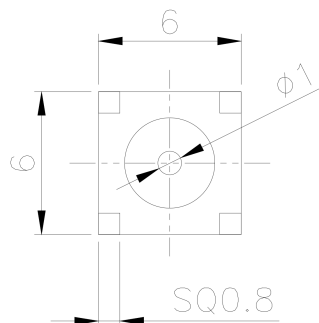

Ordering Information

XD - *** - *** - *H - D 00* - 01

Series
DIA 1.0mm
DIA 1.2mm
DIA 1.5mm
DIA 2.0mm

Type
Type A
Type B
Type C
Type D

Height
(mm)
1.0mm
1.2mm
1.5mm
2.0mm

Pin Pitch
(mm)
0.5mm
0.8mm
1.0mm
1.2mm

Product No.
01



GENERAL TOLERANCE

制图

01

DIM TOL

审核

X.X ± 0.30

检查

X.XX ± 0.20

批准

X.XXX ± 0.10

比例

Angle $\pm 3.0^{\circ}$

投影



深圳讯答科技有限公司

Shenzhen XunDa Technology Co., Ltd

产品名称

MCX 直式 插孔 带脚

版本

REV.

A

产品料号

XD-MCX-KE-9H-D011-01

单位

UNITS

mm

材料

MATERIAL

页次

SHEET

1/1