

CJC4334H

Stereo DAC with 24-Bit, 192 kHz Stereo D/A Converter

Preliminary

EDITION	AUTHOR	DATE	DESCRIPTION
V1.0	By CHH	2024.6	The First Draft

Contents

1. Description	3
2. Features	3
3. Applications	3
4. Block diagram	4
5. Pin description	4
5.1 Pin description/function	5
6. Specifications	5
7. Absolute maximum ratings	5
8. Electrical characteristic	6
9. Filter characteristics	7
10. System clock timing	7
11. Audio interface timing	8
12. Audio interface format	8
13. System clocking	9
14. External serial clock mode	10
15. De-emphasis control	10
16. Power-down sequence	10
17. Absolute maximum ratings system design	11
18. Package information	12
19. Ordering Information	13

1. Description

The CJC4334H is a high quality stereo DAC designed for portable multimedia applications. The CJC4334H is a complete, stereo digital-to-analog output systems including interpolation, multi-bit D/A conversion and output analog filtering in a 8-pin package.

The CJC4334H support all major audio data interface formats, and the individual devices differ only in the supported interface format. The device including digital interpolation, third-order multi-bit delta-sigma digital-to-analog conversion, digital de-emphasis, analog filtering. the CJC4334H is available in a 8-pin SOP package in Commercial (-40°C to +85°C) grade.


2. Features

- DAC SNR 92dB ('A' weighted)
- THD -87dB
- Architecture
 - – Filtered Line-level Outputs
- Supports Sample Rates up to 192 kHz
- 24-Bit I²S Input
- Small 8-pin SOP8L(SOIC8) Package


3. Applications

- Handheld gaming
- Mobile multimedia
- DVD players
- Digital TVS

4. Block diagram

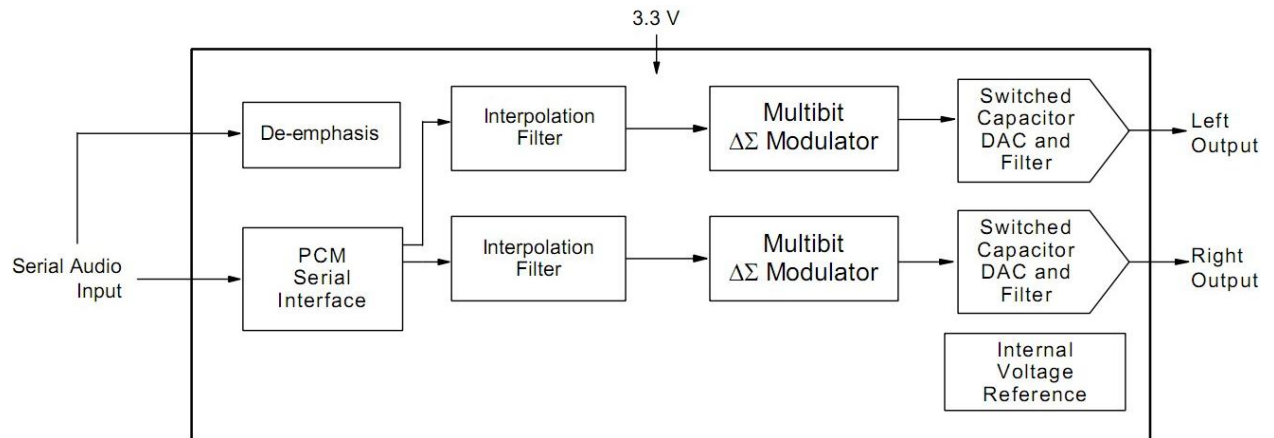

5. Pin description

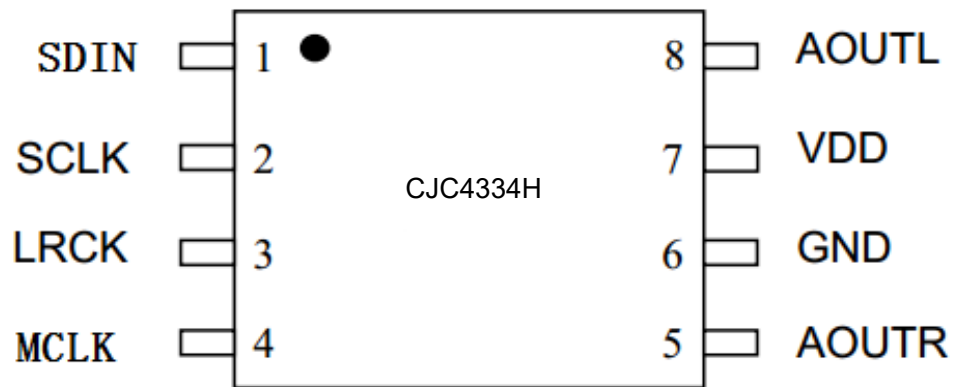

CJC4334H_SOP8

5.1 Pin description/function

PIN NO	NAME	I/O	DESCRIPTION
1	SDIN	I	Serial Audio Data Input - Input for two's complement serial audio data.
2	SCLK	I	Serial Clock - Serial clock for the serial audio interface.
3	LRCK	I	Left / Right Clock - Determines which channel, Left or Right, is currently active on the serial audio data line.
4	MCLK	I	Master Clock - Clock source for the delta-sigma modulator and digital filters.
5	AOUTL	O	Analog L Outputs - The full-scale analog line output level is specified in the Analog Characters.
6	GND	I	Ground - Ground reference.
7	VDD	O	Analog Power - Positive power supply for the analog and regulator for the digital core logic sections.
8	AOUTR	O	Analog R Outputs - The full-scale analog line output level is specified in the Analog Characters.

6. Specifications

GND = 0 V; all voltages with respect to ground.(Note1)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
DC power supply Analog power	VDD	3.0	3.3.	3.6	V
Ambient operating temperature (power applied) -CSZ	TA	-40	-	+85	°C

Note 1: Device functional operation is guaranteed within these limits. Functionality is not guaranteed or implied outside of these limits. Operation outside of these limits may adversely affect device reliability.

7. Absolute maximum ratings

GND = 0 V; all voltages with respect to ground.Normal operation is not guaranteed at these extremes.

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
DC power supply Low voltage analog power	VDD	-0.3	-	3.6	V
Input current, any pin except supplies	I _{in}	-	-	±10	mA
Digital input voltage (Note2) Digital interface	V _{IN-L}	-0.3	-	V _L +0.4	V

Note 2: The maximum over/under voltage is limited by the input current except on the power supply pin.

8. Electrical characteristic

Test Conditions

VDD =3.3V, GND=0V, TA=+25°C, fs=48kHz, MCLK=256fs, 24-bit data, unless otherwise stated.

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Analogue Output						
Output Level		0dBFS	2.7	2.8	2.9	V _{PP}
Master Clock Frequency	fCLK		2		50	MHz
Duty Cycle	dCLK		45		55	%
Input Sample Rate All MCLK/LRCK ratios combined		F _s	30		200	kHz
Load Impedance				3		KΩ
Load Capacitance				100		pF
DAC to Line-Out						
Signal to Noise Ratio	SNR	RL = 10kΩ A-weighted	87	91	92	dB
		RL = 10kΩ Un-weighted	85	89	90	dB
Total Harmonic Distortion Plus Noise	THD+N	RL = 10kΩ	83	85	87	dB
Channel Separation		1kHz	100	114	-	dB
Power Supply Rejection Ratio	PSRR	1kHz	-	44.2	-	dB
Digital Logic Levels						
Input HIGH Level	VIH		0.9V _D			V
Input LOW Level	VIL				0.3V _D	V
Output HIGH Level	VOH	IOH = 1mA	0.9V _D			V
Output LOW Level	VOL	IOL = -1mA			0.1V _D	V
Input Capacitance						pF
Input Leakage					+/-0.9	A

9. Filter characteristics

Ta=Tmin~Tmax;VDD=3.3V, fs=48kHz


PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS
DAC Digital Filter:					
Passband (Note3)	$\pm 0.01\text{dB}$ -6.0dB	PB	0 -	22.05 -	kHz kHz
Stopband (Note3)		SB	24.1		kHz
Passband Ripple		PR		± 0.01	dB
Stopband Attenuation		SA	65		dB
Group Delay (Note4)		GD	-	24.0	1/fs
Digital Filter + SCF + CTF:					
Frequency	0~20 kHz	FR	-	± 0.02	dB
Response	~40 kHz (Note5)		-	± 1.0	dB

Note 3. The passband and stopband frequencies is proportional to fs.

Note 4. The delay occurred by digital counter, this time is the time from setting the 16/24bit data of input register to analog signal outputting from both channels .

Note 5. fs=96kHz.

10. System clock timing

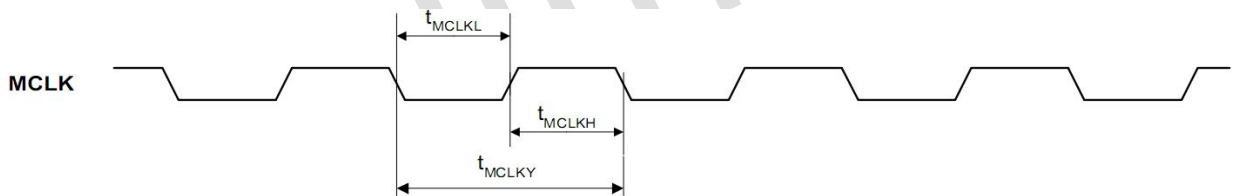


System Clock Timing Requirements

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
System Clock Timing Information					
MCLK System clock pulse width high	TMCLKL	21			ns
MCLK System clock pulse width low	TMCLKH	21			ns
MCLK System clock cycle time	TMCLKY	54			ns
MCLK duty cycle	TMCLKDS	60:40		40:60	ns

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
System Clock Timing Information					
MCLK System clock pulse width high	TMCLKL	10			ns
MCLK System clock pulse width low	TMCLKH	10			ns
MCLK System clock cycle time	TMCLKY	27			ns

11. Audio interface timing

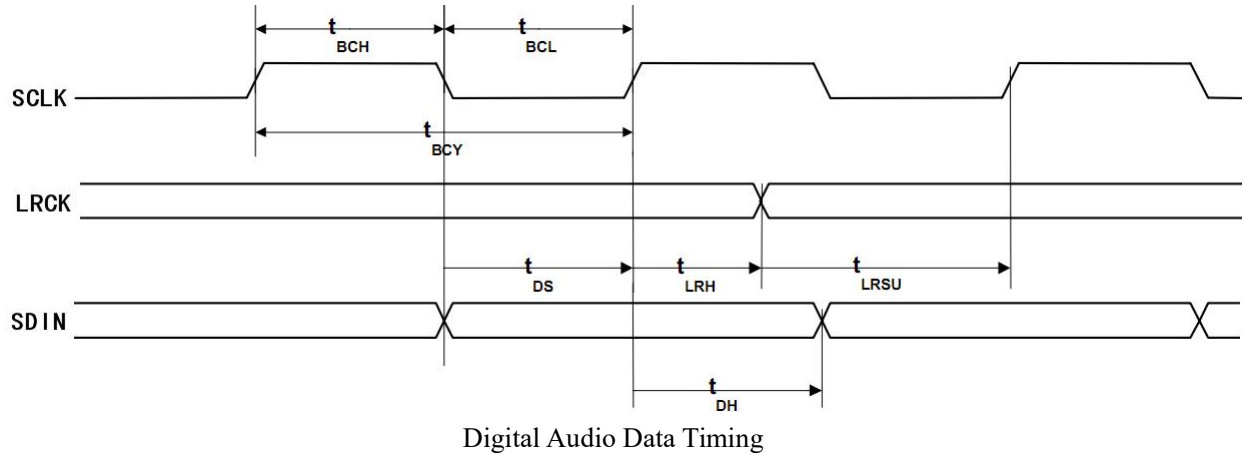


PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Audio Data Input Timing Information					
SCLK cycle time	tBCY	50			ns
SCLK pulse width high	tBCH	20			ns
SCLK pulse width low	tBCL	20			ns
LRCK set-up time to SCLK rising edge	tLRSU	10			ns
LRCK hold time from SCLK rising edge	tLRH	10			ns
SDIN hold time from SCLK rising edge	tDH	10			ns

Note: SCLK period should always be greater than or equal to MCLK period.

12. Audio interface format

In I2S mode, the MSB is available on the second rising edge of SCLK following a LRCLK transition. The other bits up to the LSB are then transmitted in order. Depending on word length, SCLK frequency and sample rate, there may be unused SCLK cycles between the LSB of one sample and the MSB of the next.

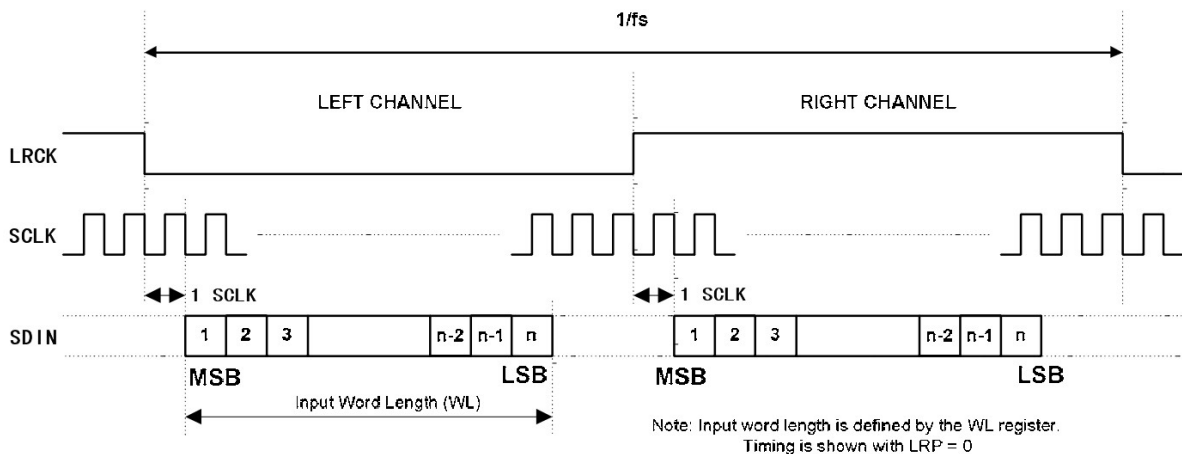

13. System clocking

The external clocks, which are required to operate the CJC4334H, are MCLK, BICK and LRCK. The master clock (MCLK) should be synchronized with LRCK, but the phase is not critical. The MCLK is used to operate the digital interpolation filter and the Delta-Sigma modulator.

The system clocking have two operate MODE, are AUTO detect MODE and I2C Setting MODE.

The MCLK frequency is detected from the relation between MCLK and LRCK automatically.

AUTO detect MODE

LRCK (kHz)	MCLK (MHz)									
	64x	96x	128x	192x	256x	384x	512x	768x	1024x	1152x
32	-	-	-	-	8.1920	12.2880	-	-	32.7680	36.8640
44.1	-	-	-	-	11.2896	16.9344	22.5792	33.8688	45.1580	-
48	-	-	-	-	12.2880	18.4320	24.5760	36.8640	49.1520	-
64	-	-	8.1920	12.2880	-	-	32.7680	49.1520	-	-
88.2	-	-	11.2896	16.9344	22.5792	33.8688	-	-	-	-
96	-	-	12.2880	18.4320	24.5760	36.8640	-	-	-	-
128	8.1920	12.2880	-	-	32.7680	49.1520	-	-	-	-
176.4	11.2896	16.9344	22.5792	33.8688	-	-	-	-	-	-
192	12.2880	18.4320	24.5760	36.8640	-	-	-	-	-	-

14. External serial clock mode

The CJC4334H will enter the External Serial Clock Mode when 16 low to high transitions are detected on the DEM/SCLK pin during any phase of the LRCK period. When this mode is enabled, the Internal Serial Clock Mode and de-emphasis filter are disabled.

In the External Serial Clock Mode, the CJC4334H will support I²S data up to 24-bit, with data valid on the rising edge of SCLK.

15. De-emphasis control

The device includes on-chip digital de-emphasis. The frequency response of the de-emphasis curve scales with changes in the sample rate, F_s . The de-emphasis error will increase for sample rates other than 44.1 kHz.

When the SCLK/DEM pin is connected to VL (internal SCLK mode), the 44.1 kHz de-emphasis filter is activated. When the SCLK/DEM pin is connected to GND, the de-emphasis filter is disabled.


16. Power-down sequence

Follow the power-down sequence below:

1. For minimal pops, set the input digital data (SDIN) to zero for at least 8192 consecutive samples.
2. Remove the MCLK signal without applying any glitches pulses to the MCLK pin.
3. Remove the power supply voltages.


Note: A glitches pulse is any pulse that is shorter than the period defined by the minimum/maximum MCLK signal duty cycle specification and the nominal frequency of the input MCLK signal. A transient may occur on the analog outputs if the MCLK signal duty cycle specification is violated when the MCLK signal is removed during normal operation.

17. Absolute maximum ratings system design

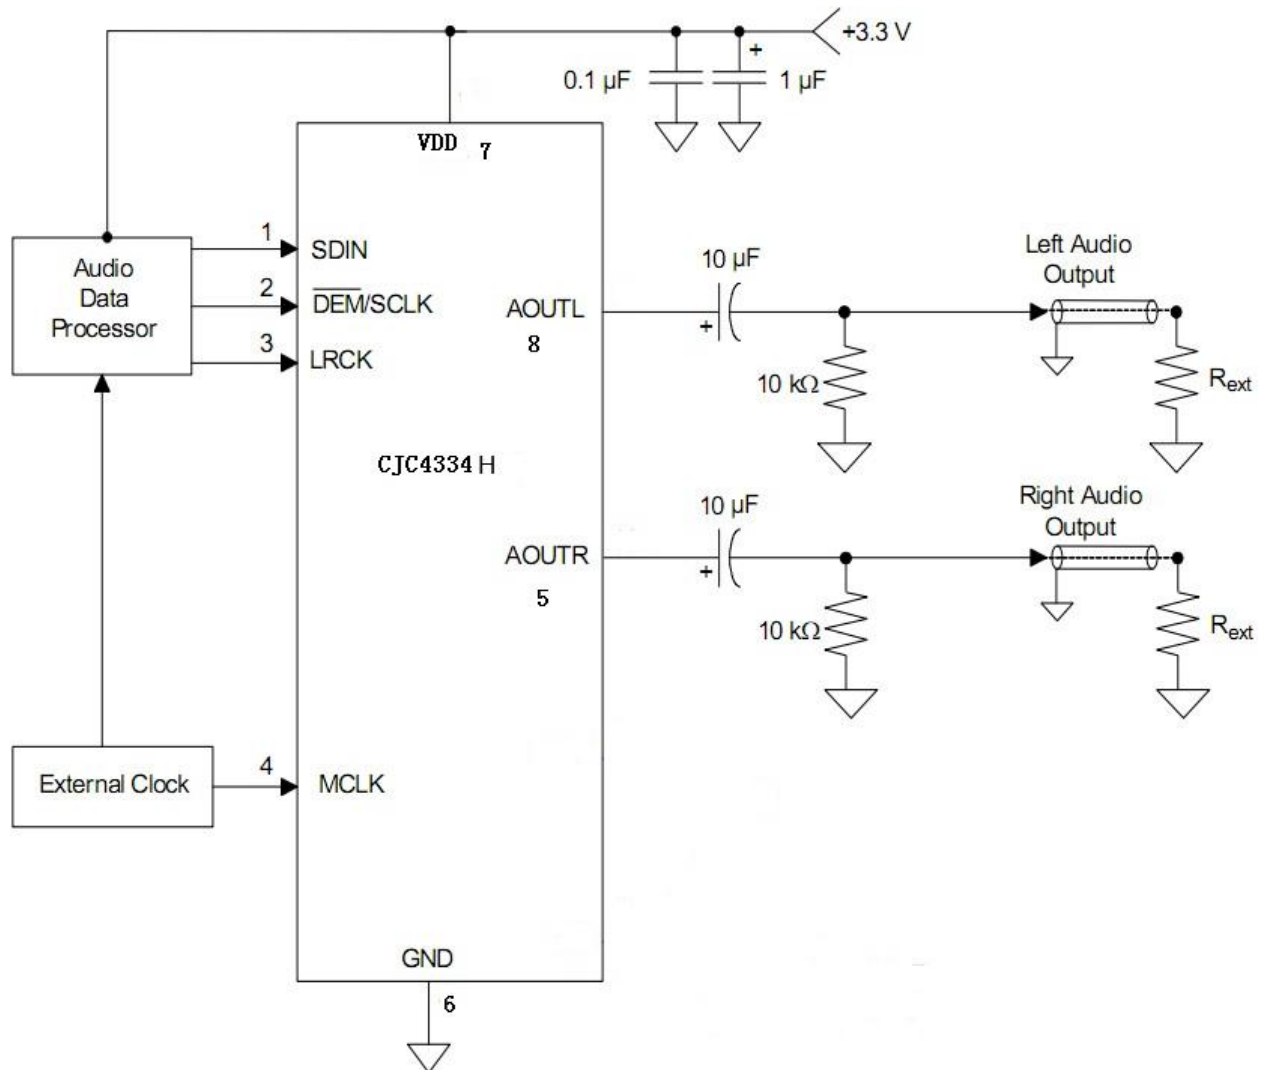

18. Package information

8-pin SOIC/SOP8L (150mil) Outline Dimensions

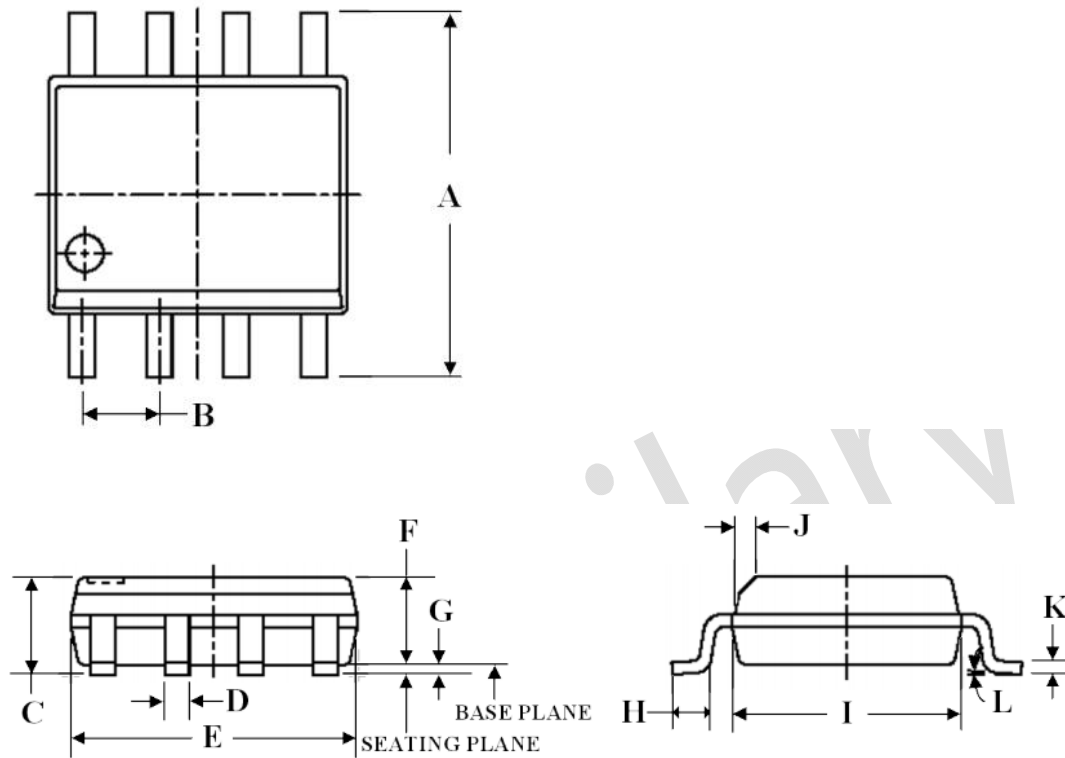

Controlling Dimension is Millimeters

Symbols	Dimensions (inch)			Dimensions (mm)		
	Min	TYP	Max	Min	TYP	Max
A	0.2300	---	0.2440	5.842	---	6.198
B	---	0.050	---	---	1.270	---
C	0.0600	---	0.0680	1.524	---	1.727
D	0.0138	---	0.0200	0.351	---	0.508
E	0.1890	---	0.1950	4.801	---	4.953
F	0.055	---	0.061	1.397	---	1.549
G	0.0040	---	0.0098	0.102	---	0.249
H	0.0160	---	0.0350	0.406	---	0.889
I	0.1520	---	0.1574	3.861	---	3.998
J	0.0100x45°	---	0.0160 x45°	0.254 x45°	---	0.406 x45°
K	0.0075	---	0.0098	0.190	---	0.250
L	0°	---	8°	0°	---	8°

19. Ordering Information

Product Model	Product Packaging	Package/Quantity	Screen Printing of Products
CJC4334H	SOP8	Reel /3000 Units	CJC4334H

Preliminary