

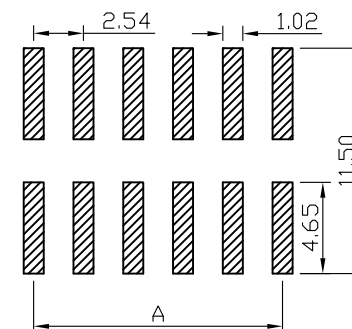
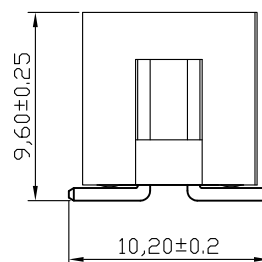


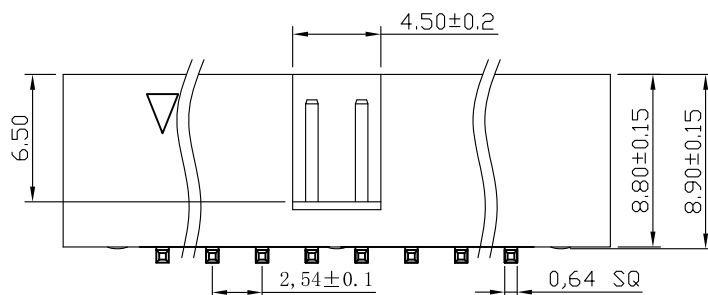

RECOMMEND P. C. B LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

SPECIFICATIONS

Current Rating: 3Amps
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Withstanding Voltage: AC 1000V
Operation Temperature: -40° to +105°
Contact Material: Brass
Insulator Material: Polyester (UL 94V-0)
Contact plating: Gold Flash
Standard: PA6T
Max. Processing Temp: 240° C for 30-60 seconds
(260° C for 10 seconds)

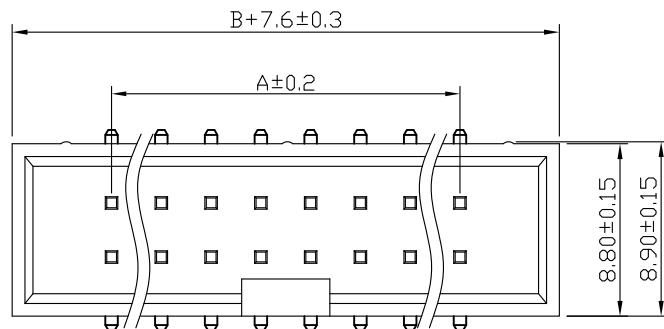

深圳市首韩科技有限公司

UNLESS OTHERWISE SPECIFIED TOLERANCE

X : ±0.30 X° : ±5°
X.X : ±0.25 X.X° : ±1°
X.XX : ±0.20 X.XX° : ±0.5°

DRAWN NAME:

SH-JN2.54-2-9P-T

SIZE

A4

SCALE

N:1

PROUCT NO.

REV

A

UNIT

mm

PROJECT

PROJECT

PROJECT

PROJECT

PROJECT

PROJECT

PROJECT

PROJECT

PROJECT

PROJECT

PROJECT

PROJECT

PROJECT

PROJECT

PROJECT

PROJECT

PROJECT

PROJECT

PROJECT

PROJECT

PROJECT

PROJECT

PROJECT

PROJECT

PROJECT

PROJECT

PROJECT

PROJECT

PROJECT

DRAWNED: 李春风 2020.11.18

CHECKED:

钟华华

2020.11.18

APPROVED:

罗孝金

2020.11.18

No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B
6	5.08	7.62	20	22.86	25.40	36	43.18	45.72
8	7.62	10.16	24	27.94	30.48	40	48.26	50.80
10	10.16	12.70	26	30.48	33.02	44	53.34	55.88
12	12.70	15.24	28	33.02	35.56	50	60.96	63.50
14	15.24	17.78	30	35.56	38.10	60	73.66	76.20
16	17.78	20.32	32	38.10	40.64	64	78.74	81.28
18	20.32	22.86	34	40.64	43.18			