

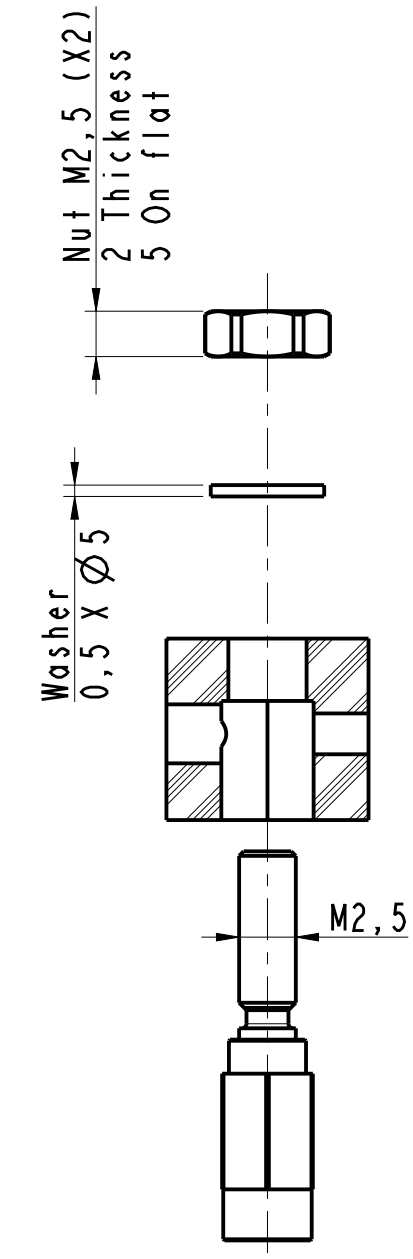
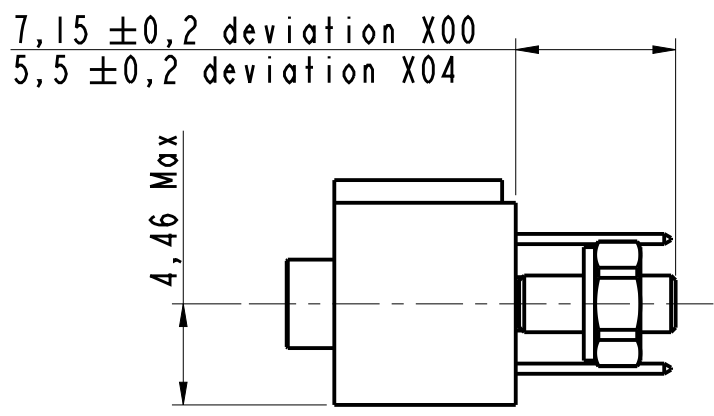
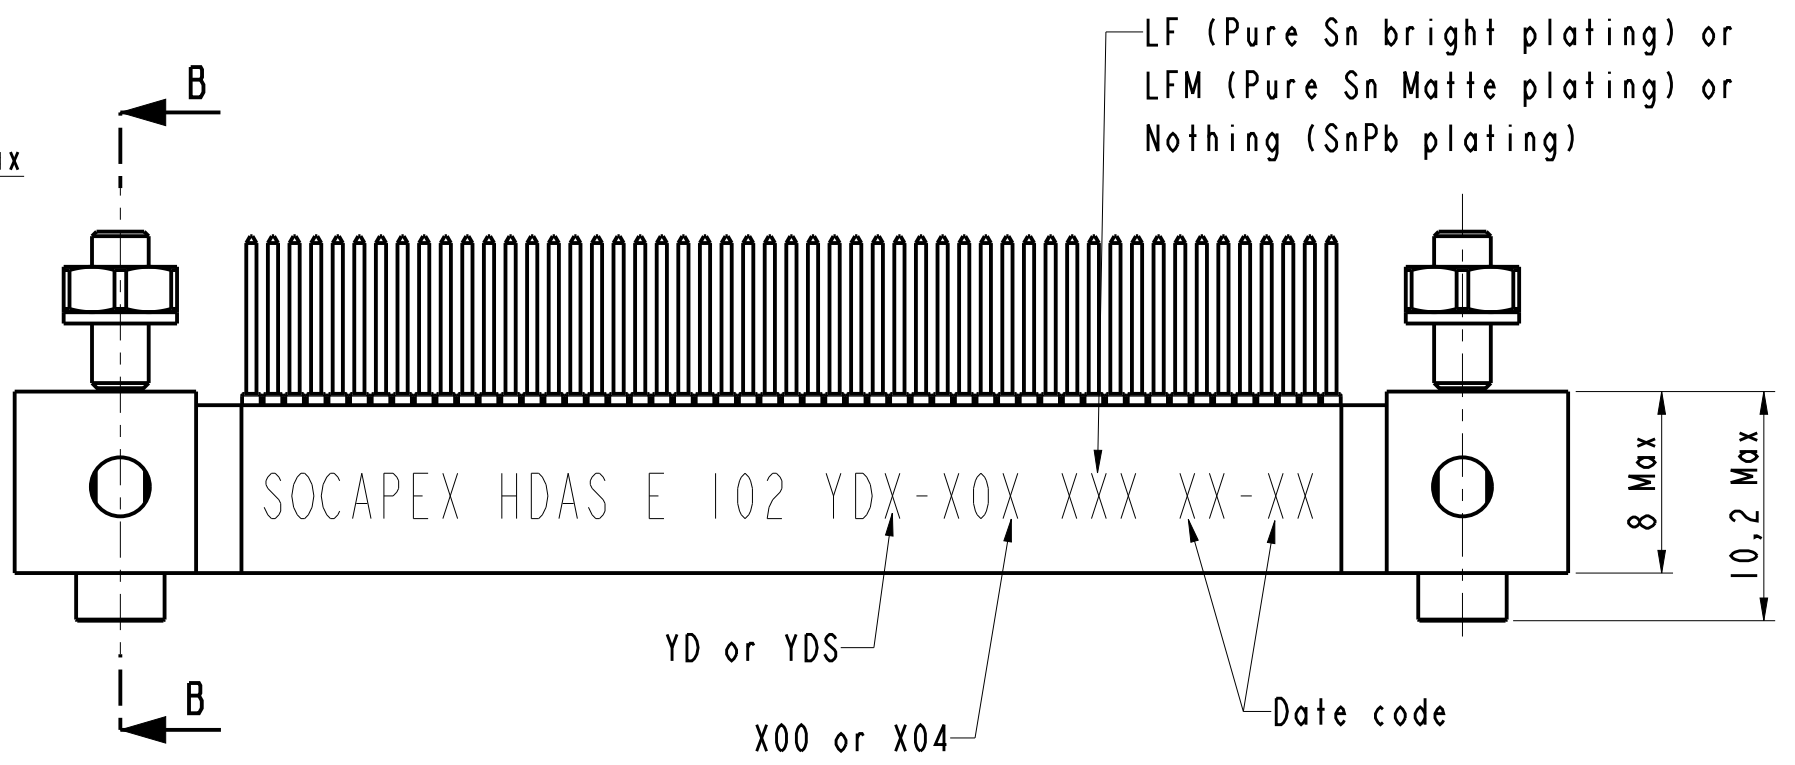


DANS LE BUT CONSTANT D'AMELIORER SES PRODUITS, Amphenol Socapex se reserve le droit d'en modifier toute cote ou caracteristique.
IMP 036 A

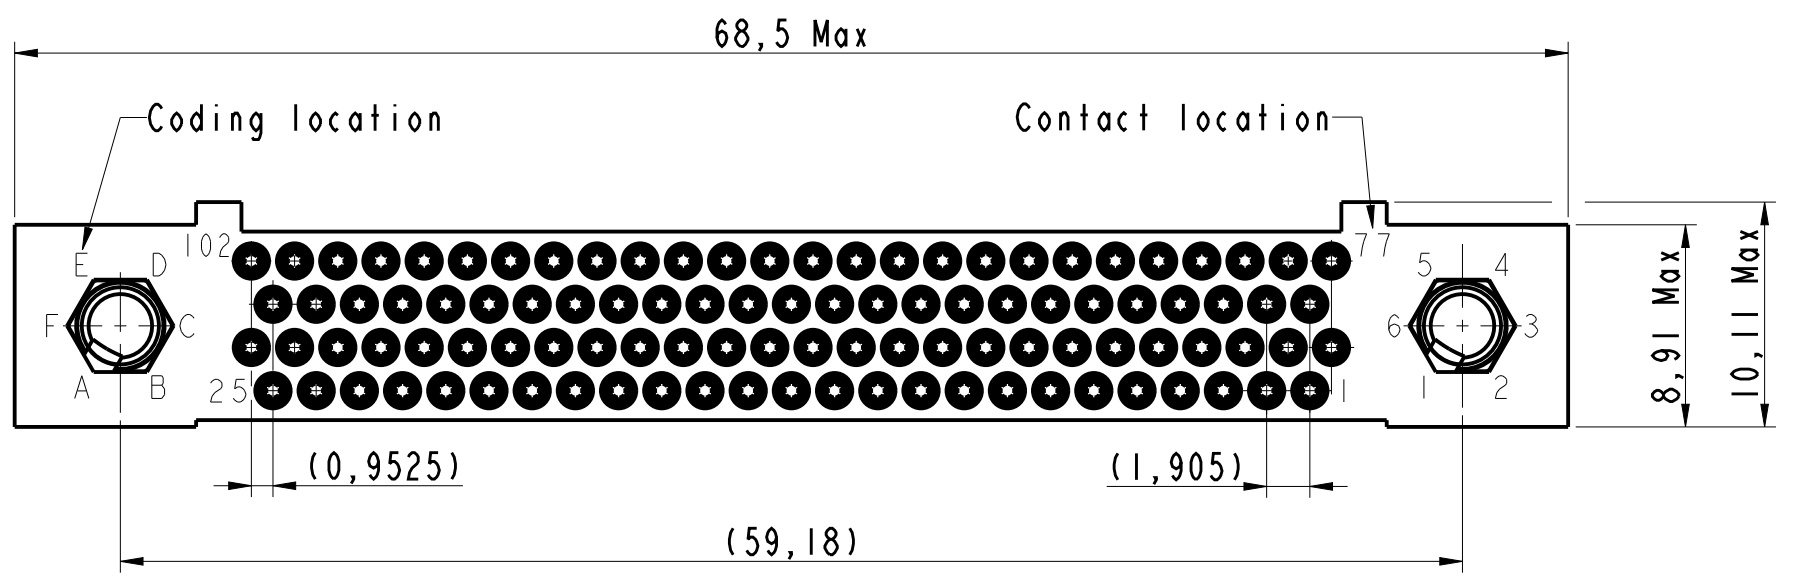



Section B-B

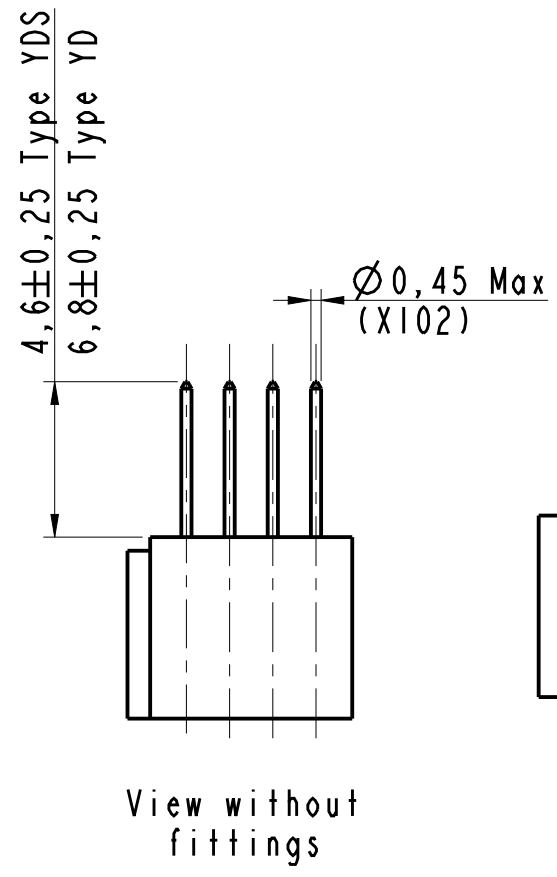

Notes:

1. Part: HDAS E 102 YDX-X0X XXX
2. External dimensions of the receptacle insulator with 102 signal contacts type YDX
3. Connector delivered with fittings not assembled, coupling torque : 0,25 Nm
4. Standard 00X : Nickel plated over brass fittings.
Deviation 10X : Passivated stainless steel fitting

MODIFICATIONS	K	Updated drawing	ECHELLE	Amphenol Socapex		DESSIN: Gimenes	LE: 24/10/05
			3			TECHNIQUE: T Carlier	LE: 16/06/20
				BP 29 - 74311 THYEZ CEDEX		K	
						169-PLC-478-00 1/2	

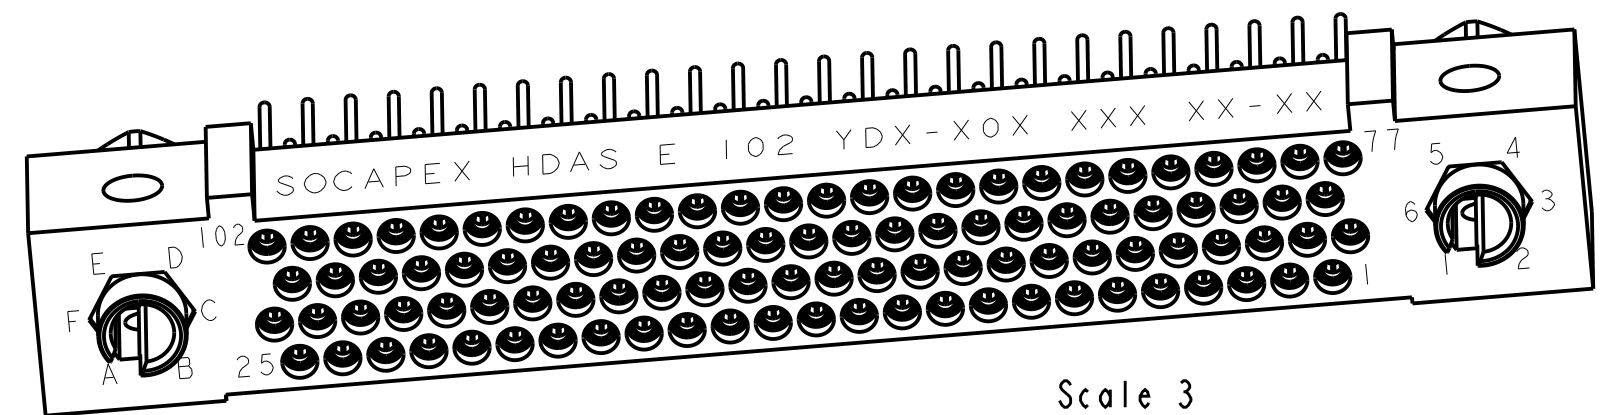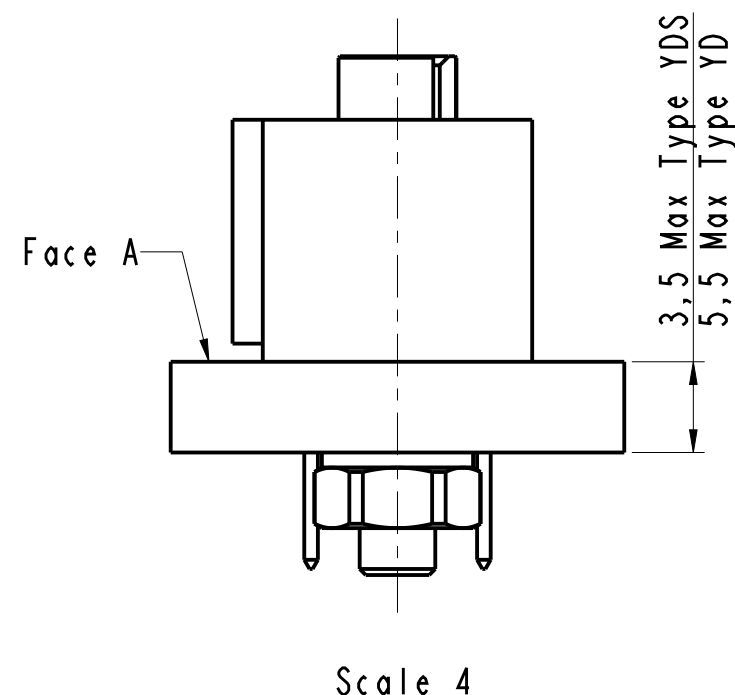

MODIFICATIONS	K	Updated drawing	ECHELLE	Amphenol Socapex BP 29 - 74311 THYEZ CEDEX	DESSIN: Gimenes								LE: 24/10/05
			4		TECHNIQUE: T Carlier								LE: 16/06/20
					K								
					169-PLC-478-00								2/2