

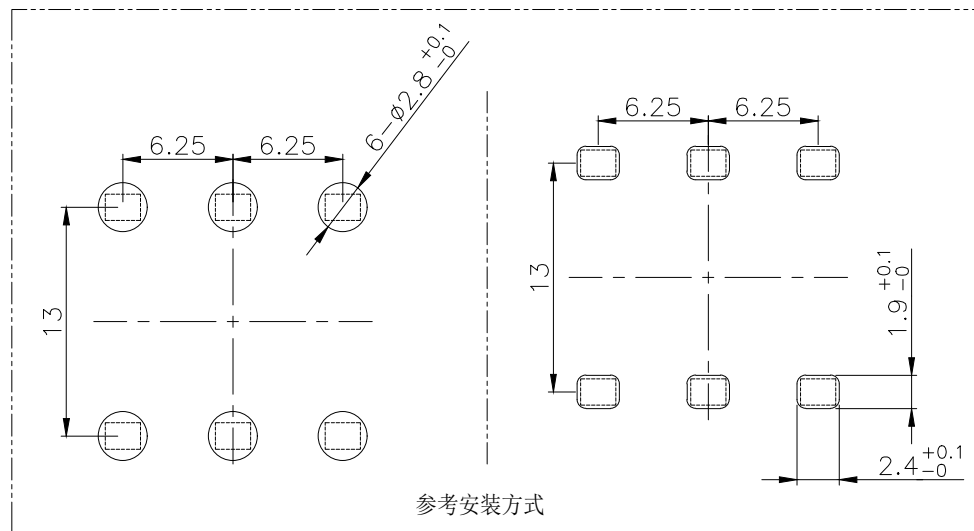
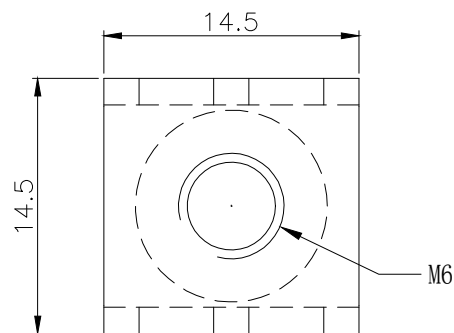


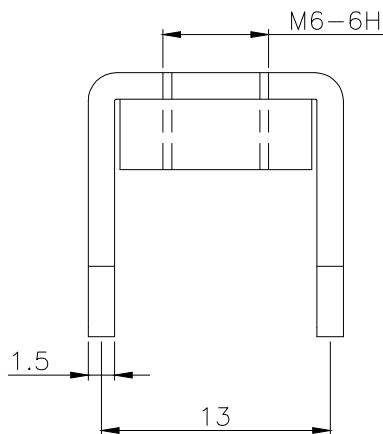


参考安装方式

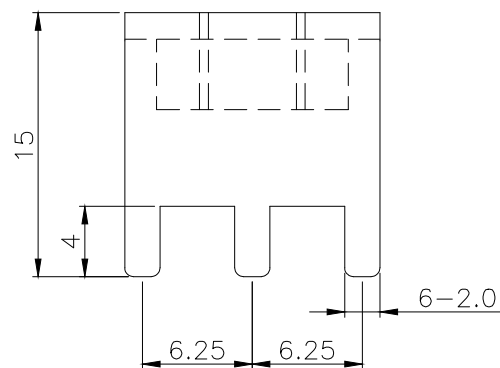

NOTES:  
备注

1. Copper ,nickel base,matte tin  
黄铜, 镍底, 镀雾锡
2. Wire screw hole M6  
压线螺孔M6
3. Current Rating: 126A  
额定电流:126A
4. There shall be no defects such as pin deformation and burrs.  
不得有脚变形, 毛刺等缺陷
5. Unmarked dimensions refer to tolerances  
未标注的尺寸参考公差

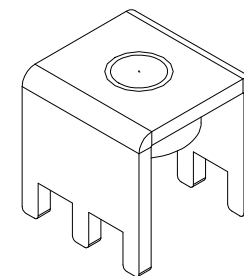

Ordering Information

HC - \* \* \* - \* \* \* - D \* \* \* - \* - 01

| Type           | Screw                  | Welding                    | Series                     | Product No.                | Material                   |
|----------------|------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| 插脚<br>(Pin)    | 2-6H (螺牙)<br>2-6H (螺牙) | 1620-1620mm<br>1620-1620mm | 1620-1620mm<br>1620-1620mm | 1620-1620mm<br>1620-1620mm | 1620-1620mm<br>1620-1620mm |
| 螺母<br>(Nut)    | 2-6H (螺牙)<br>2-6H (螺牙) | 1620-1620mm<br>1620-1620mm | 1620-1620mm<br>1620-1620mm | 1620-1620mm<br>1620-1620mm | 1620-1620mm<br>1620-1620mm |
| 焊脚<br>(Solder) | 2-6H (螺牙)<br>2-6H (螺牙) | 1620-1620mm<br>1620-1620mm | 1620-1620mm<br>1620-1620mm | 1620-1620mm<br>1620-1620mm | 1620-1620mm<br>1620-1620mm |
| 焊脚<br>(Solder) | 2-6H (螺牙)<br>2-6H (螺牙) | 1620-1620mm<br>1620-1620mm | 1620-1620mm<br>1620-1620mm | 1620-1620mm<br>1620-1620mm | 1620-1620mm<br>1620-1620mm |

| GENERAL TOLERANCE |                |             | 制 图      |  | 01 |  | 深圳市华灿天禄电子有限公司                           |                        |       |
|-------------------|----------------|-------------|----------|--|----|--|-----------------------------------------|------------------------|-------|
| DIM TOL           |                |             | 审 核      |  |    |  | ShenzhenhuacantianluELECTRONICS CO.,LTD |                        |       |
| 5 or more ±0.35   |                |             | 批 准      |  |    |  | 产品名称                                    | PCB 焊接端子 插板 铆螺母 M6     | 版本    |
| 2~5 ±0.25         |                |             | APPROVAL |  |    |  | TITLE                                   | 6焊脚 14.5x14.5x15mm     | REV.  |
| 0~2 ±0.15         |                |             | 比 例      |  |    |  | 产品料号                                    | HC-RN66-1414-D003RC-01 | 单 位   |
| Angle ±3.0°       |                |             | 投 影      |  |    |  | PART NO.                                |                        | UNITS |
| 序号                | 变更内容           | 日期          | 投影       |  |    |  | MATERIAL                                |                        | 页 次   |
| No.               | MODIFY CONTENT | MODIFY DATE |          |  |    |  |                                         |                        | SHEET |