

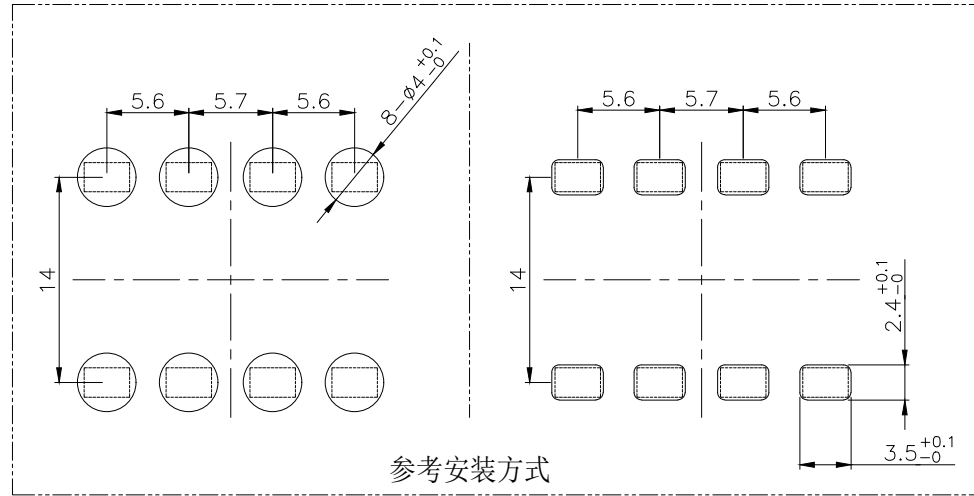
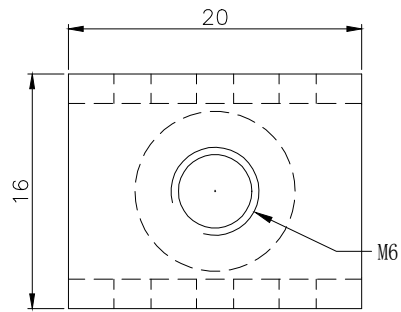
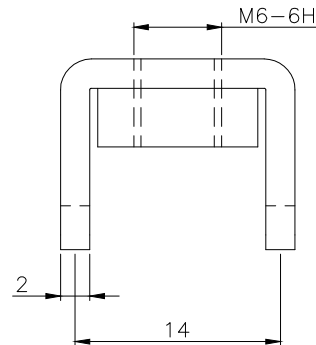


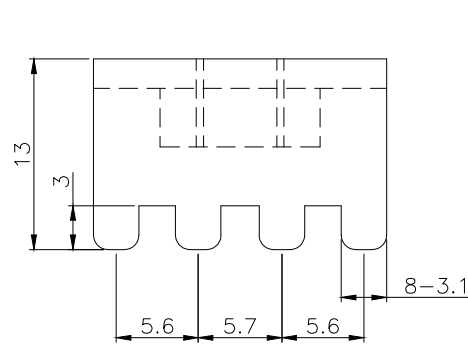

NOTES:
备注

1. Copper ,nickel base,matte tin
黄铜, 镍底, 镀雾锡
2. Wire screw hole M6
压线螺孔M6
3. Current Rating: 220A
额定电流:220A
4. There shall be no defects such as pin deformation and burrs.
不得有脚变形, 毛刺等缺陷
5. Unmarked dimensions refer to tolerances
未标注的尺寸参考公差



Ordering Information									
HC - * * * - * * * - D * * * * - 01									
Type (端子) 焊脚 (焊脚) 焊脚 (焊脚)	Thread 3-16 (螺牙) 3-16 (螺牙) 3-16 (螺牙) 3-16 (螺牙)	Welding Feet 1620-16x20mm 1620-16x20mm 1620-16x20mm	Series 1620-16x20mm 1620-16x20mm 1620-16x20mm	D-01P D-01P D-01P D-01P	Product No. 产品序号	Material 材料 (黄铜) (黄铜) (黄铜) (黄铜)			

			GENEERL TOLERANCE	制 图 DRAWING	01	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审 核 CHECK					
			5 or more ±0.35	批 准 APPROVAL		产品名称 TITLE	PCB 焊接端子 插板 铆螺母 M6 8焊脚 16x20x13mm	版 本 REV.	A
1	初版发行		2~5 ±0.25	比 例 SCALE		产品料号 PART NO.	HC-RN68-1620-D004RC-01	单 位 UNITS	mm
			0~2 ±0.15						
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle ±3.0°	投 影 Projection		材 料 MATERIAL		页 次 SHEET	1/1