
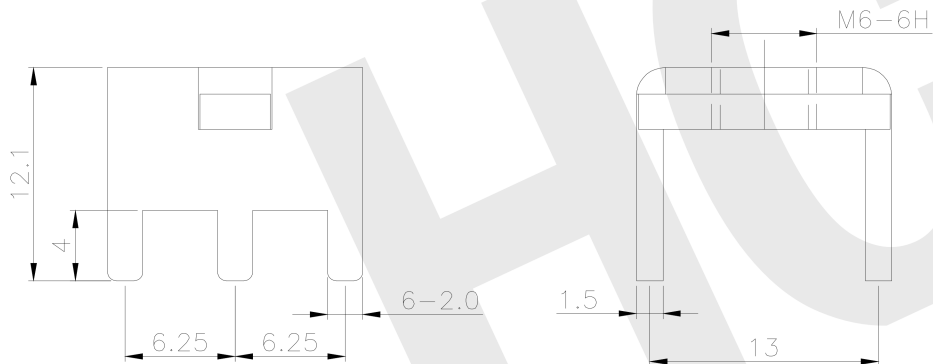
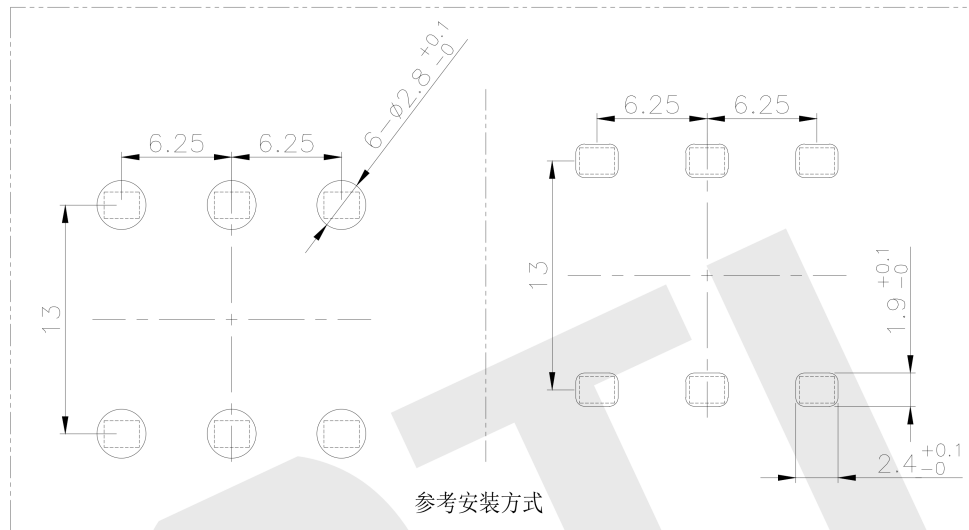


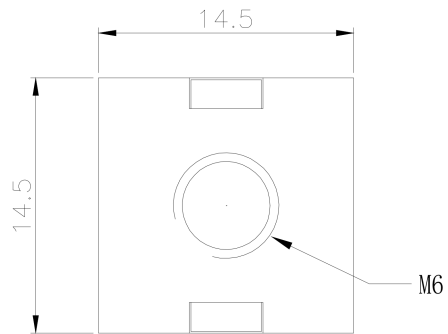

NOTES:
备注

1. Red copper ,nickel base,matte tin
紫铜, 镍底, 镀雾锡
2. Wire screw hole M6
压线螺孔M6
3. Current Rating: 100A
额定电流:100A
4. There shall be no defects such as
pin deformation and burrs.
不得有脚变形, 毛刺等缺陷
5. Unmarked dimensions refer to tolerances
未标注的尺寸参考公差

Ordering Information

HC - * * * - * * * - D * * * - 01

Type	Screw	Welding	Series	Product No.	Material
插板 (插板)	3-6H (螺孔)	100A-100A	100A-100A	插板 (插板)	紫铜 (紫铜)
插板 (插板)	3-6H (螺孔)	100A-100A	100A-100A	插板 (插板)	紫铜 (紫铜)
插板 (插板)	3-6H (螺孔)	100A-100A	100A-100A	插板 (插板)	紫铜 (紫铜)
插板 (插板)	3-6H (螺孔)	100A-100A	100A-100A	插板 (插板)	紫铜 (紫铜)
插板 (插板)	3-6H (螺孔)	100A-100A	100A-100A	插板 (插板)	紫铜 (紫铜)



GENERAL TOLERANCE

制 图

01

深圳市华灿天禄电子有限公司
ShenzhenhuacantianluELECTRONICS CO., LTD

DIM TOL

审 核

CHECK

产品名称
TITLE
PCB 焊接端子 插板 铆垫片 M6
6焊脚 14.5x14.5x12.1mm

版 本
REV.

A

5 or more ±0.35

批 准

APPROVAL

产品料号
PART NO.
HC-RG66-1414-D002RC-01

单 位
UNITS

mm

2~5 ±0.25

比 例

SCALE

材料
MATERIAL

页 次
SHEET

1/1

0~2 ±0.15

投 影

Projection

日期
MODIFY DATE

变更内容
MODIFY CONTENT

序号
NO.

Angle ±3.0°

1

初版发行

1

工程专用章

1