
PART NUMBER**HA7-5221^R**

Rochester Electronics**Manufactured Components**

Rochester branded components are manufactured using either die/wafers purchased from the original suppliers or Rochester wafers recreated from the original IP. All re-creations are done with the approval of the Original Component Manufacturer. (OCM)

Parts are tested using original factory test programs or Rochester developed test solutions to guarantee product meets or exceeds the OCM data sheet.

Quality Overview

- ISO-9001
- AS9120 certification
- Qualified Manufacturers List (QML) MIL-PRF-38535
 - Class Q Military
 - Class V Space Level

Qualified Suppliers List of Distributors (QSLD)

- Rochester is a critical supplier to DLA and meets all industry and DLA standards.

Rochester Electronics, LLC is committed to supplying products that satisfy customer expectations for quality and are equal to those originally supplied by industry manufacturers.

The original manufacturer's datasheet accompanying this document reflects the performance and specifications of the Rochester manufactured version of this device. Rochester Electronics guarantees the performance of its semiconductor products to the original OCM specifications. 'Typical' values are for reference purposes only. Certain minimum or maximum ratings may be based on product characterization, design, simulation, or sample testing.

Low Noise, Wideband, Precision Operational Amplifier

July 1994

Features

- This Circuit is Processed in Accordance to MIL-STD-883 and is Fully Conformant Under the Provisions of Paragraph 1.2.1.
- Gain Bandwidth Product..... 100MHz (Min)
- Unity Gain Bandwidth..... 30MHz (Min)
40MHz (Typ)
- High Slew Rate..... 25V/ μ s (Min)
37V/ μ s (Typ)
- Low Offset Voltage..... 0.75mV (Max)
0.30mV (Typ)
- High Open Loop Gain..... 106dB (Min)
128dB (Typ)
- Low Voltage Noise (at 1kHz)..... 5.8nV/ $\sqrt{\text{Hz}}$ (Max)
3.6nV/ $\sqrt{\text{Hz}}$ (Typ)
- Low Current Noise (at 1kHz)..... 2.0pA/ $\sqrt{\text{Hz}}$ (Max)
1.4pA/ $\sqrt{\text{Hz}}$ (Typ)
- High Output Current..... $\pm 30\text{mA}$ (Min)
 $\pm 56\text{mA}$ (Typ)
- Low Supply Current..... 10mA (Max)
8mA (Typ)

Applications

- Precision Test Systems
- Active Filtering
- Small Signal Video
- Accurate Signal Processing
- RF Signal Conditioning

Description

The HA-5221/883 is a high performance, dielectrically isolated, monolithic op amp, featuring precision DC characteristics while providing excellent AC characteristics. Designed for audio, video, and other demanding applications, noise (3.6nV/ $\sqrt{\text{Hz}}$ at 1kHz typ), total harmonic distortion (<0.005% typ), and DC errors are kept to a minimum.




The precision performance is shown by low offset voltage (0.3mV typ), low bias currents (40nA typ), low offset currents (15nA typ), and high open loop gain (128dB typ). The combination of these excellent DC characteristics with fast settling time (0.4 μ s typ) make the HA-5221/883 ideally suited for precision signal conditioning.

The unique design of the HA-5221/883 gives this device outstanding AC characteristics, including high unity gain bandwidth (40MHz typ) and high slew rate (37V/ μ s typ), not normally associated with precision op amps. Other key specifications include high CMRR (95dB typ) and high PSRR (100dB typ). The combination of these specifications will allow the HA-5221/883 to be used in RF signal conditioning as well as video amplifiers.

Ordering Information

PART NUMBER	TEMPERATURE RANGE	PACKAGE
HA2-5221/883	-55°C to +125°C	8 Pin Can
HA4-5221/883	-55°C to +125°C	20 Lead Ceramic LCC
HA7-5221/883	-55°C to +125°C	8 Lead CerDIP

Pinouts

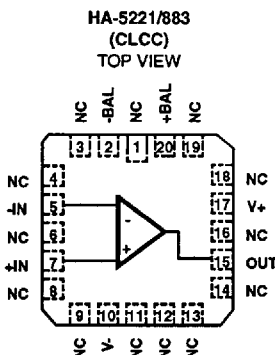

Specifications HA-5221/883

Absolute Maximum Ratings

Voltage Between V+ and V- Terminals	36V
Differential Input Voltage	5V
Voltage at Either Input Terminal	V+ to V-
Peak Output Current (Pulsed at 1ms, 10% Duty Cycle)	100mA
Continuous Output Current	Short Circuit Protected
Junction Temperature	+175°C
Storage Temperature Range	-65°C to +150°C
ESD Rating	<2000V
Lead Temperature (Soldering 10s)	+300°C

Thermal Information

Thermal Resistance	θ_{JA}	θ_{JC}
CerDIP Package	110°C/W	27°C/W
Ceramic LCC Package	64°C/W	13°C/W
Metal Can Package	148°C/W	67°C/W
Package Power Dissipation Limit at +75°C		
CerDIP Package	0.91W	
Ceramic LCC Package	1.56W	
Metal Can Package	0.68W	
Package Power Dissipation Derating Factor Above +75°C		
CerDIP Package	9.1mW/°C	
Ceramic LCC Package	15.6mW/°C	
Metal Can Package	6.8mW/°C	

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

Operating Conditions

Operating Temperature Range	-55°C to +125°C	$V_{INCM} \leq 1/2 (V+ - V-)$
Operating Supply Voltage	±10V to ±15V	$R_L \geq 1k\Omega$

TABLE 1. DC ELECTRICAL PERFORMANCE CHARACTERISTICS

Device Tested at: $V_{SUPPLY} = \pm 15V$, $R_{LOAD} = 1k\Omega$, $V_{OUT} = 0V$, Unless Otherwise Specified.

PARAMETERS	SYMBOL	CONDITIONS	GROUP A SUBGROUPS	TEMPERATURE	LIMITS		UNITS
					MIN	MAX	
Input Offset Voltage	V_{IO}	$V_{CM} = 0V$	1	+25°C	-0.75	0.75	mV
			2, 3	+125°C, -55°C	-1.5	1.5	mV
Input Bias Current	$+I_B$	$V_{CM} = 0V$, $+R_S = 100.1k\Omega$, $-R_S = 100\Omega$	1	+25°C	-80	80	nA
			2, 3	+125°C, -55°C	-200	200	nA
	$-I_B$	$V_{CM} = 0V$, $+R_S = 100\Omega$, $-R_S = 100.1k\Omega$	1	+25°C	-80	80	nA
			2, 3	+125°C, -55°C	-200	200	nA
Input Offset Current	I_{IO}	$V_{CM} = 0V$, $+R_S = 100.1k\Omega$, $-R_S = 100.1k\Omega$	1	+25°C	-50	50	nA
			2, 3	+125°C, -55°C	-150	150	nA
Common Mode Range	+CMR	$V+ = +3V$, $V- = -27V$	1	+25°C	12	-	V
			2, 3	+125°C, -55°C	12	-	V
	-CMR	$V+ = +27V$, $V- = -3V$	1	+25°C	-	-12	V
			2, 3	+125°C, -55°C	-	-12	V
Large Signal Voltage Gain	+A _{VOL}	$V_{OUT} = 0V$ and +10V	4	+25°C	106	-	dB
			5, 6	+125°C, -55°C	100	-	dB
	-A _{VOL}	$V_{OUT} = 0V$ and -10V	4	+25°C	106	-	dB
			5, 6	+125°C, -55°C	100	-	dB
Common Mode Rejection Ratio	+CMRR	$\Delta V_{CM} = +10V$, $V+ = +5V$, $V- = -25V$, $V_{OUT} = -10V$	1	+25°C	88	-	dB
			2, 3	+125°C, -55°C	86	-	dB
	-CMRR	$\Delta V_{CM} = -10V$, $V+ = +25V$, $V- = -5V$, $V_{OUT} = +10V$	1	+25°C	88	-	dB
			2, 3	+125°C, -55°C	86	-	dB
Output Voltage Swing	+V _{OUT}	$R_L = 1k\Omega$	4	+25°C	12.0	-	V
			5, 6	+125°C, -55°C	11.5	-	V
	-V _{OUT}	$R_L = 1k\Omega$	4	+25°C	-	-12.0	V
			5, 6	+125°C, -55°C	-	-11.5	V

3

OPERATIONAL
AMPLIFIERS

Spec Number 511061-883

Specifications HA-5221/883

TABLE 1. DC ELECTRICAL PERFORMANCE CHARACTERISTICS (Continued)

Device Tested at: $V_{SUPPLY} = \pm 15V$, $R_{LOAD} = 1k\Omega$, $V_{OUT} = 0V$, Unless Otherwise Specified.

PARAMETERS	SYMBOL	CONDITIONS	GROUP A SUBGROUPS	TEMPERATURE	LIMITS		UNITS
					MIN	MAX	
Output Current	$+I_{OUT}$	$V_{OUT} = +10V$, $R_L = 1k\Omega$	4	+25°C	30	-	mA
			5, 6	+125°C, -55°C	30	-	mA
	$-I_{OUT}$	$V_{OUT} = -10V$, $R_L = 1k\Omega$	4	+25°C	-	-30	mA
			5, 6	+125°C, -55°C	-	-30	mA
Quiescent Power Supply Current	$+I_{CC}$	$V_{OUT} = 0V$, $I_{OUT} = 0mA$	1	+25°C	-	10	mA
			2, 3	+125°C, -55°C	-	11	mA
	$-I_{CC}$	$V_{OUT} = 0V$, $I_{OUT} = 0mA$	1	+25°C	-10	-	mA
			2, 3	+125°C, -55°C	-11	-	mA
Power Supply Rejection Ratio	+PSRR	$\Delta V_{SUP} = 10V$, $V_+ = +20V$, $V_- = -15V$, $V_+ = +10V$, $V_- = -15V$	1	+25°C	90	-	dB
			2, 3	+125°C, -55°C	86	-	dB
	-PSRR	$\Delta V_{SUP} = 10V$, $V_+ = +15V$, $V_- = -20V$, $V_+ = +15V$, $V_- = -10V$	1	+25°C	90	-	dB
			2, 3	+125°C, -55°C	86	-	dB
Offset Voltage Adjustment	$+V_{IOAdj}$	Note 1	1	+25°C	V_{IO-1}	-	mV
			2, 3	+125°C, -55°C	V_{IO-1}	-	mV
	$-V_{IOAdj}$	Note 1	1	+25°C	V_{IO+1}	-	mV
			2, 3	+125°C, -55°C	V_{IO+1}	-	mV

NOTE:

- Offset adjustment range is $[V_{IO}]$ (Measured $\pm 1mV$) minimum referred to output. This test is for functionality only to assure adjustment through 0V.

TABLE 2. AC ELECTRICAL PERFORMANCE CHARACTERISTICS

Table 2 Intentionally Left Blank. See AC specifications in Table 3.

TABLE 3. ELECTRICAL PERFORMANCE CHARACTERISTICS

Device Characterized at: $V_{SUPPLY} = \pm 15V$, $R_{LOAD} = 1k\Omega$, $C_{LOAD} = 50pF$, Unless Otherwise Specified.

PARAMETERS	SYMBOL	CONDITIONS	NOTES	TEMPERATURE	LIMITS		UNITS
					MIN	MAX	
Input Noise Voltage Density	E_N	$R_S = 0\Omega$, $f_O = 10Hz$	1, 5	+25°C	-	24.0	nV/ $\sqrt{Hz}$
		$R_S = 0\Omega$, $f_O = 100Hz$	1, 5	+25°C	-	8.0	nV/ $\sqrt{Hz}$
		$R_S = 0\Omega$, $f_O = 1kHz$	1, 5	+25°C	-	5.8	nV/ $\sqrt{Hz}$
Input Noise Current Density	I_N	$R_S = 500k\Omega$, $f_O = 10Hz$	1, 5	+25°C	-	11.5	pA/ $\sqrt{Hz}$
		$R_S = 500k\Omega$, $f_O = 100Hz$	1, 5	+25°C	-	6.0	pA/ $\sqrt{Hz}$
		$R_S = 500k\Omega$, $f_O = 1kHz$	1, 5	+25°C	-	2.0	pA/ $\sqrt{Hz}$
Gain Bandwidth Product	GBWP	$V_{OUT} = 200mV_{p-p}$, $f_O = 100kHz$	1	+25°C	100	-	MHz
				-55°C to +125°C	90	-	MHz
Unity Gain Bandwidth	UGBW	$V_{OUT} = 200mV$	1	+25°C	30	-	MHz
				-55°C to +125°C	25	-	MHz

Specifications HA-5221/883

TABLE 3. ELECTRICAL PERFORMANCE CHARACTERISTICS (Continued)

Device Characterized at: $V_{SUPPLY} = \pm 15V$, $R_{LOAD} = 1k\Omega$, $C_{LOAD} = 50pF$, Unless Otherwise Specified.

PARAMETERS	SYMBOL	CONDITIONS	NOTES	TEMPERATURE	LIMITS		UNITS
					MIN	MAX	
Slew Rate	$\pm SR$	$V_{OUT} = \pm 2.5V$ $C_L = 50pF$	1	-55°C to +125°C	25	-	V/ μs
Full Power Bandwidth	FPBW	$V_{PEAK} = 10V$	1, 2	-55°C to +125°C	398	-	kHz
Minimum Closed Loop Stable Gain	CLSG	$R_L = 1k\Omega$, $C_L = 50pF$	1	-55°C to +125°C	1	-	V/V
Rise and Fall Time	t_R, t_F	$V_{OUT} = \pm 100mV$	1, 4	+25°C	-	20	ns
Overshoot	$\pm OS$	$V_{OUT} = \pm 100mV$	1	+25°C	-	25	%
				-55°C to +125°C	-	30	%
Power Consumption	PC	$V_{OUT} = 0V$, $I_{OUT} = 0mA$	1, 3	-55°C to +125°C	-	660	mW

NOTES:

- Parameters listed in Table 3 are controlled via design or process parameters and are not directly tested at final production. These parameters are lab characterized upon initial design release, or upon design changes. These parameters are guaranteed by characterization based upon data from multiple production runs which reflect lot to lot and within lot variation.
- Full Power Bandwidth guarantee based on Slew Rate measurement using $FPBW = Slew\ Rate / (2\pi V_{PEAK})$.
- Power Consumption based upon Quiescent Supply Current test maximum. (No load on outputs.).
- Measured between 10% and 90% points.
- Input Noise Voltage Density and Input Noise Current Density limits are based on characterization data.

TABLE 4. ELECTRICAL TEST REQUIREMENTS

MIL-STD-883 TEST REQUIREMENTS	SUBGROUPS (SEE TABLE 1)
Interim Electrical Parameters (Pre Burn-In)	1
Final Electrical Test Parameters	1 (Note 1), 2, 3, 4, 5, 6
Group A Test Requirements	1, 2, 3, 4, 5, 6
Groups C and D Endpoints	1

NOTE:

- PDA applies to Subgroup 1 only.

Die Characteristics**DIE DIMENSIONS:**72 x 94 x 19 mils $\pm$ 1 mils1840 x 2400 x 483 μ m $\pm$ 25.4 μ m**METALLIZATION:**

Type: Al, 1% Cu

Thickness: 16k $\text{\AA}$ $\pm$ 2k $\text{\AA}$ **GLASSIVATION:**Type: Nitride (Si₃N₄) over Si₂O₃ (SiO₂, 5% Phos.)Si₂O₃ Thickness: 12k $\text{\AA}$ $\pm$ 2k $\text{\AA}$ Nitride Thickness: 3.5k $\text{\AA}$ $\pm$ 1.5k $\text{\AA}$ **WORST CASE CURRENT DENSITY:**4.2 x 10⁴ A/cm²**SUBSTRATE POTENTIAL (Powered Up): V-****TRANSISTOR COUNT: 62****PROCESS: Bipolar Dielectric Isolation****Metallization Mask Layout**