

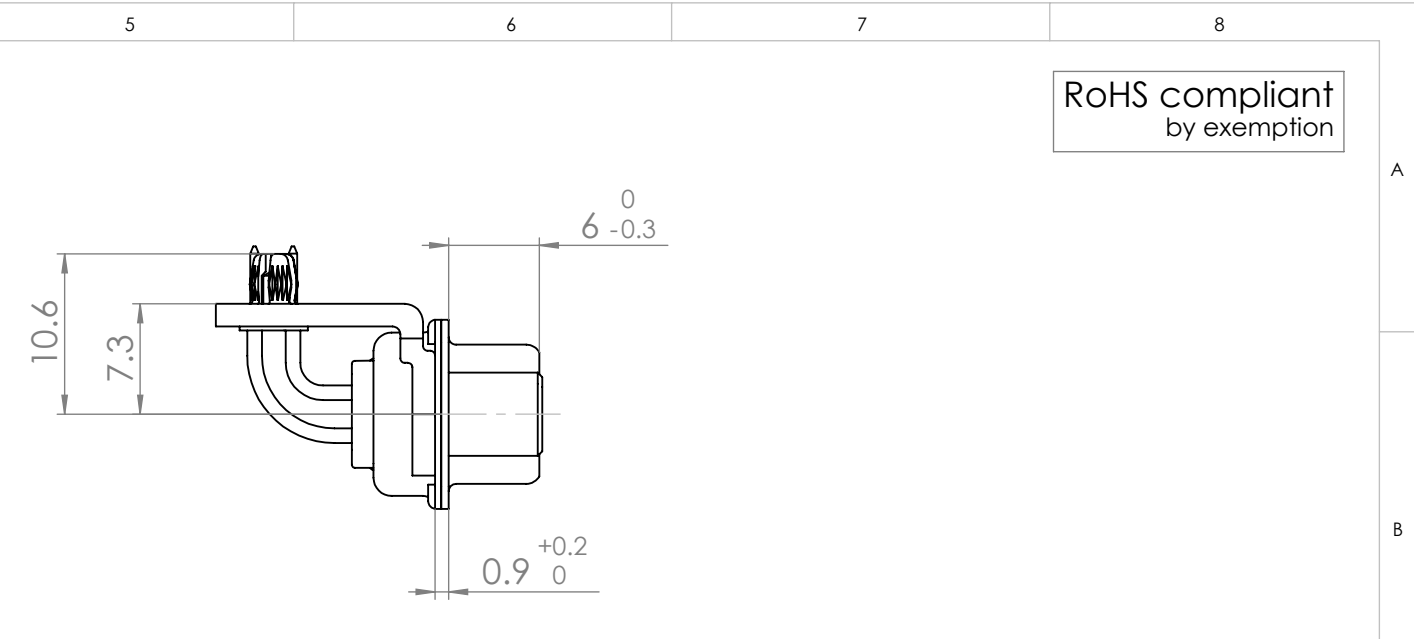


COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUPLICATED NOR MADE AVAILABLE TO A THIRD PARTY.
AND IT ALSO MAY NOT BE IMPROPERLY USED BY THE RECEIVER, OR A THIRD PARTY.

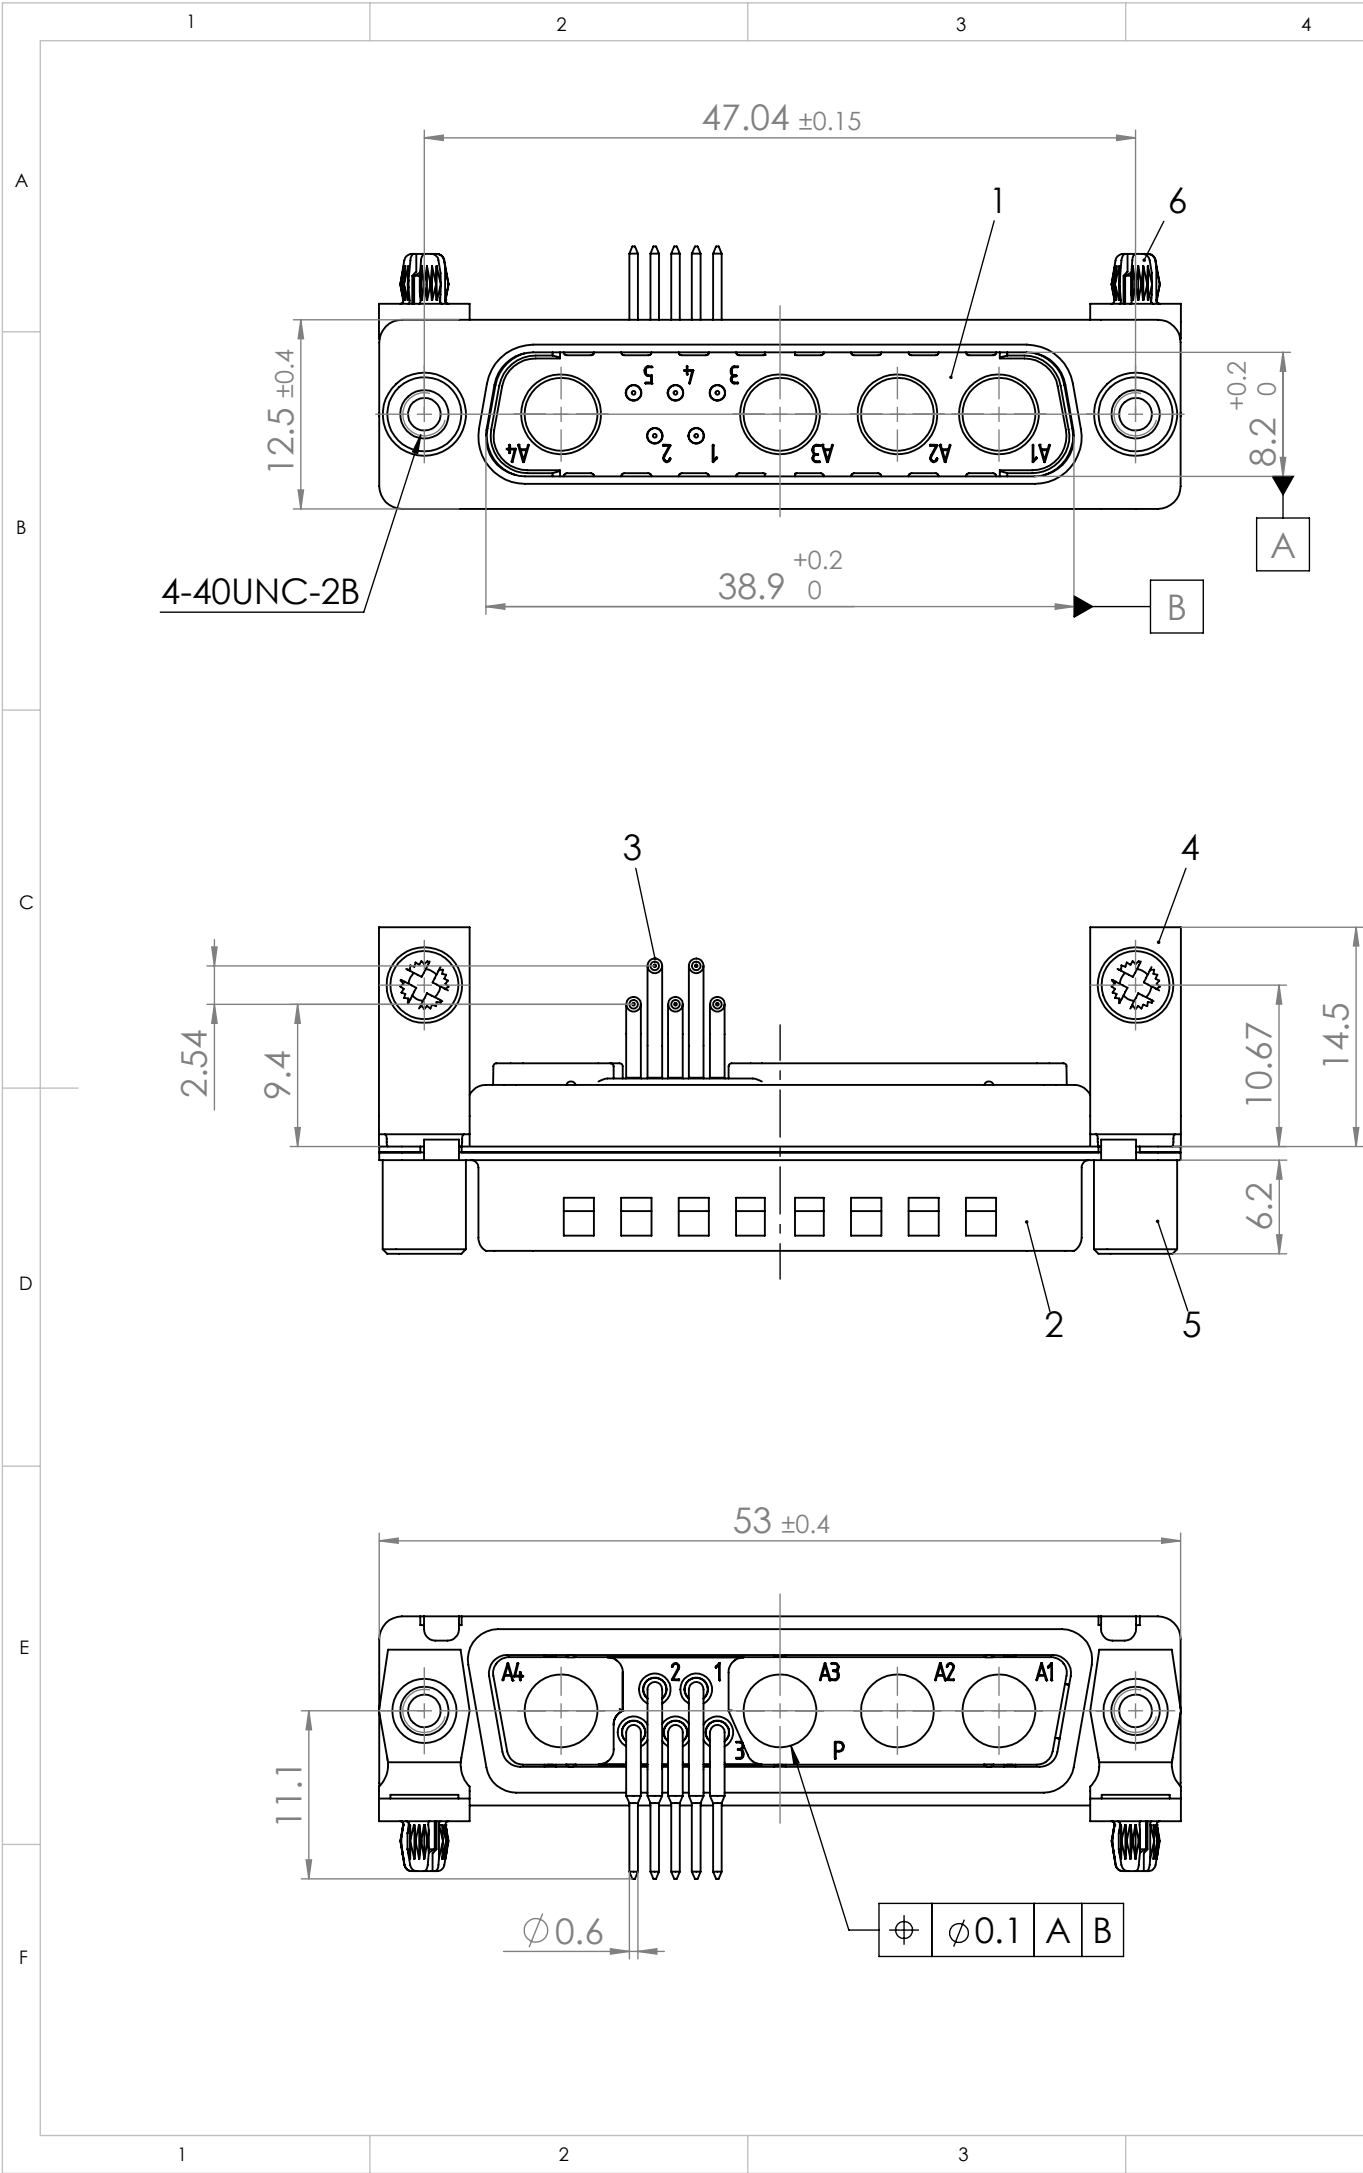

PCB hole pattern, mounting side

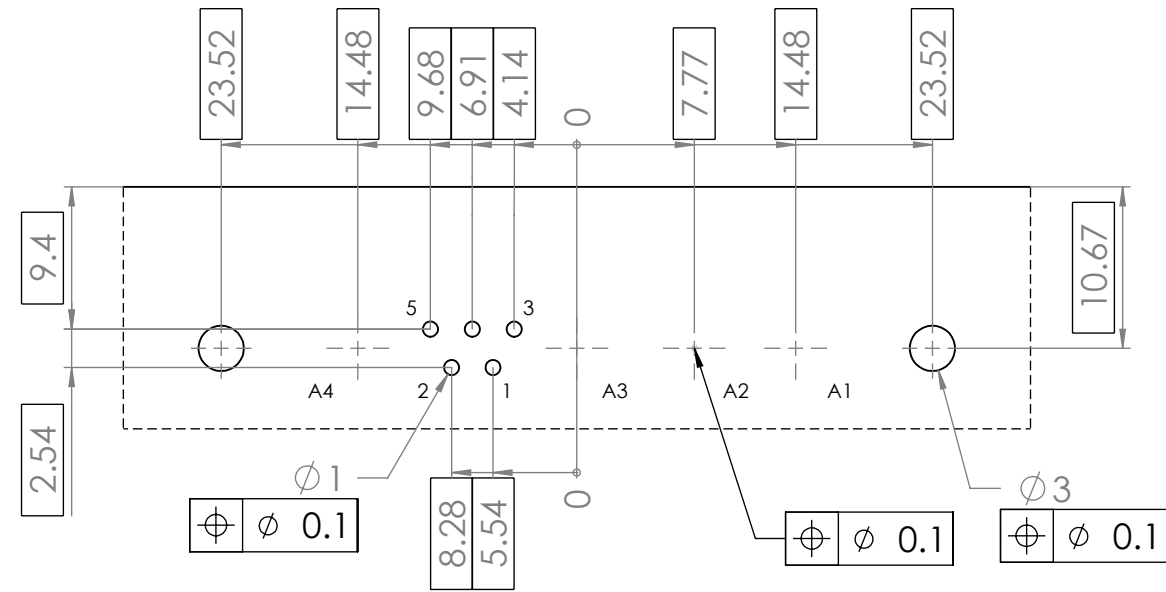

6	2	Snap-in rivet	PCB 1.6mm / Brass	tin plated
5	2	Threaded spacer	MW 4-40 / Steel	tin plated
4	2	Bracket	F1080-13B / Steel	tin plated
3	5	Signal contact	P5 / Brass	0.8µm Au
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C to +130°C) acc. UL94V-0	green
No.	St.	Part	Type Description/Material	Surface plating/Colour/Class
FUNCTIONAL SYMBOLS				
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
DIMENSION UNITS		SCALE	MEASUREMENTS WITHOUT TOLERANCE ACC. TO ISO 2768-m	
mm		2:1		
			CURRENT REVISION	
			DRWN: DRAWN BY	msteinbrueck
			APPR: APPR BY	fvetter
			14-03-2023	14-03-2023
			INITIAL REVISION	
			DRWN: DRAWN BY	sschref
			APPR: APPR BY	ADenzinger
			31-10-2005	02-11-2005
			PRODUCT CUSTOMER DRAWING	
			MATERIAL NUMBER	
			1731070382	
			REVISION	
			2	
			DOCUMENT NUMBER	
			FM9W4P5-1004	
			CUSTOMER	
			GENERAL MARKET	
			SHEET NUMBER	
			1 OF 1	