

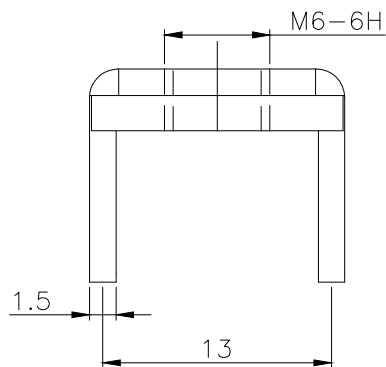
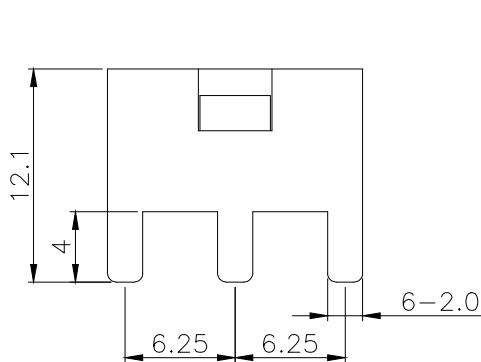
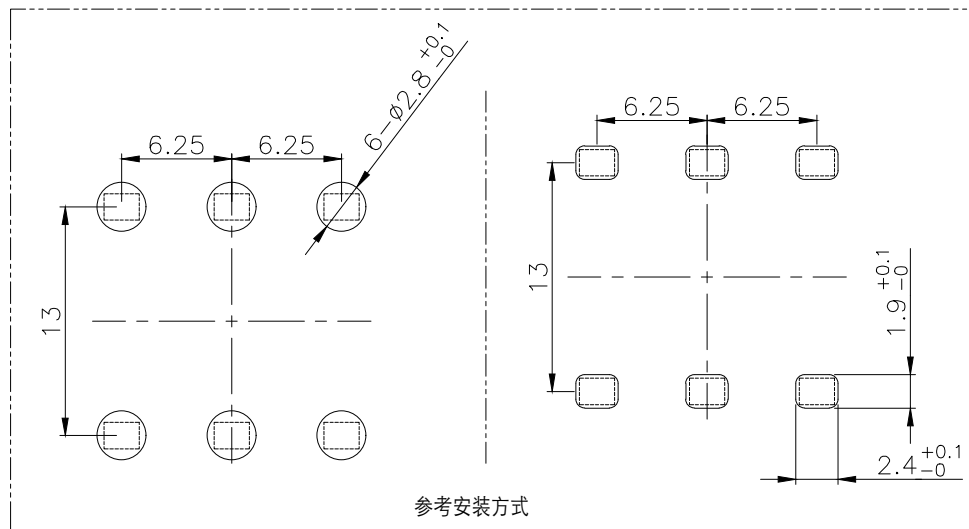


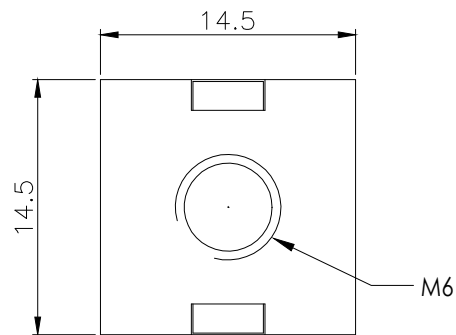

NOTES:

备注

- 1.Red copper ,nickel base,matte tin
紫铜，镍底，镀雾锡
- 2.Wire screw hole M6
压线螺孔M6
- 3.Current Rating: 100A
额定电流:100A
- 4.There shall be no defects such as pin deformation and burrs.
不得有脚变形，毛刺等缺陷
- 5.Unmarked dimensions refer to tolerances
未标注的尺寸参考公差

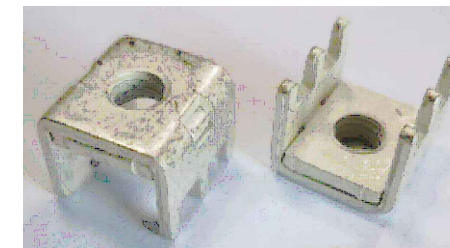

Ordering Information

Type	Screw Thread	Feet	Series	D=2P	Product No.	Material
M-Pull Teeth (插针)	3x3x3 (螺孔)	2x2个	0808-8x8mm 1014-10x14mm	5x5mm 10x10mm	产品序号	紫铜 (镀锡) 镍底 (镀锡) 铜底 (镀锡)
2x2个	4x4mm (螺孔)	4x4个	---	---	---	---
4x4个	5x5mm (螺孔)	5x5个	---	---	---	---
6x6个	6x6mm (螺孔)	6x6个	---	---	---	---

			GENERAL TOLERANCE	制 图 DRAWING	01	 深圳讯答科技有限公司 ShenzhenXunDaTechnology Co.,Ltd			
			DIM TOL	审 核 CHECK					
			X.X ±0.30	批 准 APPROVAL		产品名称 TITLE	PCB 焊接端子 (插板 铆垫片 M6 6焊脚 14.5x14.5x12.1mm)	版本 REV.	A
1	初版发行		X.XX ±0.20	比 例 SCALE		产品料号 PART NO.	XD-RG66-1414-D002RC	单位 UNITS	mm
			X.XXX ±0.10						
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°	投 影 Projection		材 料 MATERIAL		页 次 SHEET	1/1