



DUAL-IN-LINE HEADERS

SERIES 162, 862 • GULL WING SHRINK DIP HEADERS & STRIPS, SMT SOLDER TAIL

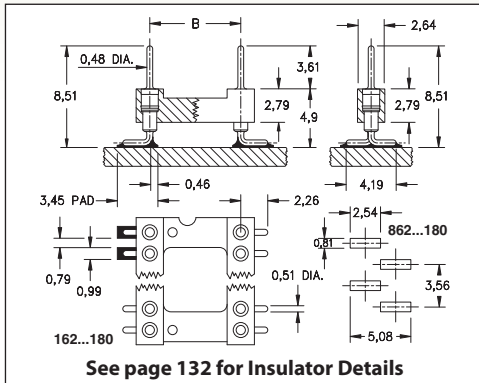

- Surface mount Gull Wing DIP headers & strips for adapters and board stacking applications with 1,78 lead spacing
- Gull wing terminals provide maximum strength and permit easy visual inspection of solder joints
- Series 162 and Series 862 use MM #6218 pins. See page 208 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations
- For Electrical, Mechanical and Environmental Data, see page 264 for details

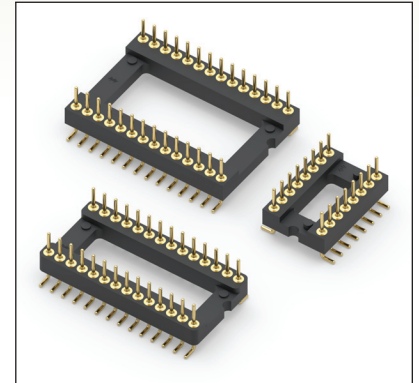

Total number of pins				Quantity per tube	ORDERING INFORMATION				
	A	B	C						
16	14,53	7,62	9,91	35	162-10-316-30-180000				
28	25,20	10,16	12,45	20	162-10-428-30-180000				
30	26,97	10,16	12,45	18	162-10-430-30-180000				
48	42,98	10,16	12,45	12	162-10-448-30-180000				
20	18,08	15,24	17,53	28	162-10-620-30-180000				
28	25,20	15,24	17,53	20	162-10-628-30-180000				
40	35,86	15,24	17,53	14	162-10-640-30-180000				
42	37,64	15,24	17,53	13	162-10-642-30-180000				
48	42,98	15,24	17,53	12	162-10-648-30-180000				
52	46,53	15,24	17,53	11	162-10-652-30-180000				
56	50,09	15,24	17,53	10	162-10-656-30-180000				
64	57,20	15,24	17,53	9	162-10-664-30-180000				
68	60,76	15,24	17,53	8	162-10-668-30-180000				
64	57,20	19,05	21,34	8	162-10-764-30-180000				
					XX=Plating Code See Below RoHS-2 2011/65/EU				
					SINGLE ROW STRIP SOCKET If desired, we will supply any length up to 21 pins.				
21	37,64	---	2,64	---	862-10-021-30-180000				
See page 264 for coplanarity information					SPECIFY PLATING CODE XX =		10		
					Pin Plating		0,25µm Au		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mill-Max:

[162-10-316-30-180000](#) [162-10-428-30-180000](#) [162-10-430-30-180000](#) [162-10-448-30-180000](#) [162-10-620-30-180000](#) [162-10-628-30-180000](#) [162-10-640-30-180000](#) [162-10-642-30-180000](#) [162-10-648-30-180000](#) [162-10-652-30-180000](#) [162-10-656-30-180000](#) [162-10-664-30-180000](#) [162-10-668-30-180000](#)