

## DIN-Power coding pin



Image is for illustration purposes only. Please refer to product description.

Part number	09 04 000 9908
Specification	DIN-Power coding pin
HARTING eCatalogue	<a href="https://b2b.harting.com/09040009908">https://b2b.harting.com/09040009908</a>

### Identification

Category	Accessories
Series	DIN 41612
Type of accessory	Coding pin
Description of the accessory	for types D, E, F, FM, 2F, MH

### Material properties

Material (accessories)	Thermoplastic
Colour (accessories)	Black
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained

### Specifications and approvals

Railway classification	F4/I3 acc. to NFF 16-101/102
------------------------	------------------------------

### Commercial data

Packaging size	100
Net weight	0.038 g
Country of origin	Germany




**Pushing Performance**  
Since 1945

## Commercial data

European customs tariff number	85389099
GTIN	5713140008182
ETIM	EC002311
eCl@ss	27440203 Coding for industrial connectors

## Coding pin

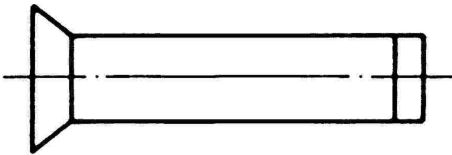

To avoid accidental and incorrect mating of adjacent connectors a coding system is required. The coding is achieved by means of a coding pin which is inserted into the selected chamber of the female connector (the contact cavity must be filled with a female contact!). The opposite male contact must be removed with the help of the specially designed tool. It's recommended to use a number of coding pins in relation to the total number of contacts per connector: 3 pins for 64 contacts, 7 pins for 160 contacts.