

## IEC Appliance Inlet C6, Snap-in Mounting, Front Side, Solder or Quick-connect Terminal



See below:

### Approvals and Compliances

#### Description

- Panel mount
- Snap-in version , Front Side
- Appliance Inlet , Pin temperature 70 °C Protection class I
- Solder / Quick Connect

#### Characteristics

- Contact pins are turned from solid material

#### Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Approvals](#), [Distributor-Stock-Check](#), [Accessories](#), [Detailed request for product](#)

#### Technical Data

|                                   |                                                                   |
|-----------------------------------|-------------------------------------------------------------------|
| Ratings IEC                       | 2.5 A / 250 VAC; 50 Hz                                            |
| Ratings UL/CSA                    | 7 A / 125 VAC; 60 Hz                                              |
| Dielectric Strength               | > 4 kVAC between L-N<br>> 2 kVAC between L/N-PE<br>(1 min/50 Hz)  |
| Allowable Operation Temperature   | -25 °C to 70 °C                                                   |
| IP-Protection                     | front side IP20 acc. to IEC 60529                                 |
| Protection against electric shock | Suitable for appliances with protection class I acc. to IEC 61140 |
| Panel Thickness S                 | Snap-in version<br>1/1.5/2/2/2.5 mm                               |
| Material: Housing                 | PA6, black, UL 94V-0                                              |

|                         |                                                                                                                                          |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Appliance inlet/-outlet | C6 acc. to IEC/EN 60320-1<br>UL 60320-1, CSA C22.2 no. 60320-1<br>(for cold conditions) pin-temperature 70 °C, 2.5 A, Protection Class I |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------|

### Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

#### Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: 2565

| Approval Logo | Certificates                  | Certification Body | Description                      |
|---------------|-------------------------------|--------------------|----------------------------------|
|               | <a href="#">VDE Approvals</a> | VDE                | VDE Certificate Number: 40002273 |
|               | <a href="#">UL Approvals</a>  | UL                 | UR File Number: E96454           |
|               | <a href="#">CSA Approvals</a> | CSA                | CSA Certification Record: 27324  |

## Product standards

Product standards that are referenced

| Organization                                                                     | Design                | Standard              | Description                                                           |
|----------------------------------------------------------------------------------|-----------------------|-----------------------|-----------------------------------------------------------------------|
|  | Designed according to | IEC/EN 60320-1        | Appliance couplers for household and similar general purposes         |
|  | Designed according to | UL 60320-1            | Standard for Attachment Plugs and Receptacles                         |
|  | Designed according to | CSA C22.2 no. 60320-1 | General Use Receptacles, Attachment Plugs, and Similar Wiring Devices |

## Application standards

Application standards where the product can be used





| Organization                                                                     | Design                         | Standard       | Description                                                                                   |
|----------------------------------------------------------------------------------|--------------------------------|----------------|-----------------------------------------------------------------------------------------------|
|  | Suitable for applications acc. | IEC/UL 62368-1 | Audio/video, information and communication technology equipment - Part 1: Safety requirements |

## Compliances

The product complies with following Guide Lines

| Identification                                                                     | Details                                        | Initiator   | Description                                                                                                                                                                                           |
|------------------------------------------------------------------------------------|------------------------------------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | <a href="#">CE declaration of conformity</a>   | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008. |
|    | <a href="#">UKCA declaration of conformity</a> | SCHURTER AG | The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.                                                  |
|    | RoHS                                           | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863                                                                                                                                                    |
|   | China RoHS                                     | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.                                                                                  |
|  | REACH                                          | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.                               |

## Dimensions [mm]

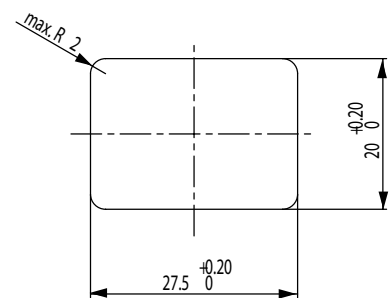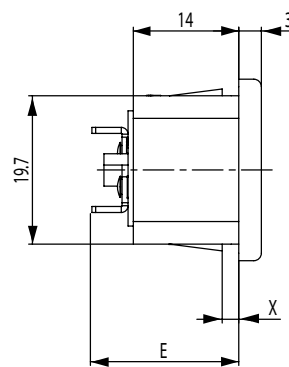

Panel thickness:  
X= 1.0 / 1.5 / 2.0 / 2.5 / 3.0 mm

E = Solder terminal short 19.70 mm  
E = Solder terminal long 23.40 mm  
E = QC terminal 2.8x0.2mm 25.70 mm  
E = QC terminal 4.8x0.2mm 24.20 mm

Length of the terminal please find at the order code configuration table

Dimension "S" please ref. to table order code

## Config. Code

2565 - H - A B C 0 - D - E G

The characters are placeholders for the correspondingly keys of selections from the key tables.

2565 - **H** - A B C 0 - D - E G = Type

| Type               | Configuration key |
|--------------------|-------------------|
| protection class I | X                 |

2565 - H - **A** B C 0 - D - E G = Terminals

| Terminal L                         |                                                                                     | Configuration key |
|------------------------------------|-------------------------------------------------------------------------------------|-------------------|
| short solder terminal (L = 4.8 mm) |    | 2                 |
| long solder terminal (L = 8.5 mm)  |    | 3                 |
| Blade terminal (2.8 x 0.8 mm)      |    | 7                 |
| PCB-terminal (standard)            |   | A                 |
| PCB-terminal (short)               |  | B                 |
| PCB-terminal (long)                |  | C                 |

2565 - H - A **B** C 0 - D - E G = Terminals

| Terminal N                         | Configuration key |
|------------------------------------|-------------------|
| short solder terminal (L = 4.8 mm) | 2                 |
| long solder terminal (L = 8.5 mm)  | 3                 |
| Blade terminal (2.8 x 0.8 mm)      | 7                 |
| PCB-terminal (standard)            | A                 |

Symbols similar as in table A

| Terminal N                    | Configuration key |
|-------------------------------|-------------------|
| PCB-terminal (short)          | B                 |
| PCB-terminal (long)           | C                 |
| Symbols similar as in table A |                   |

2565 - H - A B **C** 0 - D - E G = Terminals

| Terminal Ground                    | Configuration key |
|------------------------------------|-------------------|
| short solder terminal (L = 4.8 mm) | 2                 |
| long solder terminal (L = 8.5 mm)  | 3                 |
| Blade terminal (2.8 x 0.8 mm)      | 7                 |

Symbols similar as in table A

2565 - H - A B C 0 - **D** - E G = Color

| Color | Configuration key |
|-------|-------------------|
| Black | A                 |

2565 - H - A B C 0 - D - **E** G = Style

| Style                       | Configuration key |
|-----------------------------|-------------------|
| snap-in (s=panel thickness) | 4                 |

2565 - H - A B C 0 - D - E **G** = Dimension S

| Dimension "S" | Configuration key |
|---------------|-------------------|
| 10            |                   |
| 15            |                   |
| 20            |                   |
| 25            |                   |

The dimension "S" is displayed in (1/10 mm). This information is also valid for the order code

## All Variants

| Terminals L / N                    | Terminal Ground                    | Panel Thickness s [1/10 mm] | Config. Code      | Order Number |
|------------------------------------|------------------------------------|-----------------------------|-------------------|--------------|
| Blade terminal (2.8 x 0.8 mm)      | Blade terminal (2.8 x 0.8 mm)      | 20                          | 2565-X-7770-A-420 | 6160.0040    |
| short solder terminal (L = 4.8 mm) | short solder terminal (L = 4.8 mm) | 20                          | 2565-X-2220-A-420 | 6163.0015    |
| short solder terminal (L = 4.8 mm) | short solder terminal (L = 4.8 mm) | 25                          | 2565-X-2220-A-425 | 6163.0021    |

The listed variants should be available from stock. Other versions on request [www.schurter.com/contact](https://www.schurter.com/contact)

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

## Packaging unit

50 Pcs

Mating Outlets/Connectors

Category / Description



[Power Supply Cord Overview complete](#)

Cord Sets 2.5 A, Europlug, 2.0 m, Connector IEC C5, H05VV-F3G0.75, black

6052.0042