


X-Lok Connector




Range Overview


Receptacle to Overmolded with Cable

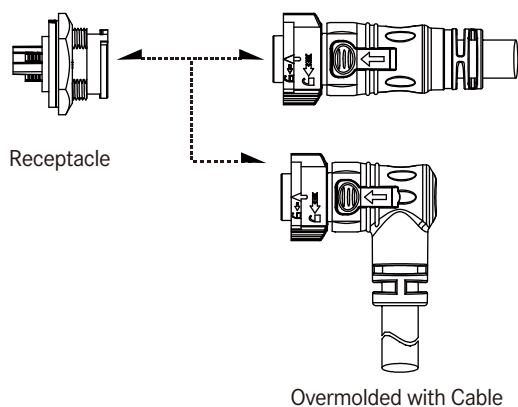


In Line

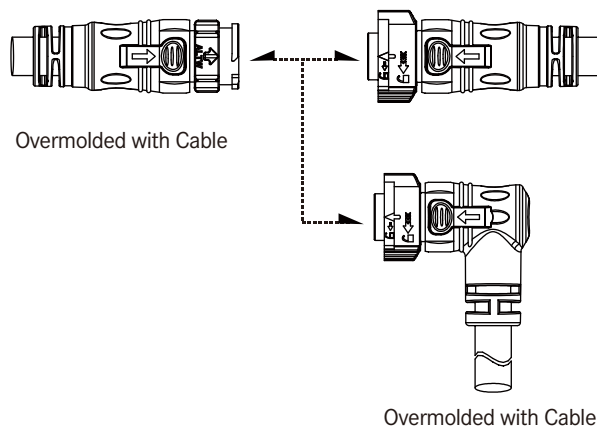

Accessories



Waterproof Cap



Waterproof Cap with
Fishe Line / Rubber Lead

Specification

Identifications	Power Group (B,C,D size) Data Group (B,C,D size) Hybrid Group (B,C,D size)
Description	Receptacle Overmolded with Cable Field Installable (Upon Request)
Current Rating / Data	B size (5A, 10A, 10A+5A) C size (5A, 10A, 20A, 10A+5A) D size (5A, 20A, 20A+5A)
Material	Contacts: Copper Alloy, Gold Plated Connector Body (Housing) : Nylon+GF, UL Recognized Gasket & O-ring: Rubber, UL Recognized
Waterproof Rating	IP68
Temperature Range	Receptacle: -40°C~105°C Overmolded With Cable: • Data Group: -20°C~80°C • Power Group:-20°C~105°C • Hybrid Group:-40°C~105°C
Contact Resistance	≤ 10mΩ
Insulation Resistance	≥ 100MΩ at DC500V
Durability	1000 cycles
Breakdown Voltage	≥ 1000 V plus 2 times the rated voltage
More to know	Salt Spray Corrosion: 48H Standard Cable Length: 01~99M

【Note】 Design and specification are subject to change without notice.


Ordering Information

Specification / Current Rating			1	2	3	4	5	6	7	8	9	10
<u>>Standard Size</u>	<u>>Middle Size</u>	<u>>Large Size</u>										
(BD) 5A	(CD) 5A	(DD) 5A										
(BB) 10A	(CB) 10A	(DC) 20A										
(BBD) 10A+5A	(CC) 20A	(DCD) 20A+5A										
	(CBD) 10A+5A											
Number of Contacts												
02, 03....												
EX. (02) = 2 Contacts												
Connector Body (Style)												
<u>> For Receptacle</u>												
(P)Front Fastened	<u>> For Overmolded with Cable</u>											
(R)Rear Fastened	(A)With Strain Relief											
Connector (Housing) Gender												
(M) Male Connector	(F) Female Connector											
Contact Gender												
(M) Male												
(F) Female												
Assemble Style												
<u>> For Receptacle</u>												
(S) Solder Type	<u>> For Overmolded with Cable</u>											
(B) Screw in Type	(M) Overmolded with Cable											
Mating Style												
(Q) Push Lock												
Backshell												
<u>> For Receptacle</u>												
(C) Circular	<u>> For Overmolded with Cable</u>											
(S) Square	(L) Straight											
	(R) Right Angle											
Waterproof Rating												
(8) IP 68												
More Information												
(W00&W0P) Similar Standard												
For US & EU Spec												
<u>> For Overmolded with Cable</u>												
(□)+(■) : Cable Type + Cable Length												
EX.(A01) = UL2464 Cable + 1M												
<u>> For Receptacle</u>												
(001), (002)	<u>(□) : Cable Type</u>	<u>(■) : Cable Length</u>										
Without Cable : Different	(A) UL2464 Cable - Upon request	From 1M to 99M										
Versions	(D) UL21388 Cable - Data Group	EX. (01) = 1M										
(00P) For Power Group	(E) UL SJTW Cable - Power Group											
	(F) UL21996 Cable - Hybrid Group											


Physical Dimension | Data Group

Receptacle

Panel Cut-out




Front Fastened

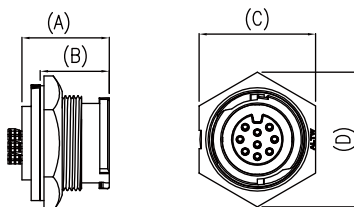


Size	Current Rating (Code)	L	OD	A	B	C	D	Pannel Thickness Max.
B	5A (BD)	14.8	15.6	18.8	14.0	20.6	23.7	4
	10A (BB)							
C	5A (CD)	19.4	20.8	19.0	15.0	25.4	29.3	4.2
	10A (CB)							
D	5A (DD)	23.6	25.6	18.0	14.9	28.6	33.0	3.6

Unit: mm

Panel Cut-out



Rear Fastened

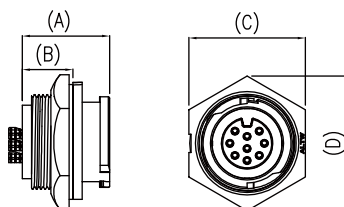


Size	Current Rating (Code)	L	OD	A	B	C	D	Panel Thickness Max.
B	5A (BD)	14.8	15.6	18.6	10.8	20.6	23.7	4.5
	10A (BB)							
C	5A (CD)	19.4	20.8	19.0	11.0	25.4	29.3	4.2
	10A (CB)							
D	5A (DD)	23.6	25.6	18.0	14.9	28.6	33.0	3.6

Unit: mm

【Note】 Design and specification are subject to change without notice.

Overmolded With Cable

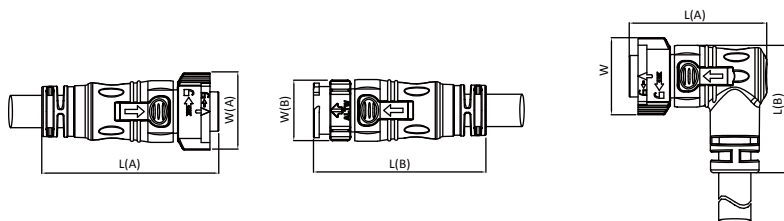


Size	Current Rating (Code)	Straight Style				Right Angle Style		
		L		W		L(A)	L(B)	W
		Female (A)	Male (B)	Female (A)	Male (B)	Female		
B	5A (BD)	53.4	53.0	25.0	20.1	45.2	34.5	25.0
	10A (BB)							
C	5A (CD)	64.2	62.7	28.0	22.4	50.0	46.2	28.0
	10A (CB)							
D	5A (DD)	62.4	61.8	36.0	27.0	63.0	49.5	36.0

Unit: mm


Physical Dimension | Power Group

Receptacle

Panel Cut-out



Front Fastened

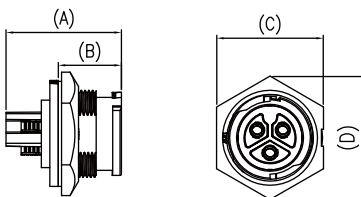


Size	Current Rating (Code)	L	OD	A	B	C	D	Panel Thickness Max.
B	5A (BD)	14.8	15.6	18.8	14.0	20.6	23.7	4
	10A (BB)							
C	20A (CC)	19.4	20.8	27.4	15.0	25.4	29.3	4.2
D	20A (DC)	23.6	25.6	26.3	14.9	28.6	33.0	3.6


Unit: mm

Receptacle

Panel Cut-out




Rear Fastened

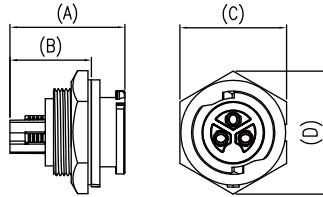

Size	Current Rating (Code)	L	OD	A	B	C	D	Panel Thickness Max.
B	5A (BD)	14.8	15.6	18.6	10.8	20.6	23.7	4.5
	10A (BB)							
C	20A (CC)	19.4	20.8	27.4	19.4	25.4	29.3	4.2
D	20A (DC)	23.6	25.6	26.3	18.1	28.6	33.0	3.6

Unit: mm

Overmolded With Cable

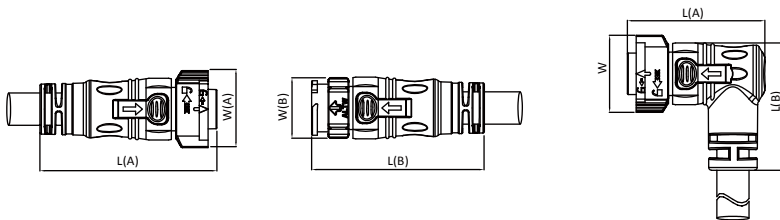

Size	Current Rating (Code)	Straight Style				Right Angle Style		
		L		W		L(A)	L(B)	W
		Female (A)	Male (B)	Female (A)	Male (B)	Female		
B	5A (BD)	53.4	53.0	25.0	20.1	45.2	34.5	25.0
	10A (BB)							
C	20A (CC)	64.1	62.7	28.0	22.4	50.0	46.2	28.0
D	20A (DC)	62.4	61.8	36.0	27.0	63.0	49.5	36.0


Unit: mm

【Note】 Design and specification are subject to change without notice.


Physical Dimension | Hybrid Group

Receptacle

Panel Cut-out



Front Fastened

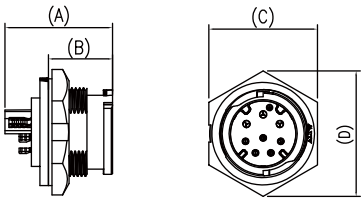


Size	Current Rating (Code)	L	OD	A	B	C	D	Pannel Thickness Max.
B	10A+5A (BBD)	14.8	15.6	26.0	14.0	20.6	23.7	4
C	10A+5A (CBD)	19.4	20.8	25.2	15.0	25.4	29.3	4.2
D	20A+5A (DCD)	23.6	25.6	24.1	14.9	28.6	33.0	3.6


Unit: mm

Receptacle

Panel Cut-out




Front Fastened

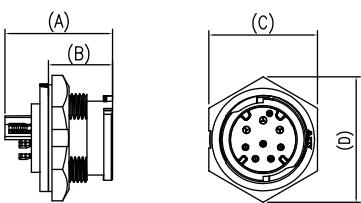

Size	Current Rating (Code)	L	OD	A	B	C	D	Pannel Thickness Max.
B	10A+5A (BBD)	14.8	15.6	24.9	17.0	20.6	23.7	4.5
C	10A+5A (CBD)	19.4	20.8	25.2	17.2	25.4	29.3	4.2
D	20A+5A (DCD)	23.6	25.6	24.1	15.9	28.6	33.0	3.6

Unit: mm

└ Overmolded With Cable

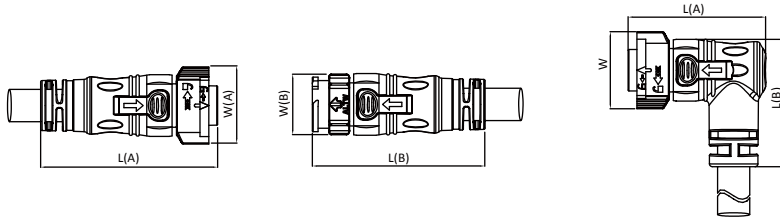

Size	Current Rating (Code)	Straight Style				Right Angle Style		
		L		W		L(A)	L(B)	W
		Female (A)	Male (B)	Female (A)	Male (B)	Female		
B	10A+5A (BBD)	53.4	53.0	25.0	20.1	45.2	34.5	25.0
C	10A+5A (CBD)	64.2	62.7	28.0	22.4	50.0	46.2	28.0
D	20A+5A (DCD)	62.4	61.8	36.0	27.0	63.0	49.5	36.0

Unit: mm

Contact Configuration

	Standard Size (B)						Middle Size (C)					
	Data / Power				Hybrid		Data				Power	
	5A(BD)		10A(BB)		10A + 5A(BBD)		5A(CD)		10A(CB)		20A(CC)	
	MM or FF	MF or FM	MM or FF	MF or FM	MM or FF	MF or FM	MM or FF	MF or FM	MM or FF	MF or FM	MM or FF	MF or FM
2 Pin (02)												
	R C	R C	R C	R C							R C	R C
3 Pin (03)												
	R C	R C	R C	R C	R C	R C					R C	R C
4 Pin (04)												
	R C	R C	R C		R C	R C			R C	R C		
5 Pin (05)												
	R C	R C			R C	R C			R C	R C		
6 Pin (06)												
	R C	R C			R C	R C			R C			
7 Pin (07)												
	R C						R C	R C				
8 Pin (08)												
	R C						R C	R C				
9 Pin (09)												
							R C	R C				
10 Pin (10)												
							R C	R C				
11 Pin (11)												
12 Pin (12)												
							R C					
14 Pin (14)												
18 Pin (18)												

X-Lok Connector | Contact Configuration

Standard Size (5A | 10A | 10A+5A) | Middle Size (5A | 10A | 20A | 10A+5A) | Large Size (5A | 20A | 20A+5A)

		Large Size (D)							
Hybrid		Data		Power		Hybrid			
10A + 5A(CBD)		5A(DD)		20A(DC)		20A + 5A(DCD)			
MM or FF	MF or FM	MM or FF	MF or FM	MM or FF	MF or FM	MM or FF	MF or FM	MM or FF	MF or FM
				R C	R C				
				R C	R C				
R C	R C							R C	R C
R C	R C							R C	R C
R C	R C							R C	R C
R C	R C							R C	R C
R C	R C							R C	R C
R C	R C							R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C
								R C	R C

Find Our Standard Products

Standard Size: 5/8"-27 UNS > In-line

- Male Connector (Housing) - Male Contacts - Push Lock			Overmolded with Cable	Overmolded with Cable
Group	Current Rating (Code)	Contacts ②	Male Connector (M) Male Contacts (M)	Female Connector (F) Female Contacts (F)
Data	5A (BD)	02,03,04, 05,06,07,08	BD- ② AMMM-QL8DXX*	BD- ② AFFM-QL8DXX* BD- ② AFFM-QR8DXX*
	10A (BB)	02,03,04	BB- ② AMMM-QL8DXX*	BB- ② AFFM-QL8DXX* BB- ② AFFM-QR8DXX*
Power	5A (BD)	03	BD-03AMMM-QL8EXX*	BD-03AFFM-QL8EXX* BD-03AFFM-QR8EXX*
	10A (BB)	02,03,04	BB- ② AMMM-QL8EXX*	BB- ② AFFM-QL8EXX* BB- ② AFFM-QR8EXX*
Hybrid	10A+5A (BBD)	06	BBD-06AMMM-QL8FXX*	BBD-06AFFM-QL8FXX* BBD-06AFFM-QR8FXX*



*XX: Choose the cable length from 01-99 m

Standard Size: 5/8"-27 UNS > In-line

- Male Connector (Housing) - Female Contacts - Push Lock			Overmolded with Cable	Overmolded with Cable
Group	Current Rating (Code)	Contacts ②	Male Connector (M) Female Contacts (F)	Female Connector (F) Male Contacts (M)
Data	5A (BD)	02,03,04, 05,06	BD- ② AMFM-QL8DXX*	BD- ② AFMM-QL8DXX* BD- ② AFMM-QR8DXX*
	10A (BB)	02,03	BB- ② AMFM-QL8DXX*	BB- ② AFMM-QL8DXX* BB- ② AFMM-QR8DXX*
Power	5A (BD)	03	BD-03AMFM-QL8EXX*	BD-03AFMM-QL8EXX* BD-03AFMM-QR8EXX*
	10A (BB)	02,03	BB- ② AMFM-QL8EXX*	BB- ② AFMM-QL8EXX* BB- ② AFMM-QR8EXX*
Hybrid	10A+5A (BBD)	06	BBD-06AMMM-QL8FXX*	BBD-06AFMM-QL8FXX* BBD-06AFMM-QR8FXX*



*XX: Choose the cable length from 01-99 m

Standard Size: 5/8"-27 UNS > Receptacle and Mating Pair

- Male Connector (Housing) - Male Contacts - Push Lock			Receptacle 	Overmolded with Cable 
Group	Current Rating (Code)	Contacts ②	Male Connector (M) Male Contacts (M)	Female Connector (F) Female Contacts (F)
Data	5A (BD)	02,03,04, 05,06,07,08	BD- ② PMMS-QC8001 BD- ② RMMS-QC8001	BD- ② AFFM-QL8DXX* BD- ② AFFM-QR8DXX*
	10A (BB)	02,03,04	BB- ② PMMS-QC8001 BB- ② RMMS-QC8001	BB- ② AFFM-QL8DXX* BB- ② AFFM-QR8DXX*
Power	5A (BD)	03	BD-03PMMS-QC8001P BD-03RMMS-QC8001P	BD-03AFFM-QL8EXX* BD-03AFFM-QR8EXX*
	10A (BB)	02,03,04	BB- ② PMMS-QC8001P BB- ② RMMS-QC8001P	BB- ② AFFM-QL8EXX* BB- ② AFFM-QL8RXX*
Hybrid	10A+5A (BBD)	06	BBD-06PMMS-QC8001 BBD-06RMMS-QC8001	BBD-06AFFM-QL8FXX* BBD-06AFFM-QR8FXX*

*XX: Choose the cable length from 01-99 m



Standard Size: 5/8"-27 UNS > Receptacle and Mating Pair

- Male Connector (Housing) - Male Contacts - Push Lock			Receptacle 	Overmolded with Cable 
Group	Current Rating (Code)	Contacts ②	Male Connector (M) Female Contacts (F)	Female Connector (F) Male Contacts (M)
Data	5A (BD)	02,03,04, 05,06,07,08	BD- ② PMMS-QC8001 BD- ② RMMS-QC8001	BD- ② AFFM-QL8DXX* BD- ② AFFM-QR8DXX*
	10A (BB)	02,03,04	BB- ② PMMS-QC8001 BB- ② RMMS-QC8001	BB- ② AFFM-QL8DXX* BB- ② AFFM-QR8DXX*
Power	5A (BD)	03	BD-03PMMS-QC8001P BD-03RMMS-QC8001P	BD-03AFFM-QL8EXX* BD-03AFFM-QR8EXX*
	10A (BB)	02,03,04	BB- ② PMMS-QC8001P BB- ② RMMS-QC8001P	BB- ② AFFM-QL8EXX* BB- ② AFFM-QL8RXX*
Hybrid	10A+5A (BBD)	06	BBD-06PMFS-QC8001 BBD-06RMFS-QC8001	BBD-06AFMM-QL8FXX* BBD-06AFMM-QR8FXX*

*XX: Choose the cable length from 01-99 m



【Note】 Design and specification are subject to change without notice.

Middle Size 13/16"-28UNS > In Line

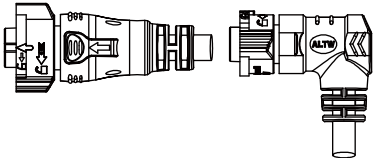• Male Connector (Housing) • Male Contacts • Push Lock			Overmolded with Cable 	Overmolded with Cable 
Group	Current Rating (Code)	Contacts ²	Male Connector (M) Male Contacts (M)	Female Connector (F) Female Contacts (F)
Data	5A (CD)	08,09,10,12	CD- ² AMMM-QL8DXX*	CD- ² AFFM-QL8DXX* CD- ² AFFM-QR8DXX*
	10A (CB)	04,05,06	CB- ² AMMM-QL8DXX*	CB- ² AFFM-QL8DXX*
Power	20A (CC)	02,03	BD-03AMMM-QL8EXX*	CD- ² AFFM-QL8DXX* CD- ² AFFM-QR8DXX*
Hybrid	10A+5A (CBD)	08	CBD-08AMMM-QL8FXX*	CBD-08AFFM-QL8FXX* CBD-08AFFM-QR8FXX*




*XX: Choose the cable length from 01-99 m

Middle Size 13/16"-28UNS > In Line

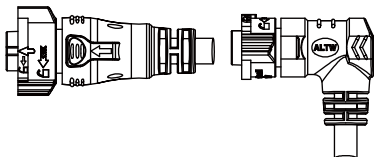• Male Connector (Housing) • Male Contacts • Push Lock			Overmolded with Cable 	Overmolded with Cable 
Group	Current Rating (Code)	Contacts ²	Male Connector (M) Female Contacts (F)	Female Connector (F) Male Contacts (M)
Data	5A (CD)	08,09,10,12	CD- ² AMMM-QL8DXX*	CD- ² AFFM-QL8DXX* CD- ² AFFM-QR8DXX*
	10A (CB)	04,05,06	CB- ² AMMM-QL8DXX*	CB- ² AFFM-QL8DXX*
Power	20A (CC)	02,03	BD-03AMMM-QL8EXX*	CD- ² AFFM-QL8DXX* CD- ² AFFM-QR8DXX*
Hybrid	10A+5A (CBD)	08	CBD-08AMMM-QL8FXX*	CBD-08AFFM-QL8FXX* CBD-08AFFM-QR8FXX*




*XX: Choose the cable length from 01-99 m

Middle Size 13/16"-28UNS > Receptacle and Mating Pair

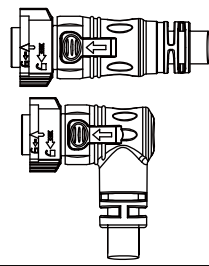• Male Connector (Housing) • Female Contacts • Push Lock			Receptacle  	Overmolded with Cable 
Group	Current Rating (Code)	Contacts 	Male Connector (M) Male Contacts (M)	Female Connector (F) Female Contacts (F)
Data	5A (CD)	08,09,10,12	CD-  PMMS-QC8001 CD-  RMMS-QC8001	CD-  AFFM-QL8DXX* CD-  AFFM-QR8DXX*
	10A (CB)	04,05,06	CB-  PMMS-QC8001 CB-  RMMS-QC8001	CB-  AFFM-QL8DXX* CB-  AFFM-QR8DXX*
Power	20A (CC)	02,03	CC-  PMMS-QC8001P CC-  RMMS-QC8001P	CC-  AFFM-QL8EXX* CC-  AFFM-QR8EXX*
Hybrid	10A+5A (CBD)	08	CBD-08PMMS-QC8001 CBD-08RMMS-QC8001	CBD-08AFFM-QL8FXX* CBD-08AFFM-QR8FXX*

*XX: Choose the cable length from 01-99 m



Middle Size 13/16"-28UNS > Receptacle and Mating Pair

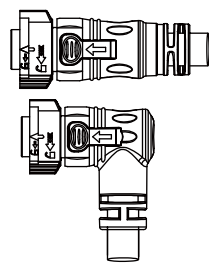• Male Connector (Housing) • Female Contacts • Push Lock			Receptacle  	Overmolded with Cable 
Group	Current Rating (Code)	Contacts 	Male Connector (M) Female Contacts (F)	Female Connector (F) Male Contacts (M)
Data	5A (CD)	08,09,10,12	CD-  PMMS-QC8001 CD-  RMMS-QC8001	CD-  AFMM-QL8DXX* CD-  AFMM-QL8DXX*
	10A (CB)	04,05,06	CB-  PMMS-QC8001 CB-  RMMS-QC8001	CB-  AFFM-QL8DXX*
Power	20A (CC)	02,03	CC-  PMMS-QC8001P CC-  RMMS-QC8001P	CC-  AFMM-QL8EXX* CC-  AFMM-QL8EXX*
Hybrid	10A+5A (CBD)	08	CBD-08PMFS-QC8001 CBD-08RMFS-QC8001	CBD-08AFMM-QL8FXX* CBD-08AFMM-QR8FXX*

*XX: Choose the cable length from 01-99 m



【Note】 Design and specification are subject to change without notice.

$\searrow$ Large Size 1"-20UNEF > In Line

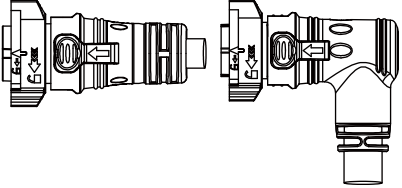• Male Connector (Housing) • Male Contacts • Push Lock			Overmolded with Cable 	Overmolded with Cable 
Group	Current Rating (Code)	Contacts ²	Male Connector (M) Male Contacts (M)	Female Connector (F) Female Contacts (F)
Data	5A (DD)	14, 18	DD- ² AMMM-QL8DXX*	DD- ² AFFM-QL8DXX* DD- ² AFFM-QR8DXX*
Power	20A (DC)	02,03,05	DC- ² AMMM-QL8EXX*	DC- ² AFFM-QL8EXX* DC- ² AFFM-QR8EXX*
Hybridwer	20A+5A (DCD)	12	DCD-12AMMM-QL8FXX*	DCD-12AFFM-QL8FXX* DCD-12AFFM-QR8FXX*


*XX: Choose the cable length from 01-99 m

$\searrow$ Large Size 1"-20UNEF > In Line

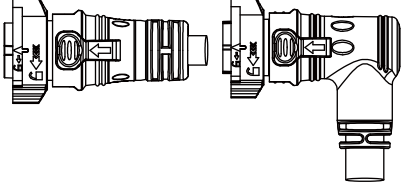• Male Connector (Housing) • Male Contacts • Push Lock			Overmolded with Cable 	Overmolded with Cable 
Group	Current Rating (Code)	Contacts ²	Male Connector (M) Female Contacts (F)	Female Connector (F) Male Contacts (M)
Data	5A (DD)	14, 18	DD- ² AMMM-QL8DXX*	DD- ² AFFM-QL8DXX* DD- ² AFFM-QR8DXX*
Power	20A (DC)	02,03,05	DC- ² AMMM-QL8EXX*	DC- ² AFFM-QL8EXX* DC- ² AFFM-QR8EXX*
Hybridwer	20A+5A (DCD)	12	DCD-12AMFM-QL8FXX*	DCD-12AFMM-QL8FXX* DCD-12AFMM-QR8FXX*




*XX: Choose the cable length from 01-99 m

Large Size 1"-20UNEF > Receptacle and Mating Pair

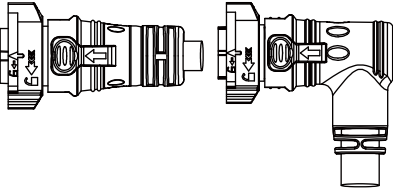• Male Connector (Housing) • Male Contacts • Push Lock			Receptacle Front Fastened Rear Fastened	Overmolded with Cable 
Group	Current Rating (Code)	Contacts 2	Male Connector (M) Male Contacts (M)	Female Connector (F) Female Contacts (F)
Data	5A (DD)	14,18	DD- 2 PMMS-QC8001 DD- 2 RMMS-QC8001	DD- 2 AFFM-QL8DXX* DD-18AFFM-QR8DXX*
Power	20A (DC)	02,03,05	DD- 2 PMMS-QC8001P DD- 2 RMMS-QC8001P	DC- 2 AFFM-QL8EXX* DC- 2 AFFM-QR8EXX*
Hybrid	20A+5A (DCD)	12	DCD-12PMMS-QC8001 DCD-12RMMS-QC8001	DCD-12AFFM-QL8FXX* DCD-12AFFM-QR8FXX*

*XX: Choose the cable length from 01-99 m


Large Size 1"-20UNEF > Receptacle and Mating Pair

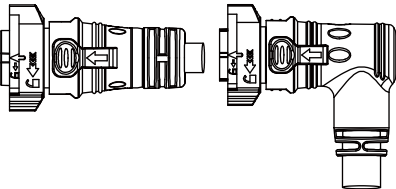• Male Connector (Housing) • Male Contacts • Push Lock			Receptacle Front Fastened  Rear Fastened 	Overmolded with Cable 
Group	Current Rating (Code)	Contacts 2	Male Connector (M) Female Contacts (F)	Female Connector (F) Male Contacts (M)
Data	5A (DD)	14, 18	DD- 2 PMFS-QC8001 DD- 2 RMFS-QC8001	DD- 2 AFFM-QL8DXX* DD-18AFFM-QR8DXX*
Power	20A (DC)	02,03,05	DD- 2 PMFS-QC8001P DD- 2 RMFS-QC8001P	DC- 2 AFFM-QL8EXX* DC- 2 AFFM-QR8EXX*
Hybrid	20A+5A (DCD)	12	DCD-12PMFS-QC8001 DCD-12RMFS-QC8001	DCD-12AFMM-QL8FXX* DCD-12AFMM-QR8FXX*



*XX: Choose the cable length from 01-99 m

【Note】 Design and specification are subject to change without notice.


Accessories > Waterproof Cap



For female connector



For male connector



- 3 More to choose: None (MA) / With Rubber Lead (PC)
4 More to choose: None (MA) / With Fish Line (CD)
5 More to choose: None (A) / With Fish Line (D)

Size	Mating Pair	Mating Style	Mating Pair (Gender)	P/N
Standard Size 5/8"-27 UNS	Receptacle	Push Lock	Male	CAP-WABMQ 3 1
	Overmolded with cable	Push Lock	Female	CAP-WABFQ 4 1
			Male	CAP-WABMQM 5 1
Middle Size 13/16"-28 UNS	Receptacle	Push Lock	Male	CAP-WACMQ 3 1
	Overmolded with cable	Push Lock	Female	CAP-WACFQ 4 1
			Male	CAP-WACMQM 5 1
Large Size 1/20" UNEF	Receptacle	Push Lock	Male	CAP-WADMQ 3 1 CAP-WADMQ 3 2
	Overmolded with cable	Push Lock	Female	CAP-WADFQ 4 1
			Male	CAP-WADMQM 5 1 CAP-WADMQM 5 2