

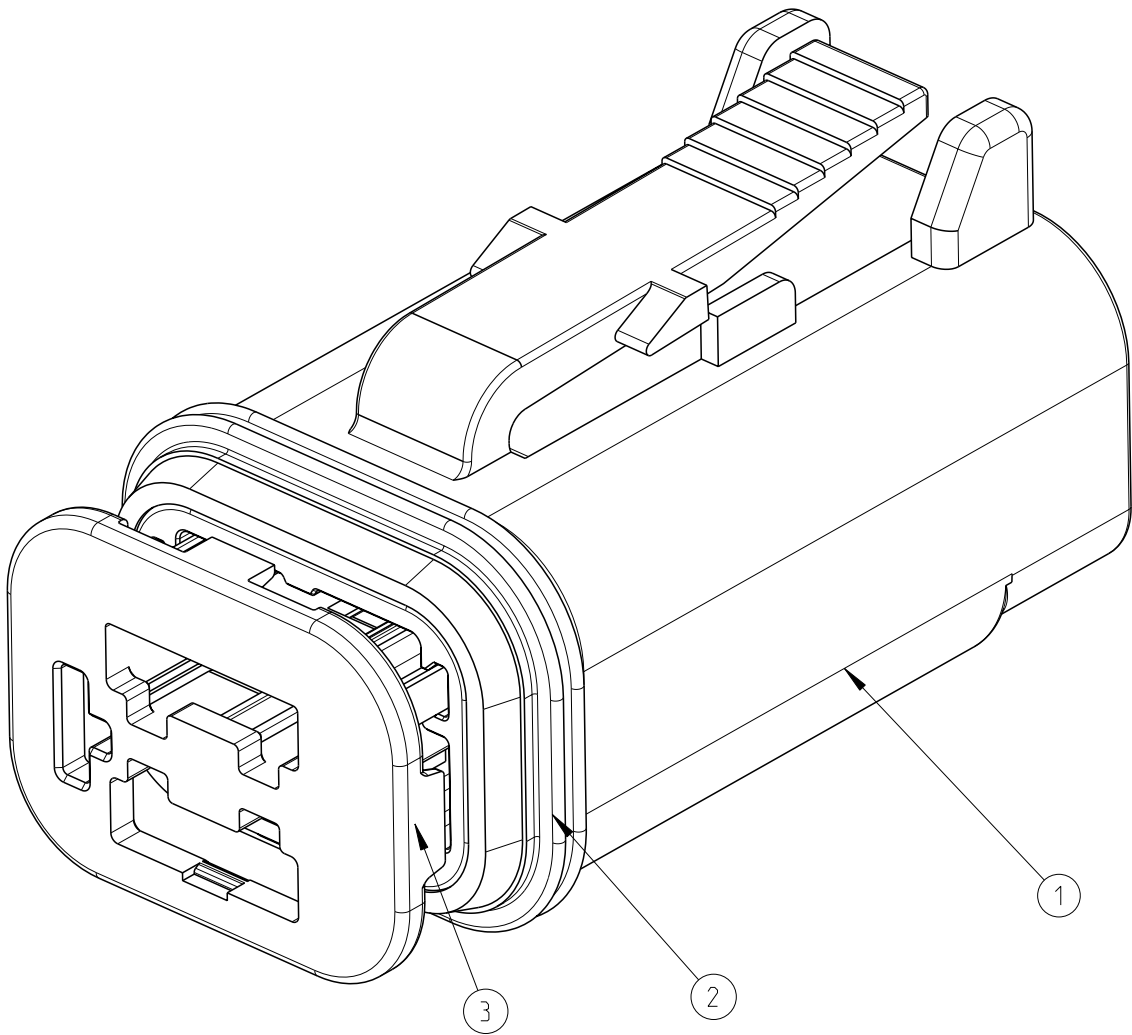
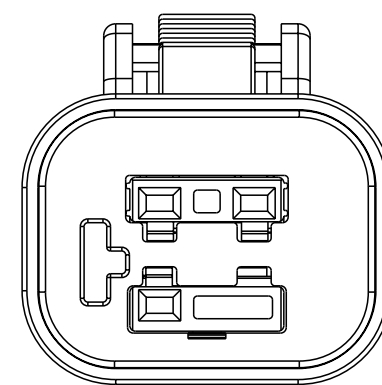
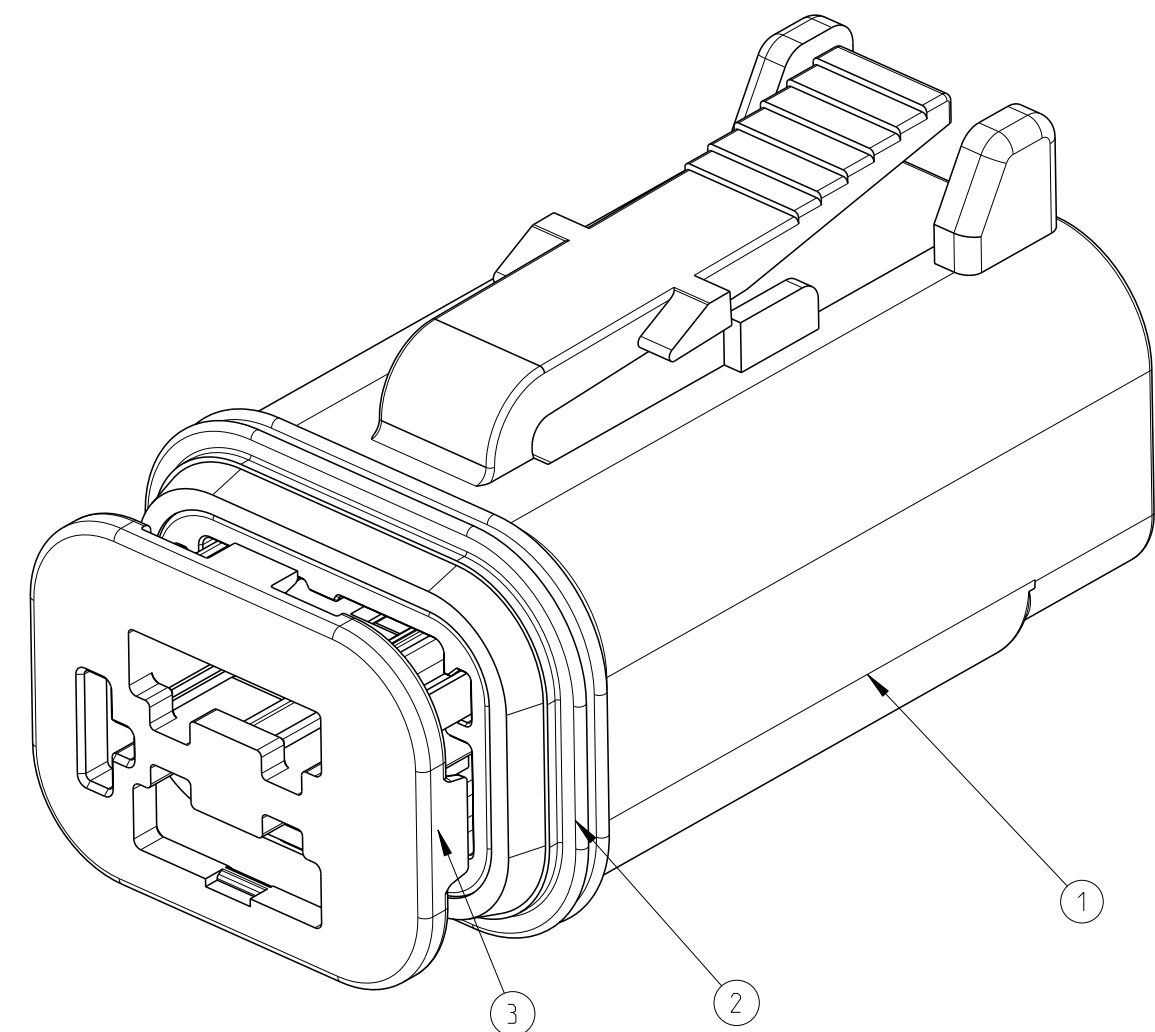
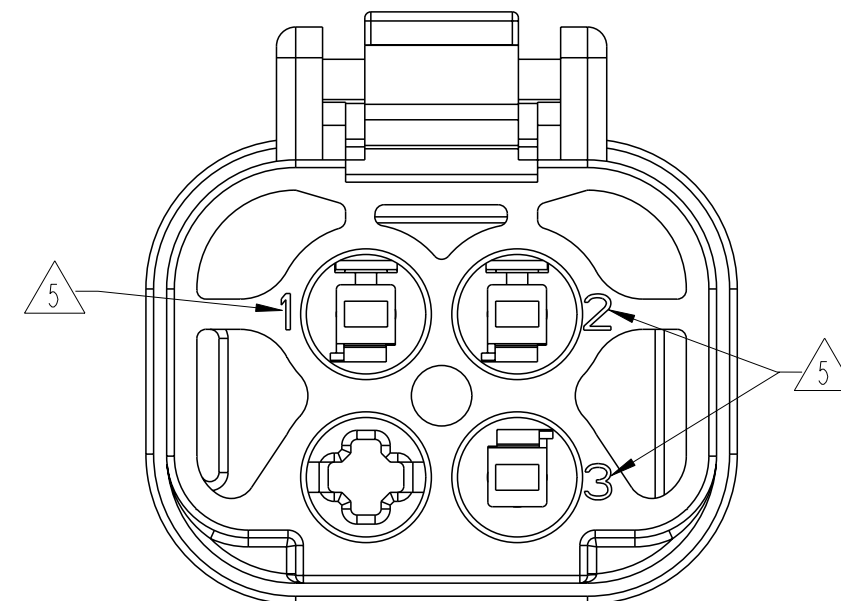
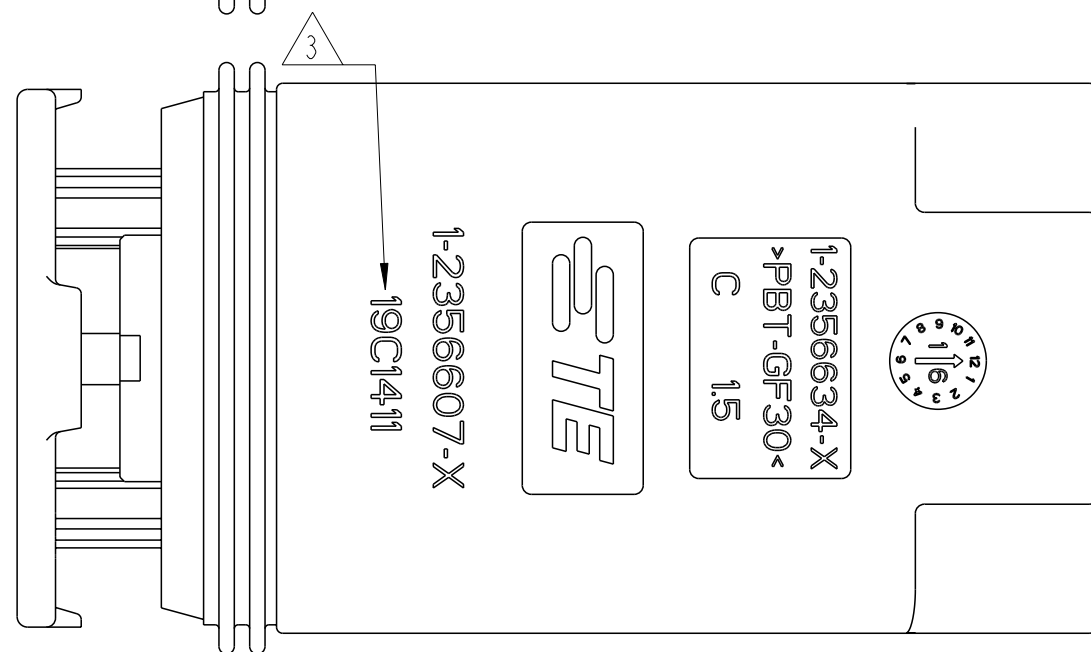
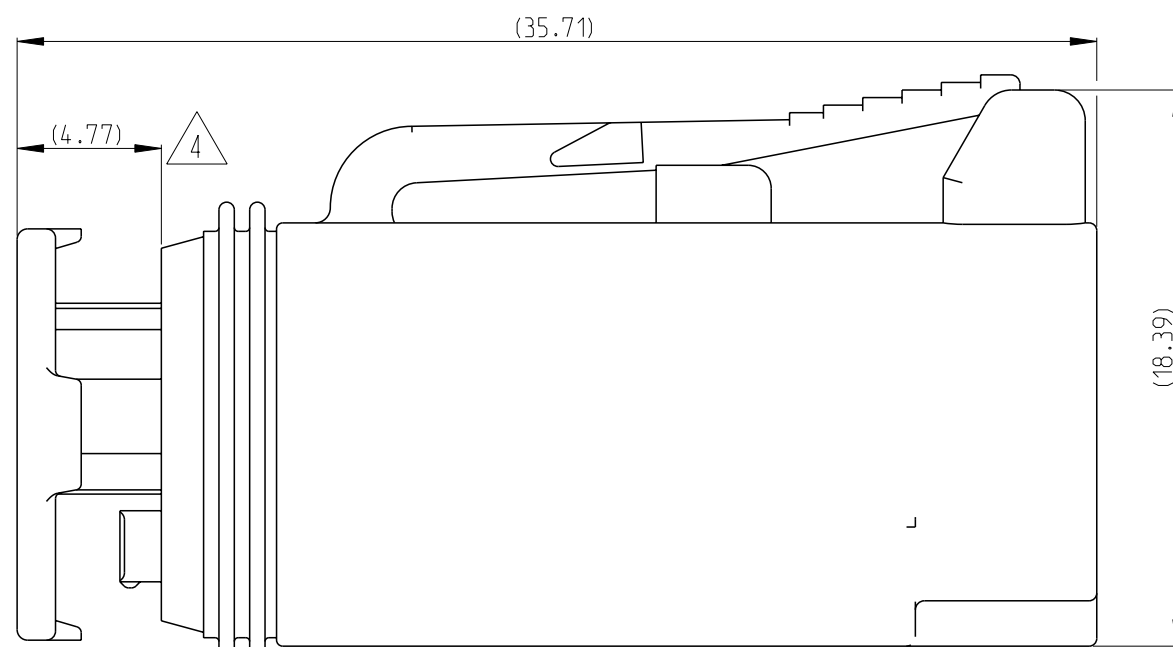


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	18SEP2019	V.T	I.Y
	B	ECR-20-004362	10APR2020	V.T	E.J
	C	ECR-20-015258	01JUN2021	V.T	Z.Z

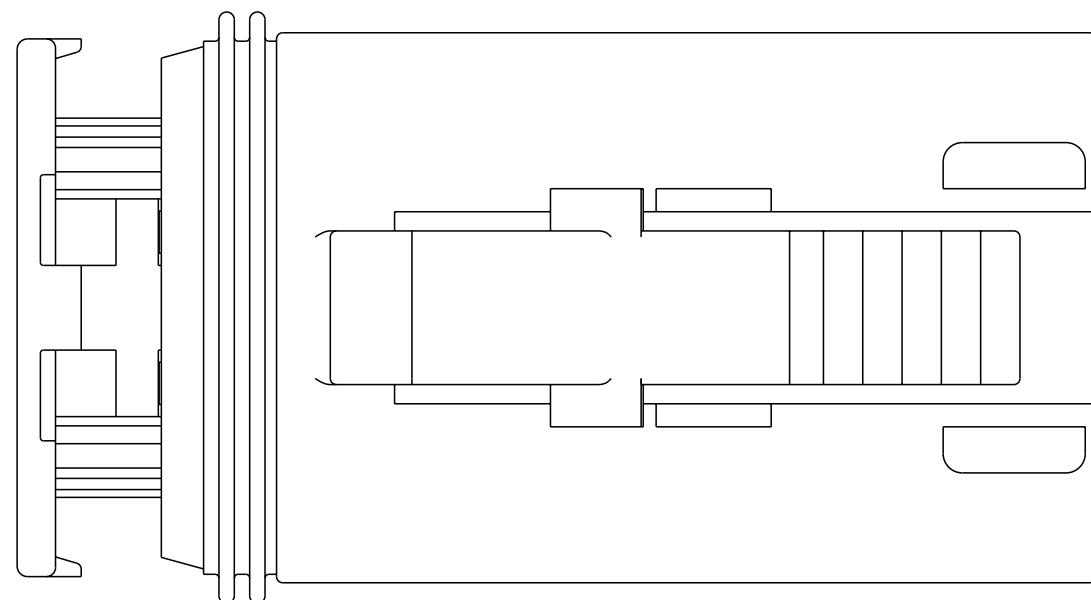


CUSTOMER DRAWING	SCALE	4:1	SHEET	1 OF 2	REV	
------------------	-------	-----	-------	--------	-----	--


P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

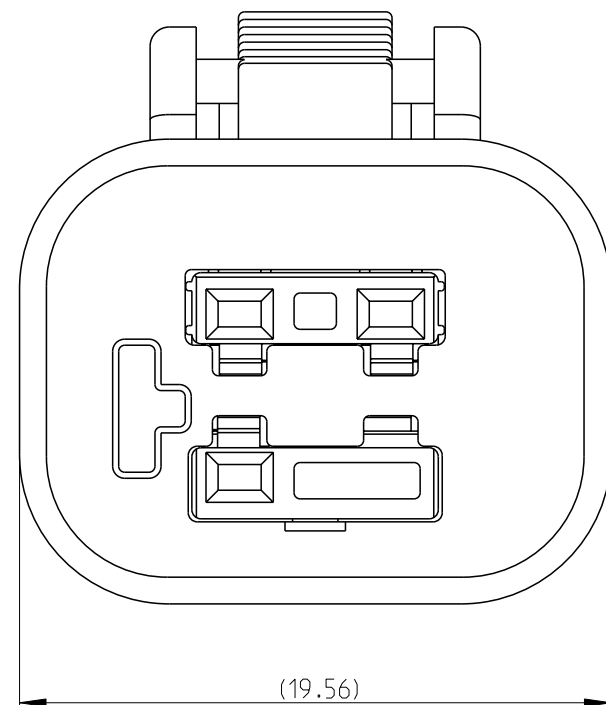


CODING A
PN:1-2356607-1 (VO)
3-2356607-1 (HB)

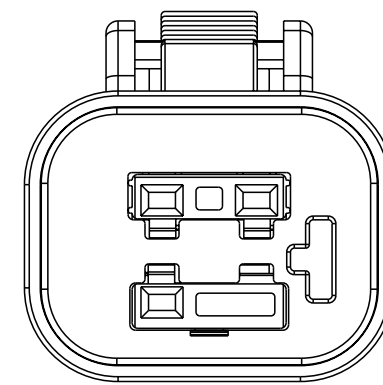

CODING B
PN:1-2356607-2 (V0)
3-2356607-2 (HB)

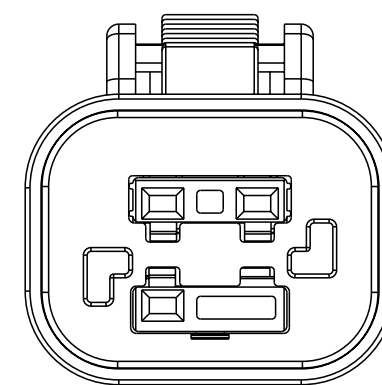

CODING C
PN:1-2356607-3 (V0)
3-2356607-3 (HB)

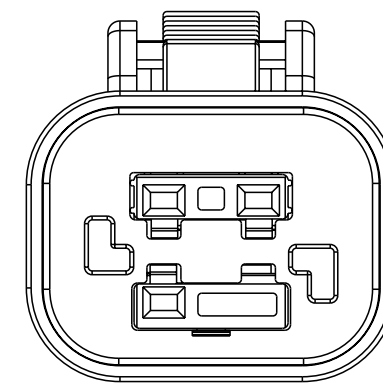

CODING D
PN:1-2356607-4 (V0)
3-2356607-4 (HB)

NOTES:

1.PLUG 1-2356607-X MATES WITH 1-2356631-X RECEPTACLE (X=1, 2, 3, 4 FOR RELEVANT CODE).
PLUG 3-2356607-X MATES WITH 3-2356631-X RECEPTACLE (X=1, 2, 3, 4 FOR RELEVANT CODE).

2.MATERIAL: HOUSING: PBT GF30, SEE TABLE FOR COLOR
TPA: PBT GF30, SEE TABLE FOR COLOR
FRONT SEAL: VMQ(RED-ORANGE)

3 DATE CODE: IDENTIFIES THE YEAR, MONTH, DAY AND HOUR OF ASSEMBLY.
YEAR: FIRST AND SECOND DIGITS(19=2019)
MONTH: THIRD DIGIT , EXCLUDING I , A=JAN, B=FEB, C=MARCH...(K=OCTOBER)
DAY: FOURTH AND FIFTH DIGITS(14=14th DAY)
HOUR: SIXTH AND SEVENTH DIGITS(11=11AM)

4 PULL TPA TO PRE-LOCK BEFORE TERMINAL INSERTION IN CASE OF TPA BEING HIT TO END-LOCK POSITION.


5 WIRE NO.

6. APPLICABLE TERMINAL PART NUMBERS AND WIRE SIZE:

1418844-1	TIN	GENERAL (USCAR-2 V2)	0.35	Ø1.10~Ø1.40	963142-2	963143-1
1418844-3	SILVER	HIGH VIBRATION (USCAR-2 V3)				
1670146-1	TIN	GENERAL (USCAR-2 V2)	0.5~0.75	Ø1.40~Ø1.90	963142-1	963143-1
1670146-3	SILVER	HIGH VIBRATION (USCAR-2 V3)				
1418850-1	TIN	GENERAL (USCAR-2 V2)	1.0~1.5	Ø1.90~Ø2.40	963142-1	963143-1
1418850-3	SILVER	HIGH VIBRATION (USCAR-2 V3)				
TERMINAL PN	TERMINAL PLATING	APPLICATION	WIRE SIZE (MM2)	INSULATION WIRES(MM)	SWS P/N	BLIND PLUG P/N

1				1				BLUE	PBT-GF30	TPA, CODE D	3
	1				1			NATURAL	PBT-GF30	TPA, CODE C	
		1				1		GREEN	PBT-GF30	TPA, CODE B	
			1				1	YELLOW	PBT-GF30	TPA, CODE A	
1	1	1	1	1	1	1	1	RED-ORANGE	SILICONE	FRONT SEAL	2
1	1	1	1					GRAY	PBT-GF30	HOUSING	1
				1	1	1	1	BLACK	PBT-GF30		
QTY. REQUEST PER ASSY								COLOR	MATERIAL	DESCRIPTION	ITEM NO
7.7	7.7	7.7	7.7	8.2	8.2	8.2	8.2	WEIGHT OF EACH ASSY NO. (g)			
C	C	C	C	C	C	C	C	REVISION OF EACH ASSY NO.			
3-2356607-4 (HB)	3-2356607-3 (HB)	3-2356607-2 (HB)	3-2356607-1 (HB)	1-2356607-4 (VO)	1-2356607-3 (VO)	1-2356607-2 (VO)	1-2356607-1 (VO)	TE ASSEMBLY PN			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
mm		0 PLC	±.
		1 PLC	±0.25
		2 PLC	±0.15
		3 PLC	±.
		4 PLC	±.
		ANGLES	±.
MATERIAL		FINISH	
-		-	
-		-	

DWN Y. TANG	18SEP2019	 TE Connectivity			
CHK F. JIANG	18SEP2019				
APVD L. YIN	18SEP2019	NAME SUPERSEAL PRO 3POS, PLUG ASSEMBLY MCON1.2,CB TEMINAL			
PRODUCT SPEC 108-32189					
APPLICATION SPEC 114-32258					
WEIGHT -		SIZE A2	CAGE CODE 00779	DRAWING NO C=2356607	RESTRICTED TO -
CUSTOMER DRAWING			SCALE 1:1	SHEET 2 of 2	REV 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2356607-2](#) [2356607-3](#) [2356607-4](#) [1-2356607-1](#) [1-2356607-2](#) [1-2356607-3](#) [1-2356607-4](#) [2356607-1](#)