

NSCH 2M

Weidmüller Interface GmbH & Co. KG


Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image

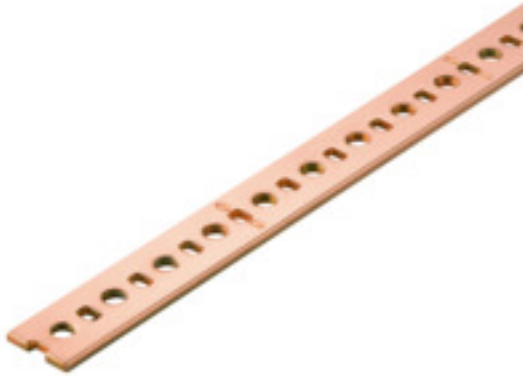

Of all the metals used, copper has the best electrical conductivity, which results in the highest short-circuit resistance. This makes the copper busbar the most widely used variant.

General ordering data

Version	Accessories, Busbar, Copper
Order No.	1313600000
Type	NSCH 2M
GTIN (EAN)	4008 190052096
Qty.	2 m

NSCH 2M

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technische Daten

Dimensions and weights

Depth	2 mm	Depth (inches)	0.079 inch
Height	15 mm	Height (inches)	0.591 inch
Width	2,000 mm	Width (inches)	78.74 inch
Net weight	223.5 g		

Material data

Material	Copper	Colour	silver
----------	--------	--------	--------

Additional technical data

Installation advice	Direct mounting
---------------------	-----------------

General

Installation advice	Direct mounting
---------------------	-----------------

Rating data

Rated current	24 A
---------------	------

Classifications

ETIM 6.0	EC002848	ETIM 7.0	EC002848
ETIM 8.0	EC002848	ETIM 9.0	EC002848
ECLASS 9.0	27-14-11-92	ECLASS 9.1	27-14-11-92
ECLASS 10.0	27-14-11-92	ECLASS 11.0	27-14-11-92
ECLASS 12.0	27-14-11-92	ECLASS 13.0	27141192

Approvals

ROHS	Conform
------	---------

Downloads

Approval/Certificate/Document of Conformity	Attestation of Conformity ATEX Certificate IECEX Certificate UKCA Certificate
Engineering Data	CAD data – STEP
User Documentation	StorageConditionsTerminalBlocks
Catalogues	Catalogues in PDF-format
Brochures	