

# P-FU 5X20 LED 60-EX - Fuse plug

3036823

<https://www.phoenixcontact.com/us/products/3036823>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse plug, Prior to replacing the cartridge fuse, disconnect the fuse connector from the basic terminal block., nom. voltage: 500 V, nominal current: 6.3 A, fuse type: G / 5 x 20, color: black

## Your advantages

- Large-surface labeling option
- Test contacts on both sides of the fuse
- Versions with bipolar error display
- Can be used for overload/short-circuit protection

## Commercial data

Item number	3036823
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	BE29
Product key	BE2Z3X
Catalog page	Page 163 (C-1-2019)
GTIN	4046356919234
Weight per piece (including packing)	4.13 g
Weight per piece (excluding packing)	4.13 g
Customs tariff number	85369095
Country of origin	PL

# P-FU 5X20 LED 60-EX - Fuse plug

3036823

<https://www.phoenixcontact.com/us/products/3036823>



## Technical data

### Notes

Notes on operation	Prior to replacing the cartridge fuse, disconnect the fuse connector from the basic terminal block.
--------------------	---

### Product properties

Product type	Fuse
Potentials	1

### Data management status

Article revision	04
------------------	----

### Insulation characteristics

Degree of pollution	3
---------------------	---

### Electrical properties

Fuse	G / 5 x 20
LED voltage range	30 V AC/DC ... 60 V AC/DC
LED current range	0.4 mA ... 0.86 mA

### Input data

LED voltage range	30 V AC/DC ... 60 V AC/DC
-------------------	---------------------------

### Connection data

Nominal current	6.3 A (the current is determined by the fuse used)
Maximum load current	6.3 A (the current is determined by the fuse used)
Nominal voltage	500 V (The voltage is determined by the fuse or selected LED display)

### Dimensions

Width	6.2 mm
Height	28 mm
Depth	25 mm
Length	28 mm

### Material specifications

Color	black (RAL 9005)
Flammability rating according to UL 94	V0
Insulating material	PA

### Environmental and real-life conditions

#### Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
---------------------------------	--

# P-FU 5X20 LED 60-EX - Fuse plug



3036823

<https://www.phoenixcontact.com/us/products/3036823>

Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, no longer than 24 h, -60°C to +70°C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

# P-FU 5X20 LED 60-EX - Fuse plug


3036823

<https://www.phoenixcontact.com/us/products/3036823>



## Drawings

Circuit diagram

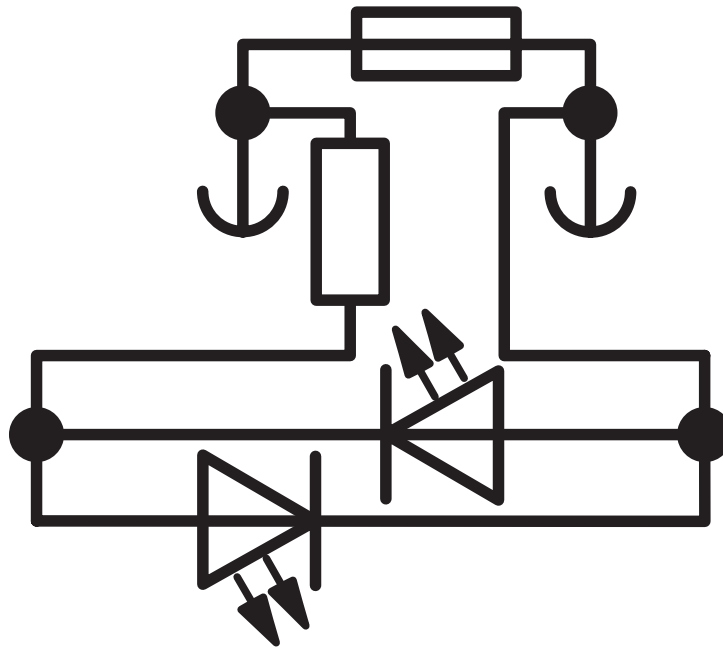


# P-FU 5X20 LED 60-EX - Fuse plug

3036823

<https://www.phoenixcontact.com/us/products/3036823>



Application drawing

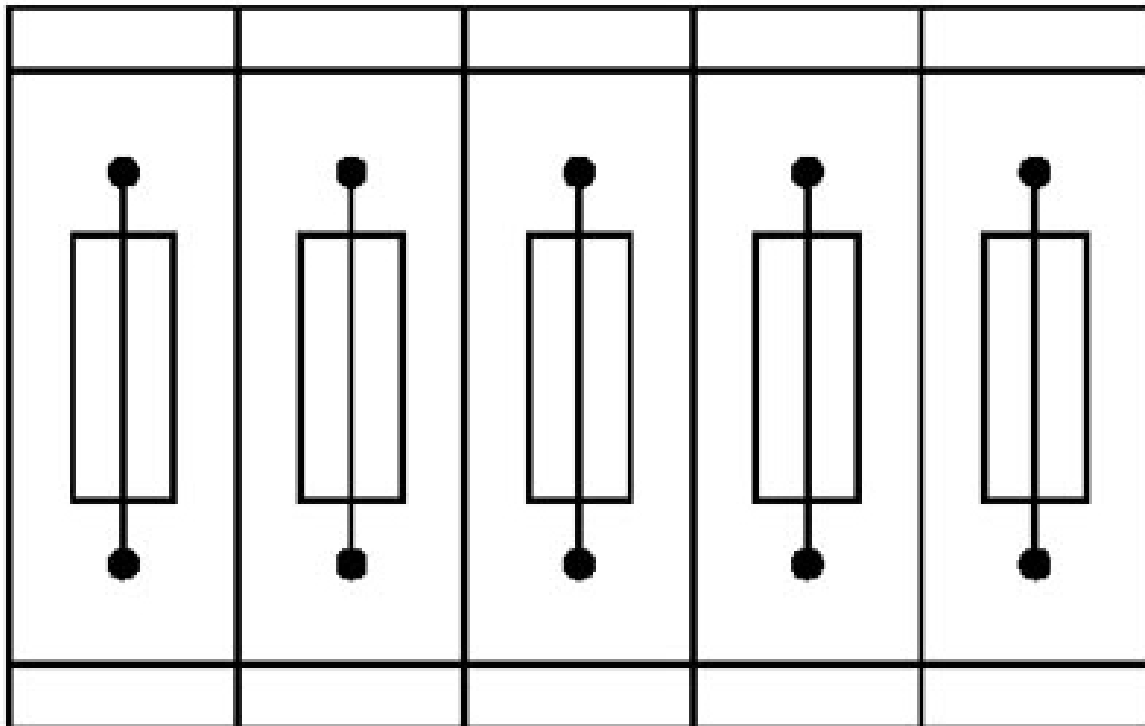

Fuse terminal blocks in interconnected arrangement,  
block consisting of 5 fuse terminal blocks


P-FU 5X20 LED 60-EX - Fuse plug



3036823

<https://www.phoenixcontact.com/us/products/3036823>

Application drawing

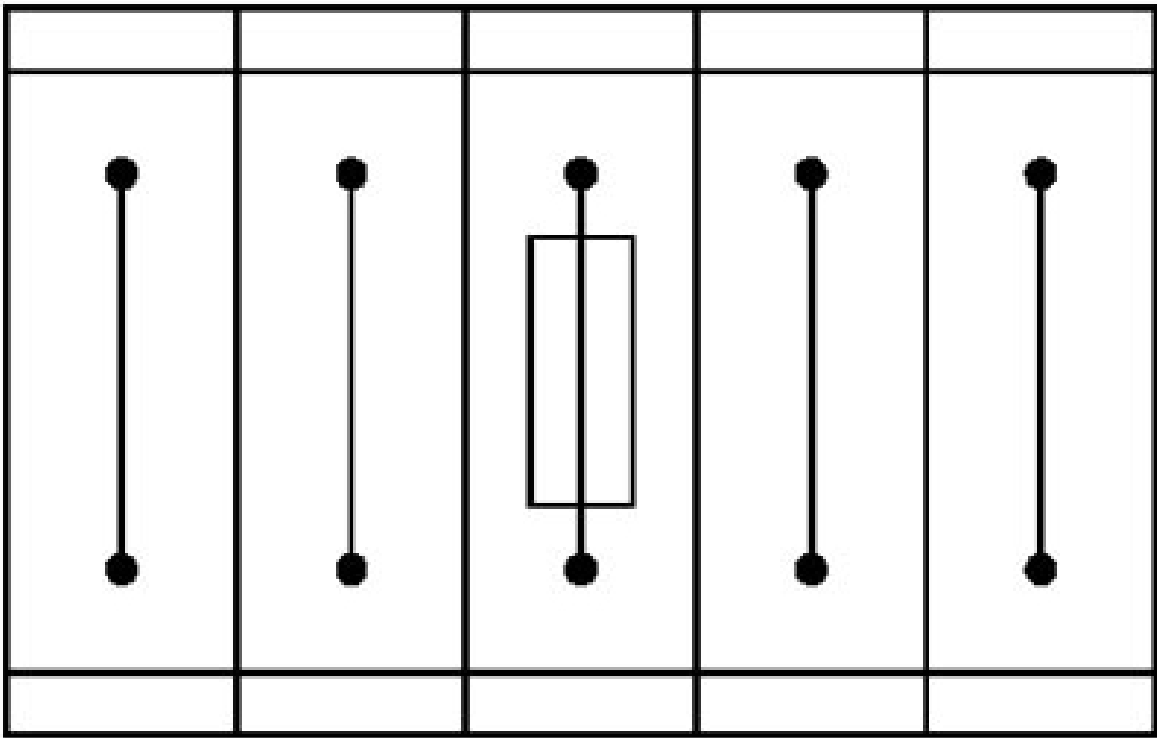

Fuse terminal block in single arrangement,  
block consisting of one fuse terminal block and 4 feed-through terminal blocks

# P-FU 5X20 LED 60-EX - Fuse plug



3036823

<https://www.phoenixcontact.com/us/products/3036823>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3036823>



**CSA**

Approval ID: 2030668

Nominal voltage  $U_N$

Nominal current  $I_N$

Cross section AWG

Cross section  $\text{mm}^2$

300 V

10 A

-

-



**EAC**

Approval ID: RU C-DE.BL08.B.00714



**cUL Recognized**

Approval ID: E192998



**EAC Ex**

Approval ID: RU C-DE.Ax07.B.03227



**UL Recognized**

Approval ID: E192998



**CCC**

Approval ID: 2020322313000632



**UKCA-EX**

Approval ID: UL22UKEX2452U

**cULus Recognized**

# P-FU 5X20 LED 60-EX - Fuse plug



3036823

<https://www.phoenixcontact.com/us/products/3036823>

## Classifications

### ECLASS

ECLASS-11.0	27141149
ECLASS-12.0	27141149
ECLASS-13.0	27250305

### ETIM

ETIM 9.0	EC002018
----------	----------

### UNSPSC

UNSPSC 21.0	39121600
-------------	----------



# P-FU 5X20 LED 60-EX - Fuse plug



3036823

<https://www.phoenixcontact.com/us/products/3036823>

## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)