

1554746

https://www.phoenixcontact.com/us/products/1554746

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, 5-position, Pin, straight, M12, coding: A, Rear mounting, Pg9, Solder pins, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1%) item no.: 1240044

Your advantages

- Easy PCB assembly: one-piece connectors for wave soldering
- · All standard pin assignments and codings for signal, data, and power transmission with a uniform design-in design

Commercial data

Item number	1554746
Packing unit	20 pc
Minimum order quantity	1 pc
Sales key	AB26
Product key	ABQEOL
Catalog page	Page 193 (C-2-2013)
GTIN	4046356170413
Weight per piece (including packing)	15.685 g
Weight per piece (excluding packing)	14.9 g
Customs tariff number	85366990
Country of origin	DE



1554746

https://www.phoenixcontact.com/us/products/1554746

Technical data

Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
Order information:	Lock nut is included in the scope of delivery

Mounting

Mounting type	Rear mounting Pg9 With locking nut
Assembly note	With locking nut

Product properties

Product type	Circular connectors (device side)
Number of positions	5
Shielded	no
Coding	A
Thread type	M12

Data management status

Article revision 06	3
---------------------	---

Insulation characteristics

Overvoltage category	II	
Degree of pollution	3	

Dimensions

Length of the solder pin	6 mm
	6 mm

Material specifications

Flammability rating according to UL 94	V0
Seal material	FKM
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 6.6
Material for screw connection	Stainless steel

Electrical properties

Rated surge voltage	1.5 kV
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ



1554746

https://www.phoenixcontact.com/us/products/1554746

Nominal voltage U _N	60 V
Nominal current I _N	4 A
Test voltage	1.5 kV

Connection data

Conductor connection

Connection method	Solder pins
Contact connection type	Pin
Tightening torque	3 Nm 4 Nm (Installation-side)

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	> 100

Connector

Connection 1

Head design	Pin
Head cable outlet	straight
Head thread type	M12
Coding	A

Cable/line

Ambient temperature (operation)	-40 °C 85 °C (cable, fixed installation)
	-25 °C 85 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65/IP67/IP69/IP69K
	IP65/IP67/IP69K
Ambient temperature (operation)	-25 °C 85 °C (Plug / socket)
	-40 °C 85 °C (without mechanical actuation)
	-25 °C 85 °C (Cable, flexible installation)
	-40 °C 85 °C (cable, fixed installation)

Standards and regulations

M12


Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101



1554746

https://www.phoenixcontact.com/us/products/1554746

Drawings

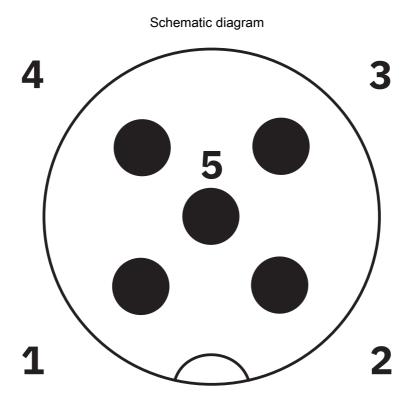

Pin assignment M12 plug, 8-pos., view plug side



1554746

https://www.phoenixcontact.com/us/products/1554746

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1554746

.71	cUL Recognized Approval ID: E118976-20100522			
	Nominal voltage U_N	Nominal current I _N	Cross section AWG	Cross section mm ²
	60 V	4 A	22 - 22	-

71	UL Recognized Approval ID: E118976-20	100522			
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
		60 V	4 A	22 - 22	-

c 911 vs	cULus Recogniz Approval ID: E221474	z ed 4-20140616			
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
		60 V	4 A	-	-

cUI us	Recognized
COLUS	1 Vecogriizeu



1554746

https://www.phoenixcontact.com/us/products/1554746

Classifications

UNSPSC 21.0

ECLASS

27440102
27440116
27440116
EC002635

39121400



1554746

https://www.phoenixcontact.com/us/products/1554746

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes	
Exemption	6(c)	
China RoHS		
Environment friendly use period (EFUP)	EFUP-50	
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.	
EU REACH SVHC		
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)	
SCIP	02dae83b-6b32-4199-a758-56e7c6573d95	

Phoenix Contact 2024 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com