


### General information

Part number	A22LOC-P26MCC0-820S	
Termination	solder	
Size	2	
Locking principle	break	
Coding	0_key	
Cable Diameter	cable_mini_82	
Cable outlet	bend_relief	

Illustrations may differ from original product.  
Dimensions, unless otherwise specified, in mm.

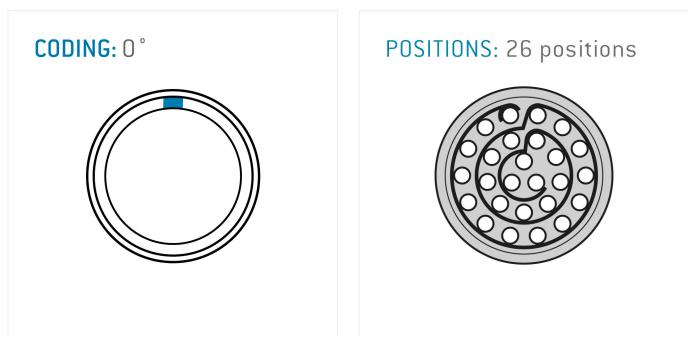

The pin layout corresponds to the view on the termination area

### Contact insert description

Number of contacts	26
Contact type	pins
Contact diameter	05mm
Insulator material	peek
Wire cross section	28_awg
Termination	solder
Termination diameter	045mm

reverse\_gender\_on\_request

### Technical information

Max. creepage and air clearance distance	06_mm	11_mm
Nominal current single contact	04_a	iec_60512_5_2
Test voltage	09_kv_ac	sae_13441

safety\_text

## Mechanical and environmental data

Degree of protection*	ip50
Operating temperature	40_120_c
Mating cycles	5000

mated\_unmated

## Material and surface treatments

Housing	m_chrome
Contact	cu_alloy_gold

safety\_text\_2

ul\_text

illustrative\_text