

DO NOT
SCALE FROM
THIS PRINT

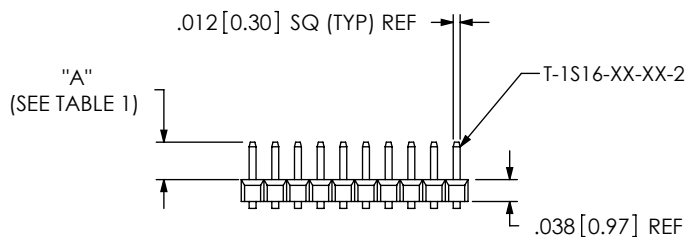
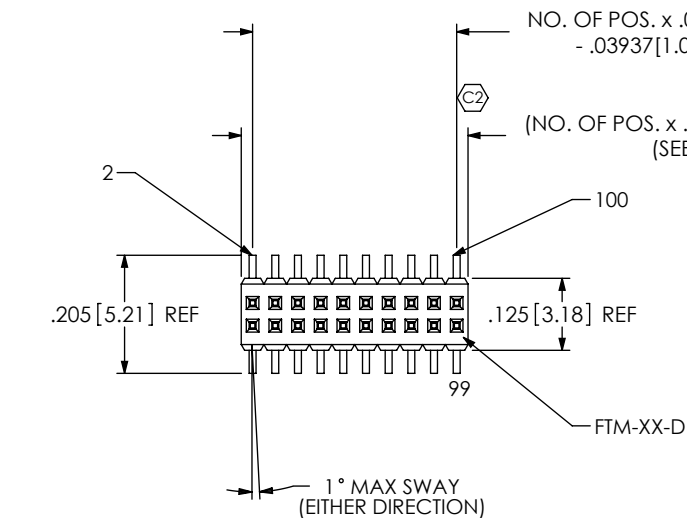


FIG 1
FTM-1XX-02-X-DV SHOWN

NOTES:

- PARTS MAY BE CUT TO POSITION; .010 MAX CUT FLASH
- SHEAR TAILS TO DIMENSION SHOWN; .003 MAX BURR.
- NOTE DELETED.
- ⊗ REPRESENTS A CRITICAL DIMENSION FOR STATISTICAL PROCESS CONTROL.
- NOTE DELETED.
- NOTE DELETED.
- POSITIONS -02 THRU -04 TO BE LAYER PACKAGED, AND POSITIONS -05 THRU -50 TO BE TUBE PACKAGED.
- PARTS WITH -S OPTION ARE TO APPEAR AS SHOWN IN FIG 2 OR FIG 6 AT SAMTEC'S DISCRETION.
- 4 POSITIONS MUST BE ADDED TO PART CALL OUT TO ALLOW FOR PUSH ON SHROUDS.
EX: FTM-125-02-L-DV-S REQUIRES A 29 POSITION STRIP.
- MINIMUM PUSHOUT FORCE: .5 LB (8 OZ)

TABLE 1		
LEAD STYLE	"A"	TERMINAL
-02	.075 [1.91]	T-1S16-03-XX-2
-03	.065 [1.65]	T-1S16-04-XX-2

CPC FREQUENCY THIS SHEET	
A	C1, C2, C3, C5, C6, C7, C8
B	
C	
D	

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
TOLERANCES ARE:
DECIMALS ANGLES
.XX: ±.01 [.3] 3°
.XXX: ±.005 [.13]
.XXXX: ±.0020 [.051]

MATERIAL: DO NOT SCALE DRAWING
BODY: VECTRA E130
COLOR: BLACK
TERMINAL: PHOS BRONZE
MAX FLASH ALLOWED: .002 [.05]
MAX GATE VESTIGE ALLOWED: .002 [.05]

F:\DWG\MISC\MKTG\FTM-1XX-XX-XX-DV-XX-MKT.SLDDRW

FTM-1XX-XX-XX-DV-XX

No OF POSITIONS (PER ROW)
-02 THRU -50 (UNSHROUDED)
-05 THRU -46 (SHROUDED)

LEAD STYLE
-02: .075 [1.91] POST HEIGHT
-03: .065 [1.65] POST HEIGHT

PLATING SPECIFICATION



-F: FLASH SELECTIVE (USE T-1S16-XX-F-2)
-L: LIGHT SELECTIVE (USE T-1S16-XX-L-2)
-H: HEAVY GOLD (USE T-1S16-XX-H-2)
-G: GOLD (USE T-1S16-XX-G-2)
-FM: FLASH GOLD W/ MATTE TIN TAILS (USE T-1S16-XX-F-2)
-LM: LIGHT GOLD W/ MATTE TIN TAILS (USE T-1S16-XX-L-2)

OPTION

-TR: TAPE & REEL PACKAGING
-P: PICK AND PLACE PAD (USE PPP-30) (USE PPP-30-NT FOR TAPE & REEL) (AVAILABLE ON POSITIONS -07 THRU -50) (SEE FIG 4, SHT 3)
-S: END SHROUDS (05 POS. MINIMUM) (SEE NOTE 8) (SEE NOTE 9)
PRESS FIT SHROUDS: SEE FIG 2
MOLDED SHROUDS: SEE FIG 6
-SA: END SHROUDS W/ ALIGNMENT PINS (SEE FIG 3, SHT. 2) (SEE NOTE 9) (05 POS PER ROW MINIMUM, 46 POS PER ROW MAXIMUM) (USE FTM-XX-D, USE FTMH-75-D-ES-XX-X FOR MOLDED END SHROUDS)

ROW OPTION

-DV: DUAL VERTICAL

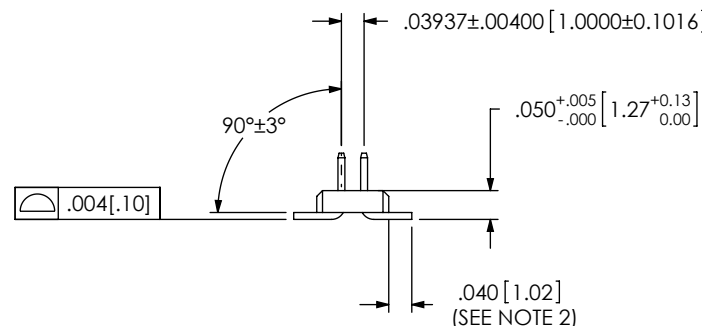

CRITICAL DIMENSION INSPECTION INSTRUCTION TABLE

ASSEMBLY OPERATION	IN PROCESS INSPECTION
AUTO FILL T-1S16-XX-XX-2	C1, C3 C5, C6, C8
CUT TO POSITION	C2, C7
INSTALL FEM	C9, C10, C16
INSTALL FEM-A	C12
INSTALL PICK AND PLACE PAD	C13

CPC'S INTENTIONALLY DELETED: C4, C11, C14, C15

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code: 55322

DESCRIPTION:
1mm x 1mm LOW PROFILE SMT STRIP ASM

DWG. NO. **FTM-1XX-XX-XX-DV-XX**

BY: B MENEAR 2/13/2006 SHEET 1 OF 3

FIG 2

-S OPTION

FTM-1XX-02-X-DV-S SHOWN

(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1) (SEE NOTE 8) (SEE NOTE 9)
(PRESS FIT SHROUDS TO HAVE 8 UNUSED SOLDER TAILS AS SHOWN)

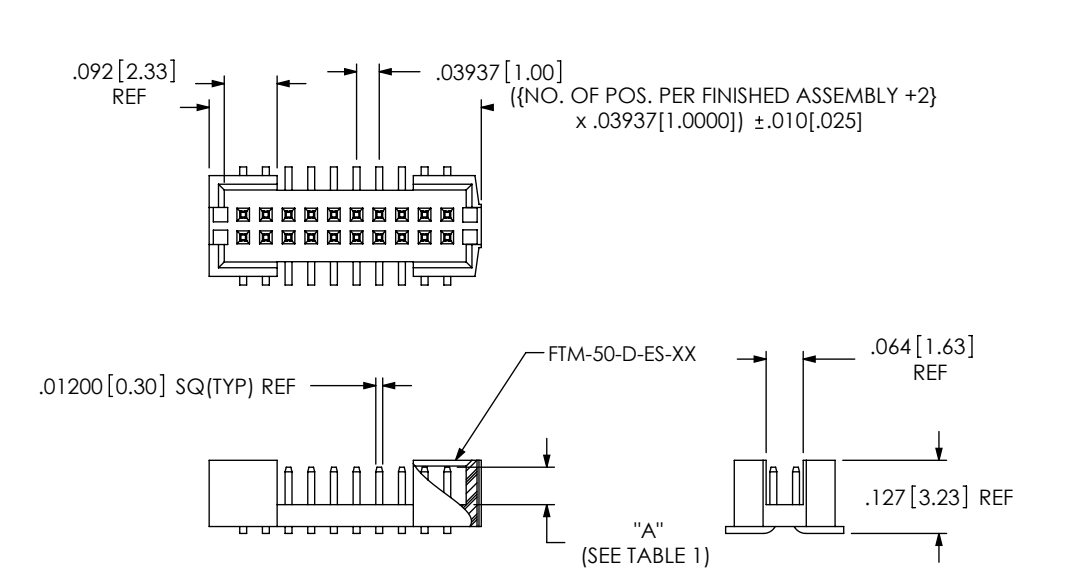
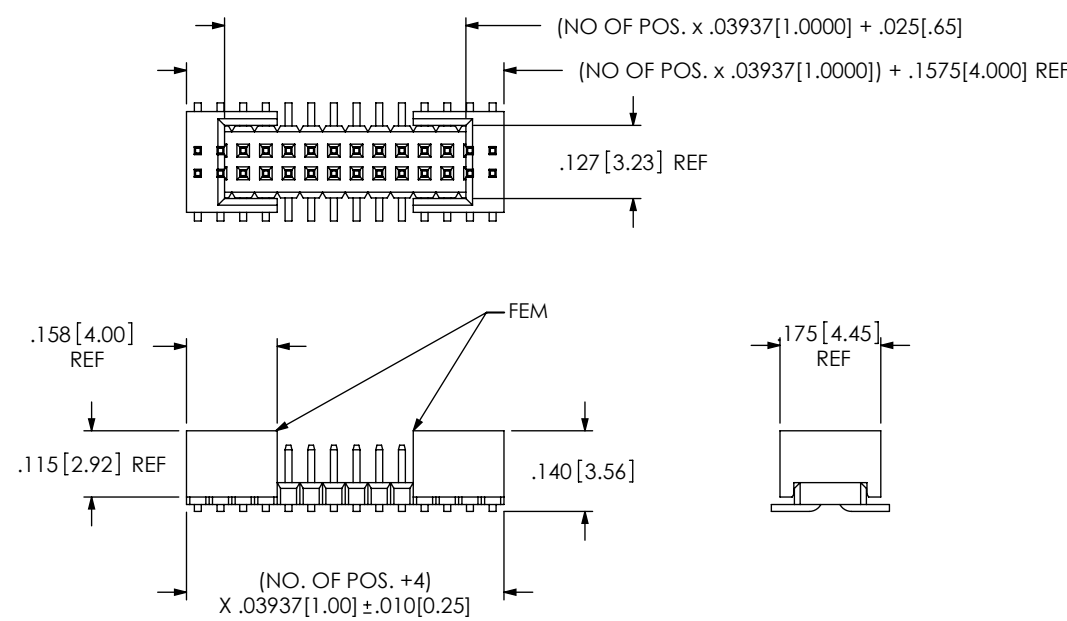


FIG 6

-S OPTION: MOLDED SHROUD
FTM-1XX-02-X-DV-S SHOWN


(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)(SEE NOTE 8)

FIG 3

-SA SHOWN: PRESS FIT SHROUD

FTM-1XX-02-X-DV-SA



(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)
(SEE NOTE 9)

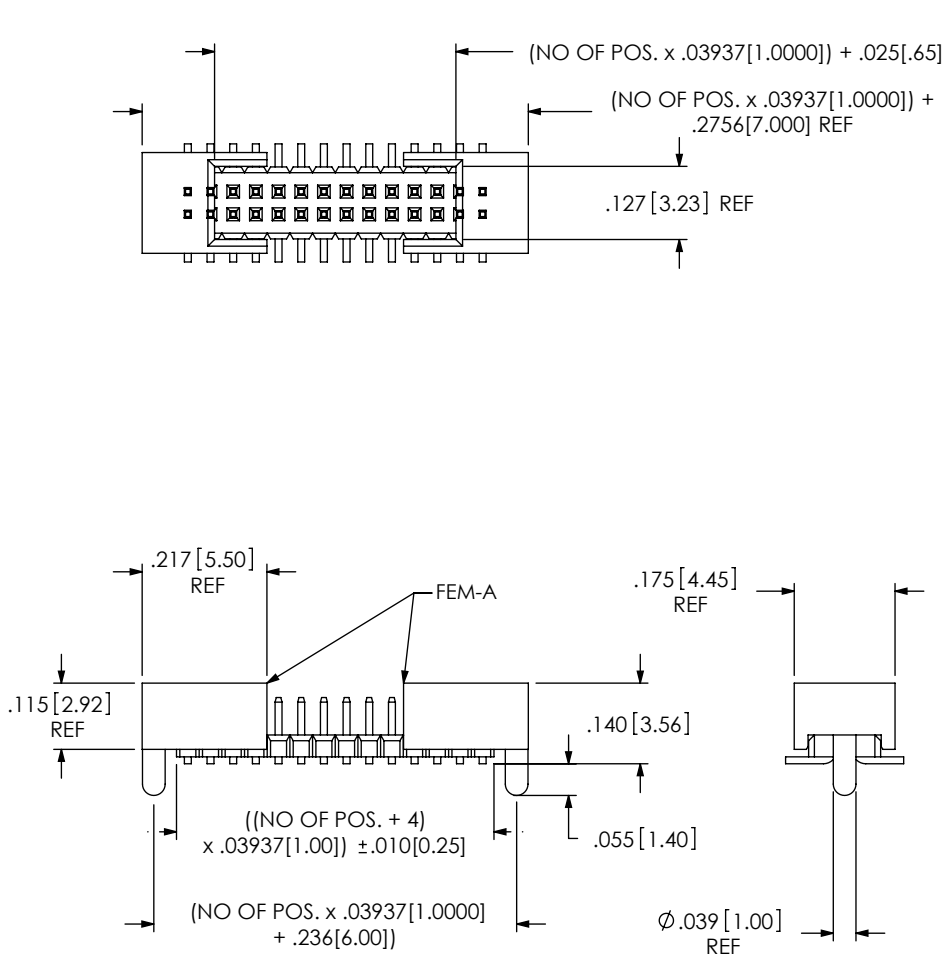

CPC FREQUENCY THIS SHEET		PROPRIETARY NOTE THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC. DO NOT SCALE DRAWING SHEET SCALE: 2:1	 520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail: info@SAMTEC.com code: 55322	DESCRIPTION: 1mm x 1mm LOW PROFILE SMT STRIP ASM	
A	C9, C10, C12			DWG. NO. FTM-1XX-XX-XX-DV-XX	
B	C16			BY: B MENEAR 2/13/2006	
C				SHEET 2 OF 3	
D					

FIG 4

(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)

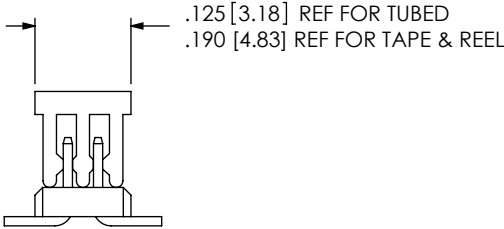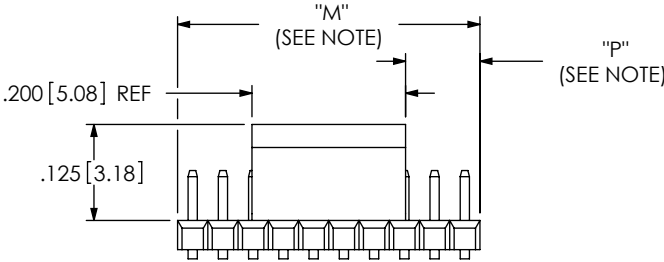


NOTE: "M" = USED MEASURED DIMENSION (REF)
"P" = {("M" - .200 [5.08]) / 2} +/- .020 [.51]


PACKAGING VIEW

(SEE NOTE 7) NOTE:
ONLY POSITIONS -05 THRU -50 ARE TO BE
TUBED. POSITIONS -02 THRU -04 TO BE
LAYER PACKAGED ONLY. INSERT PLUG TP-30
AT AN ANGLE INTO PT-1-24-01-49, PLUG
MUST SUPPORT THE INSULATOR.

PACKAGING TABLE		
OPTIONS	PACKAGING TUBE	PLUGS
W/O OPTION	PT-1-24-01-49	TP-30
-P	PT-1-24-01-43	TP-24
-S, -S-P, -SA, -SA-P	PT-1-24-13-09	TP-24

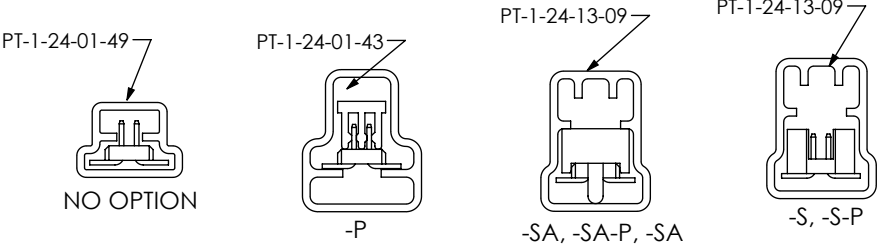

F:\DWG\MISC\MKTG\FTM-1XX-XX-XX-DV-XX-MKT.SLDDRW

CPC FREQUENCY THIS SHEET		PROPRIETARY NOTE THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC. DO NOT SCALE DRAWING SHEET SCALE: 4:1	 520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail: info@SAMTEC.com code: 55322
A	C13		
B			
C			
D			
			DESCRIPTION: 1mm x 1mm LOW PROFILE SMT STRIP ASM
			DWG. NO. FTM-1XX-XX-XX-DV-XX
BY: B MENEAR 2/13/2006			SHEET 3 OF 3