

1404549

https://www.phoenixcontact.com/us/products/1404549

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Control cabinet feed-through, M12, 8-pos., X-coded to RJ45 socket, socket input 180°, IP65/67

Your advantages

· Compact design

Commercial data

Item number	1404549
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB18
Product key	ABNPBC
Catalog page	Page 348 (C-2-2019)
GTIN	4046356699426
Weight per piece (including packing)	36.5 g
Weight per piece (excluding packing)	36.5 g
Customs tariff number	85366990
Country of origin	DE



1404549

https://www.phoenixcontact.com/us/products/1404549

Technical data

Product properties

Product type	Female insert
Туре	M12
Sensor type	Ethernet
Number of positions	8
Connection profile	M12
Number of slots	1
Shielded	yes
Cable outlet	straight
Thread type	M12

Data management status

Article revision	07	
Insulation characteristics		
Overvoltage category	III	
Degree of pollution	2	

Electrical properties

Maximum load current	0.5 A
Rated voltage (III/3)	72 V (DC)
Rated surge voltage	0.8 kV
Rated current	1.75 A
Nominal voltage U _N	48 V
Nominal current I _N	0.5 A
Transmission medium	Copper
Transmission characteristics (category)	CAT6 _A
Power transmission	PoE++

Connection data

Connection technology

Connection method	Coupling	

Material specifications

Color	black
Flammability rating according to UL 94	V0
Housing material	Plastic
Material of grip body	PA
Contact material	Copper alloy

Connector

Connection 1



1404549

https://www.phoenixcontact.com/us/products/1404549

_	0.1.1110		
Туре	Socket M12		
Locking type	Screw connection		
Coding type	X		
Shielded	yes		
Insertion/withdrawal cycles	≥ 750 (RJ45)		
Degree of protection	IP65/IP67		
Connection 2			
Туре	Socket RJ45		
Degree of protection	IP20		
Mechanical properties			
Mechanical data			

Environmental and real-life conditions

Insertion/withdrawal cycles

Ambient conditions

Degree of protection	IP65
	IP67
	IP65/IP67, when installed
Ambient temperature (operation)	-25 °C 85 °C
Ambient temperature (storage/transport)	-25 °C 85 °C

≥ 100

Mounting

Mounting type Rear mounting




1404549

https://www.phoenixcontact.com/us/products/1404549

Drawings



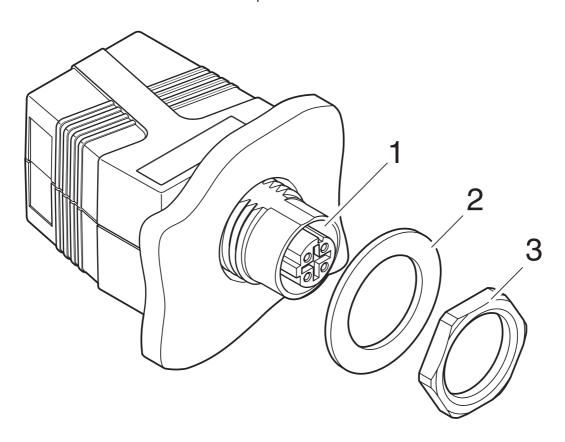


Exploded drawing



1404549

https://www.phoenixcontact.com/us/products/1404549

Schematic diagram

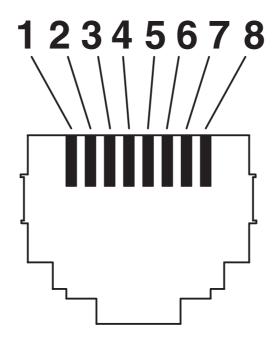


RJ45 jack insert




1404549

https://www.phoenixcontact.com/us/products/1404549

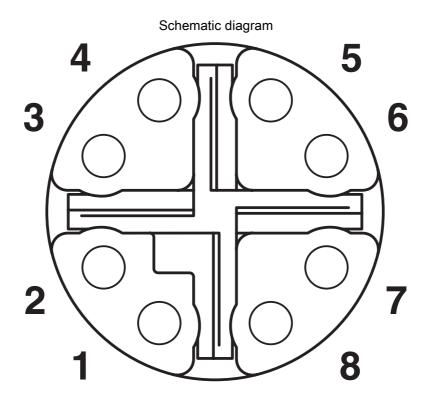

Pin assignment of M12 female, 8-pos., X-coded, view: female side

Dimensional drawing

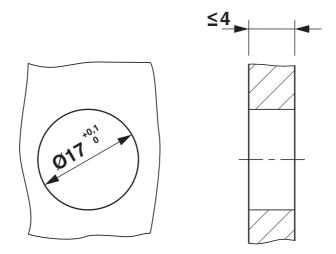


Mounting cutout



1404549

https://www.phoenixcontact.com/us/products/1404549

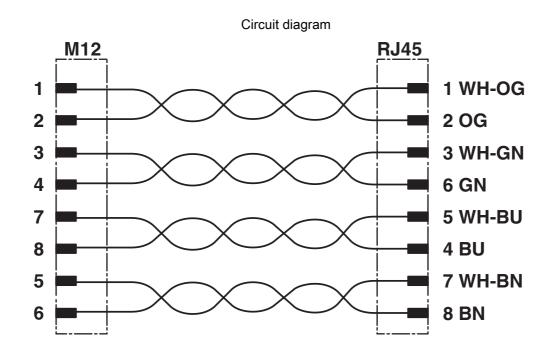



1404549

https://www.phoenixcontact.com/us/products/1404549

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1404549

©	UL Listed Approval ID: E335024-2014	0306			
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
		60 V	0.5 A	-	-

•	cUL Listed Approval ID: E335024-201	40306			
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
		60 V	0.5 A	-	-

cULus Listed



1404549

https://www.phoenixcontact.com/us/products/1404549

Classifications

ECLASS

	ECLASS-11.0	27440312			
	ECLASS-12.0	27440312			
	ECLASS-13.0	27440312			
ET	ETIM				
	ETIM 9.0	EC002641			
UN	UNSPSC				
	UNSPSC 21.0	39121400			



1404549

https://www.phoenixcontact.com/us/products/1404549

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	e5faff2b-d642-4712-b97d-a5ac81b8c350

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com