

RC-12S1N121L00 - Cable connector



1598510

<https://www.phoenixcontact.com/us/products/1598510>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, series: RC, straight, shielded: no, Screw locking mechanism, No. of pos.: 12, Direction of rotation: Standard, contact connection type: Socket, Solder cup, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1240963

Commercial data

Item number	1598510
Packing unit	20 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	AB31
Product key	ABRAFA
GTIN	4046356220996
Weight per piece (including packing)	101.755 g
Weight per piece (excluding packing)	101.755 g
Customs tariff number	85366990
Country of origin	DE

RC-12S1N121L00 - Cable connector



1598510

<https://www.phoenixcontact.com/us/products/1598510>

Technical data

Product properties

Product type	Circular connector (cable-side)
Type of the screw connection	IP68 screw
Thread type	M23

Material specifications

Flammability rating according to UL 94	V0
--	----

Connection data

Conductor connection

Connection method	Solder connection
-------------------	-------------------

Mechanical properties

Mechanical data

Type of the screw connection	IP68 screw
------------------------------	------------

Connector

Insulating body

Coding	N
Insertion/withdrawal cycles	50
Connection method	Solder cup
Contact switching type	Socket
Application	Signal
Number of positions	12
Direction of rotation	Standard
Connection profile	12
Contact diameter	1 mm
Litz wire cross-section	0.08 mm ²
Litz wire cross-section	1 mm ²
Rated current	8 A
Rated voltage	48 V AC 74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3

Housing

Housing material	Metal
Type of locking	Screw locking mechanism

RC-12S1N121L00 - Cable connector



1598510

<https://www.phoenixcontact.com/us/products/1598510>

Pg screw connection	none
Degree of protection (plugged in)	IP65
	IP67
Thread type	M23

Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP67

RC-12S1N121L00 - Cable connector




1598510

<https://www.phoenixcontact.com/us/products/1598510>

Drawings

Schematic diagram

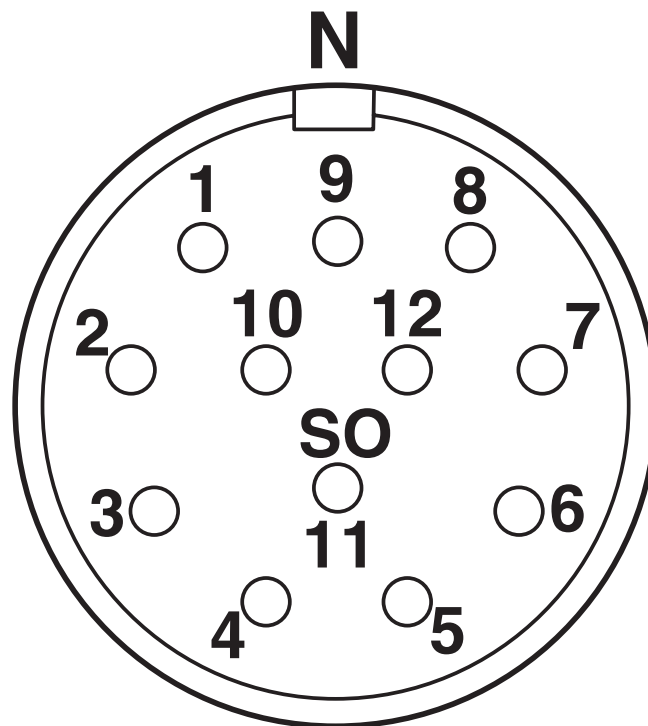

Connector pin assignment

RC-12S1N121L00 - Cable connector



1598510

<https://www.phoenixcontact.com/us/products/1598510>

Classifications

ECLASS

ECLASS-11.0	27440109
ECLASS-12.0	27440109
ECLASS-13.0	27440109

ETIM

ETIM 9.0	EC003569
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

RC-12S1N121L00 - Cable connector



1598510
<https://www.phoenixcontact.com/us/products/1598510>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	88679a20-ba1f-43e2-8c08-b0b0b12d3e29

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com