

1595802

https://www.phoenixcontact.com/us/products/1595802

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, series: RC, straight, shielded: no, Screw locking mechanism, No. of pos.: 8+1, Direction of rotation: Standard, contact connection type: Socket, Solder cup, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1240642

Commercial data

Item number	1595802
Packing unit	20 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	AB31
Product key	ABRAFA
GTIN	4046356208314
Weight per piece (including packing)	82.03 g
Weight per piece (excluding packing)	82.03 g
Customs tariff number	85366990
Country of origin	DE



1595802

https://www.phoenixcontact.com/us/products/1595802

Technical data

Product properties

Product type	Circular connector (cable-side)
Connector	

Connector

Insulating body

Insertion/withdrawal cycles	Coding	N
Contact switching type Application Signal Number of positions Direction of rotation Standard Connection profile 8+1 Contact diameter Power contacts Litz wire cross-section Power contacts min. Litz wire cross-section Power contacts max. Rated current Power contacts Rated voltage 48 V AC 74 V DC Rated surge voltage 1.5 kV Overvoltage category Degree of pollution 3 Contact diameter Signal contacts min. Litz wire cross-section Signal contacts max.	Insertion/withdrawal cycles	50
Application Signal Number of positions 9 Direction of rotation Standard Connection profile 8+1 Contact diameter Power contacts 2 mm Litz wire cross-section Power contacts min. 0.08 mm² Litz wire cross-section Power contacts max. 2.5 mm² Rated current Power contacts 20 A Rated voltage 48 V AC 74 V DC Rated surge voltage 1.5 kV Overvoltage category III Degree of pollution 3 Contact diameter Signal contacts 1 mm Litz wire cross-section Signal contacts min. 0.08 mm² Litz wire cross-section Signal contacts max. 1 mm²	Connection method	Solder cup
Number of positions 9 Direction of rotation Standard Connection profile 8+1 Contact diameter Power contacts 2 mm Litz wire cross-section Power contacts min. 0.08 mm² Litz wire cross-section Power contacts max. 2.5 mm² Rated current Power contacts 20 A Rated voltage 48 V AC 74 V DC Rated surge voltage 1.5 kV Overvoltage category III Degree of pollution 3 Contact diameter Signal contacts 1 mm Litz wire cross-section Signal contacts min. 0.08 mm² Litz wire cross-section Signal contacts max. 1 mm²	Contact switching type	Socket
Direction of rotation Standard Connection profile 8+1 Contact diameter Power contacts 2 mm Litz wire cross-section Power contacts min. 0.08 mm² Litz wire cross-section Power contacts max. 2.5 mm² Rated current Power contacts 20 A Rated voltage 48 V AC 74 V DC Rated surge voltage 1.5 kV Overvoltage category III Degree of pollution 3 Contact diameter Signal contacts 1 mm Litz wire cross-section Signal contacts min. 0.08 mm² Litz wire cross-section Signal contacts max. 1 mm²	Application	Signal
Connection profile Contact diameter Power contacts Litz wire cross-section Power contacts min. Litz wire cross-section Power contacts max. Rated current Power contacts Rated voltage 48 V AC 74 V DC Rated surge voltage 1.5 kV Overvoltage category III Degree of pollution 3 Contact diameter Signal contacts Litz wire cross-section Signal contacts min. Litz wire cross-section Signal contacts max. 1 mm²	Number of positions	9
Contact diameter Power contacts Litz wire cross-section Power contacts min. Litz wire cross-section Power contacts max. Rated current Power contacts Rated voltage 48 V AC 74 V DC Rated surge voltage 1.5 kV Overvoltage category III Degree of pollution 3 Contact diameter Signal contacts Litz wire cross-section Signal contacts min. Litz wire cross-section Signal contacts max.	Direction of rotation	Standard
Litz wire cross-section Power contacts min. Litz wire cross-section Power contacts max. Rated current Power contacts Rated voltage 48 V AC 74 V DC Rated surge voltage Overvoltage category III Degree of pollution Contact diameter Signal contacts Litz wire cross-section Signal contacts min. Litz wire cross-section Signal contacts max.	Connection profile	8+1
Litz wire cross-section Power contacts max. Rated current Power contacts Rated voltage 48 V AC 74 V DC Rated surge voltage Overvoltage category Degree of pollution Contact diameter Signal contacts Litz wire cross-section Signal contacts min. Litz wire cross-section Signal contacts max. 2.5 mm² 48 V AC 74 V DC 1.5 kV 0.08 mm² 1 mm 0.08 mm² 1 mm²	Contact diameter Power contacts	2 mm
Rated current Power contacts Rated voltage 48 V AC 74 V DC Rated surge voltage Overvoltage category Degree of pollution Contact diameter Signal contacts Litz wire cross-section Signal contacts min. Litz wire cross-section Signal contacts max.	Litz wire cross-section Power contacts min.	0.08 mm²
Rated current Power Contacts Rated voltage 48 V AC 74 V DC Rated surge voltage 1.5 kV Overvoltage category III Degree of pollution 3 Contact diameter Signal contacts 1 mm Litz wire cross-section Signal contacts min. Litz wire cross-section Signal contacts max.	Litz wire cross-section Power contacts max.	2.5 mm ²
74 V DC Rated surge voltage 1.5 kV Overvoltage category III Degree of pollution 3 Contact diameter Signal contacts 1 mm Litz wire cross-section Signal contacts min. 0.08 mm² Litz wire cross-section Signal contacts max. 1 mm²	Rated current Power contacts	20 A
Rated surge voltage 1.5 kV Overvoltage category Degree of pollution Contact diameter Signal contacts 1 mm Litz wire cross-section Signal contacts min. Litz wire cross-section Signal contacts max.	Rated voltage	48 V AC
Overvoltage category Degree of pollution Contact diameter Signal contacts 1 mm Litz wire cross-section Signal contacts min. Litz wire cross-section Signal contacts max.		74 V DC
Degree of pollution Contact diameter Signal contacts 1 mm Litz wire cross-section Signal contacts min. Litz wire cross-section Signal contacts max. 1 mm²		
Contact diameter Signal contacts 1 mm Litz wire cross-section Signal contacts min. Litz wire cross-section Signal contacts max. 1 mm 1 mm²	Rated surge voltage	1.5 kV
Litz wire cross-section Signal contacts min. 0.08 mm² Litz wire cross-section Signal contacts max.		
Litz wire cross-section Signal contacts min. Litz wire cross-section Signal contacts max. 1 mm²	Overvoltage category	III
Litz wire cross-section Signal Contacts max.	Overvoltage category Degree of pollution	III 3
Nominal current per signal contact 8 A	Overvoltage category Degree of pollution Contact diameter Signal contacts	III 3 1 mm
	Overvoltage category Degree of pollution Contact diameter Signal contacts Litz wire cross-section Signal contacts min.	III 3 1 mm 0.08 mm ²

Housing

Housing material	Metal
Type of locking	Screw locking mechanism
Pg screw connection	Pg9
Degree of protection (plugged in)	IP65
	IP67
	IP68
Thread type	M23




https://www.phoenixcontact.com/us/products/1595802



Drawings

Schematic diagram

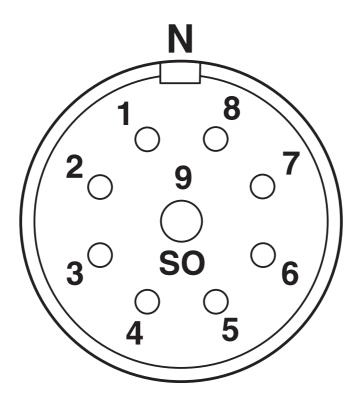

Connector pin assignment



1595802

https://www.phoenixcontact.com/us/products/1595802

Classifications

ECLASS

	ECLASS-11.0	27440102
	ECLASS-12.0	27440116
	ECLASS-13.0	27440116
ETIM		
	ETIM 9.0	EC002635
UNSPSC		
	UNSPSC 21.0	39121400



1595802

https://www.phoenixcontact.com/us/products/1595802

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	dafb675a-72d0-4d13-9acc-7c03c1885afa

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com