

# HC-STA-D50-BWD-ELC-AL - Housing



1424412

<https://www.phoenixcontact.com/us/products/1424412>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Panel mounting base D50, with double locking latch, material: Die-cast aluminum, salt water resistant, height: 32 mm, cable gland: none, Standard, with flat gasket

## Your advantages

- Good shielding in the event of electromagnetic interference

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1424412             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Sales key                            | BF56                |
| Product key                          | BF7APE              |
| Catalog page                         | Page 533 (C-2-2019) |
| GTIN                                 | 4055626371528       |
| Weight per piece (including packing) | 133.1 g             |
| Weight per piece (excluding packing) | 105 g               |
| Customs tariff number                | 85389099            |
| Country of origin                    | CN                  |

## Technical data


### Product properties

|                     |                            |
|---------------------|----------------------------|
| Product type        | Housing with locking latch |
| Housing type        | Panel mounting base        |
| Product family      | HC-STA-D                   |
| Application         | Standard                   |
| Type                | D50                        |
| Pg screw connection | none                       |

### Data management status

|                  |    |
|------------------|----|
| Article revision | 01 |
|------------------|----|

### Dimensions

|                                 |                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------|
| Dimensional drawing             |  |
| Width                           | 65 mm                                                                               |
| Height                          | 32 mm                                                                               |
| Length                          | 102 mm                                                                              |
| Drill hole distance, horizontal | 92 mm                                                                               |
| Drill hole distance, vertical   | 42 mm                                                                               |
| Hole diameter                   | 4.4 mm                                                                              |

### Installation dimensions

|                               |       |
|-------------------------------|-------|
| Width of the assembly cutout  | 48 mm |
| Length of the assembly cutout | 73 mm |

### Material specifications

|                                        |                                         |
|----------------------------------------|-----------------------------------------|
| Flammability rating according to UL 94 | V0 (Interlock)                          |
| Seal material                          | NBR, conductive                         |
|                                        | NBR, conductive                         |
| Housing material                       | Die-cast aluminum, salt water resistant |
| Housing surface material               | uncoated                                |
| Locking latch material                 | PA                                      |

### Mechanical properties

#### Mechanical data

|              |       |
|--------------|-------|
| Locking type | Latch |
|--------------|-------|

### Connection data

|                   |                                                               |
|-------------------|---------------------------------------------------------------|
| Tightening torque | 0.8 Nm ... 1.2 Nm (For M4 mounting screws on the panel-mount) |
|-------------------|---------------------------------------------------------------|

# HC-STA-D50-BWD-ELC-AL - Housing



1424412

<https://www.phoenixcontact.com/us/products/1424412>

|  |       |
|--|-------|
|  | base) |
|--|-------|

## Environmental and real-life conditions

|                                 |                   |
|---------------------------------|-------------------|
| Ambient conditions              |                   |
| Degree of protection            | IP66              |
|                                 | IP67              |
| Impact strength                 | IK08              |
| Ambient temperature (operation) | -40 °C ... 125 °C |

# HC-STA-D50-BWD-ELC-AL - Housing


1424412

<https://www.phoenixcontact.com/us/products/1424412>




## Drawings

Dimensional drawing

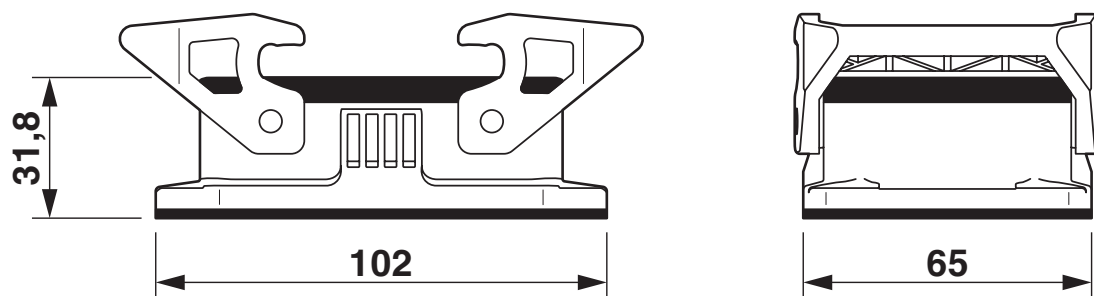

Dimensional drawing

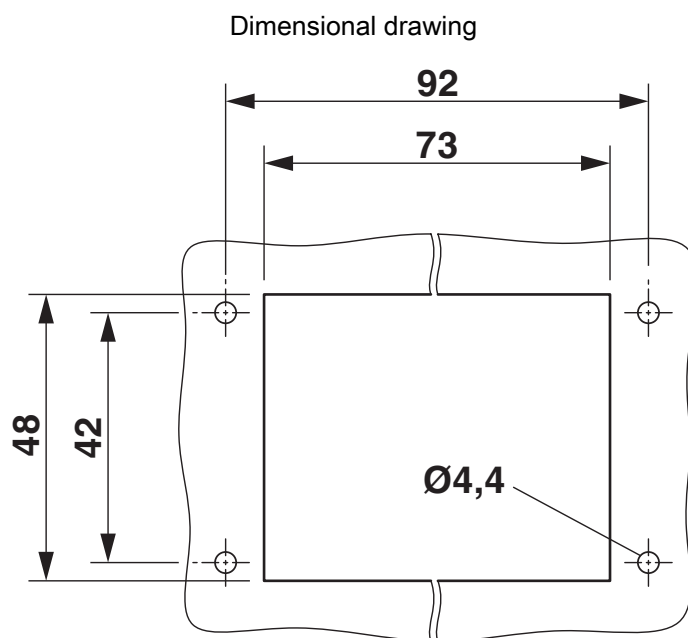

Mounting cutout

1424412

<https://www.phoenixcontact.com/us/products/1424412>


Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1424412>

**DNV**  
Approval ID: TAE000037S

**cUL Recognized**  
Approval ID: E255026

**UL Recognized**  
Approval ID: E255026

**EAC**  
Approval ID: RU C-DE.BL08.B.00511

**cULus Recognized**

# HC-STA-D50-BWD-ELC-AL - Housing



1424412

<https://www.phoenixcontact.com/us/products/1424412>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27440202 |
| ECLASS-12.0 | 27440202 |
| ECLASS-13.0 | 27440202 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC000437 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 31261500 |
|-------------|----------|

# HC-STA-D50-BWD-ELC-AL - Housing



1424412

<https://www.phoenixcontact.com/us/products/1424412>

## Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)