

1456404

https://www.phoenixcontact.com/us/products/1456404

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector front mounting, Universal, 4-position, Socket, straight, M12, coding: D, Front mounting, Square flange, Solder pins, 0.34 mm²

Your advantages

- Easy PCB assembly: one-piece connectors for wave soldering
- Standard pin assignments for signal and power transmission with a uniform design-in design
- · SPEEDCON fast locking system reduces cabling times

Commercial data

Item number	1456404
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	AB24
Product key	ABQEFK
Catalog page	Page 240 (C-2-2013)
GTIN	4046356617017
Weight per piece (including packing)	12.75 g
Weight per piece (excluding packing)	12.09 g
Customs tariff number	85366990
Country of origin	DE



1456404

https://www.phoenixcontact.com/us/products/1456404

Technical data

Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
--------------------	--

Mounting

Mounting type	Front mounting Square flange 20 mm side length
Assembly note	20 mm side length

Product properties

Product type	Circular connectors (device side)
Application	Data
	Signal
Sensor type	Universal
Number of positions	4
No. of cable outlets	1
Shielded	no
Coding	D
Thread type	M12

Data management status

Article revision	06

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	V0
Seal material	FKM
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 6.6
Material for screw connection	Zinc die-cast, nickel-plated

Electrical properties

Rated surge voltage	2.5 kV
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U _N	250 V



1456404

https://www.phoenixcontact.com/us/products/1456404

Nominal current I _N	4 A
Max. conductor resistance	57.6 mΩ/m

Connection data

Conductor connection

Connection method	Solder pins
Contact connection type	Socket
Conductor cross section	0.34 mm²
Tightening torque	3 Nm 4 Nm (Installation-side)

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	> 100
-----------------------------	-------

Connector

Connection 1

Head design	Socket
Head cable outlet	straight
Head thread type	M12
Coding	D

Cable/line

Signal type/category	Universal	
Wire diameter incl. insulation	1.2 mm ±0.07 mm	
Cable cross section	0.34 mm²	
Conductor structure signal line	7x 0.25 mm	
Thickness, insulation	0.21 mm	
Nominal voltage, cable	300 V	
Test voltage, cable	2000 V AC	
Cable resistance	≤ 57.6 mΩ/m	
Cable insulation resistance	≥ 20 MΩ*km	
Ambient temperature (operation)	-40 °C 85 °C (cable, fixed installation)	
	-25 °C 85 °C (Cable, flexible installation)	

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
	IP20
Ambient temperature (operation)	-25 °C 85 °C (Plug / socket)
	-40 °C 85 °C (without mechanical actuation)
	-25 °C 85 °C (Cable, flexible installation)



1456404

https://www.phoenixcontact.com/us/products/1456404


	-40 °C 85 °C (cable, fixed installation)
Standards and regulations	
otandardo ana regulationo	
M12	
-	M12 connector



1456404

https://www.phoenixcontact.com/us/products/1456404

Drawings

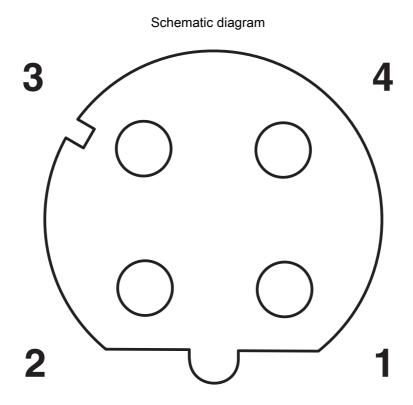

Pin assignment M12 socket, 4-pos., D-coded, female side



1456404

https://www.phoenixcontact.com/us/products/1456404

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1456404

.91	cUL Recognized Approval ID: E118976-20100522			
	Nominal	voltage U _N Nominal cu	rrent I _N Cross section AV	VG Cross section mm ²
	250 V	4 A	22 - 22	-

<i>9</i> 7	UL Recognized Approval ID: E118976-20	0100522			
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
		250 V	4 A	22 - 22	-

c 911 us	cULus Recognized Approval ID: E221474-20140616				
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
		250 V	4 A	-	-

cULus Recognized



1456404

https://www.phoenixcontact.com/us/products/1456404

Classifications

UNSPSC 21.0

ECLASS

27440102
27440116
27440116
EC002635

39121400



1456404

https://www.phoenixcontact.com/us/products/1456404

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes	
Exemption	6(c)	
China RoHS		
Environment friendly use period (EFUP)	EFUP-50	
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.	
EU REACH SVHC		
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)	
SCIP	141e337b-4b1e-4c3a-bdd6-e6c696d3b07b	

Phoenix Contact 2024 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com