

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20



© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASE TO PRODUCTION	23JUN2020	JA	TD
	A1	ECR-23-183736	22AUG2023	PC	TD

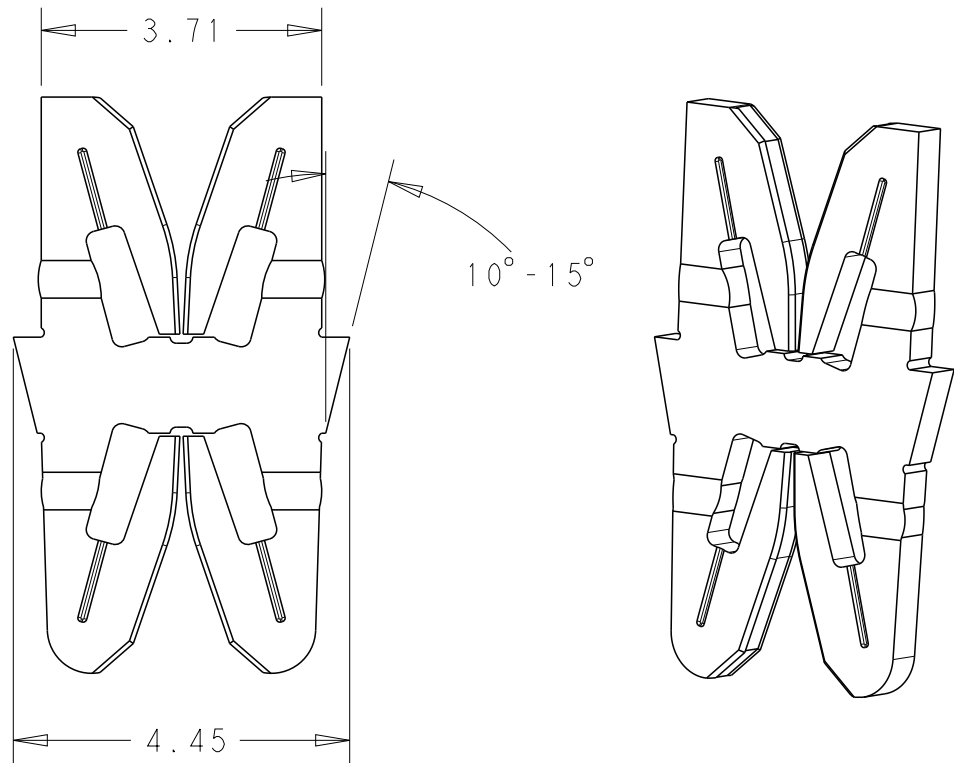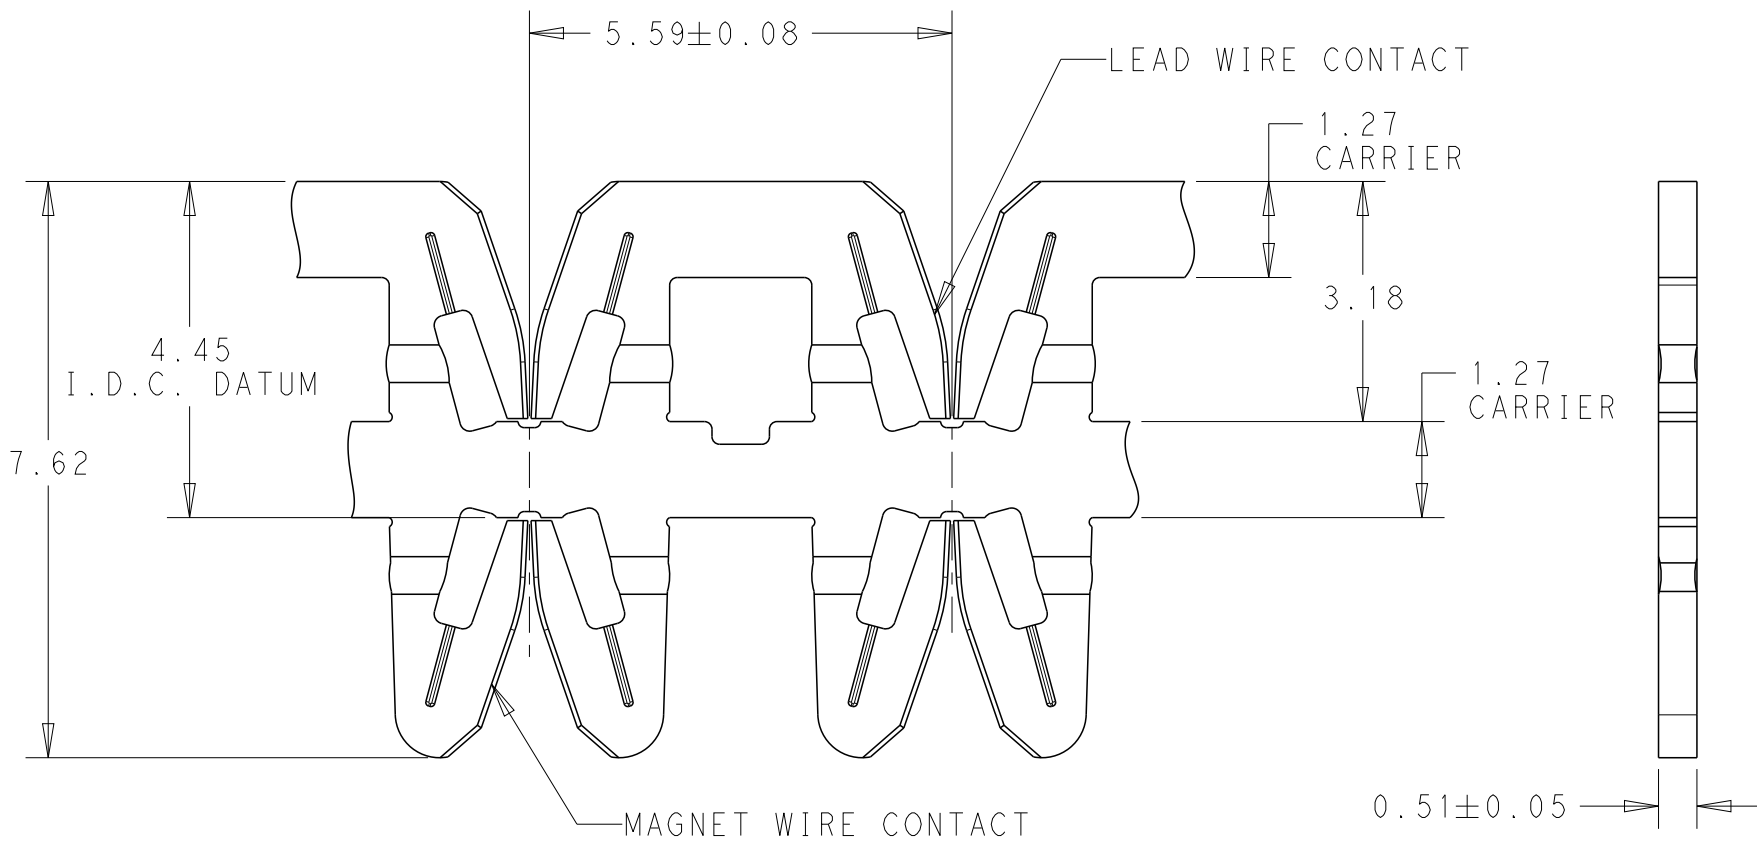


LOOSE PIECE CONFIGURATION
4-2322343-()

TERMINALS TO UNWIND FROM REELS AS SHOWN
2322343-()

NOTES

- SPECIFICATION
MAGNET WIRE 0.40-1.20mm ALUMINUM WIRE
0.3-0.8mm² STRANDED, BONDED OR SOLID WITH PVC INSULATION.
MAXIMUM INSULATION OUTSIDE DIAMETER IS 2.90mm, NO STRIPPING REQUIRED.
- POCKET RECOMMENDATION
1601421 FOR SINGLE TERMINAL
1601433 FOR DOUBLE BUSSED TERMINALS
1601440 FOR TRIPLE BUSSED TERMINALS
- TERMINAL APPLICATION TO COMPLY WITH TE CONNECTIVITY SPECIFICATION 114-13166, FIG. 3

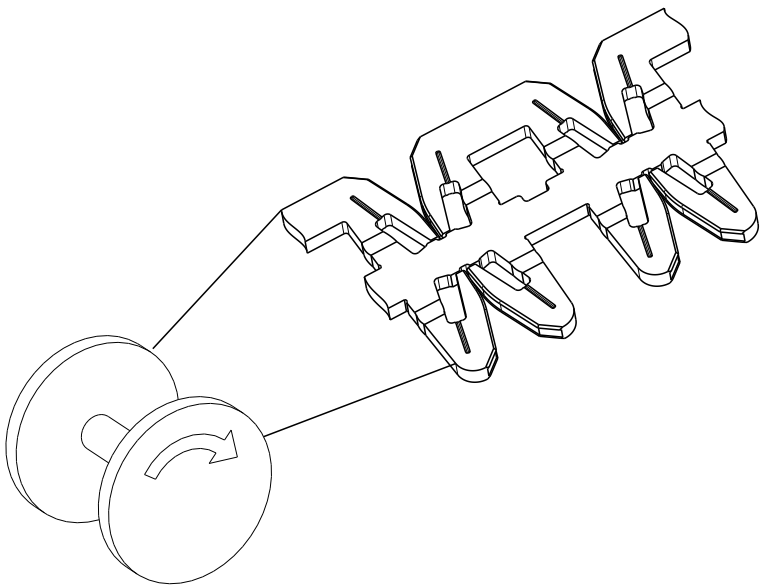

2322343-2
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JUSTIN HUANG 08NOV2018	TE Connectivity		
DIMENSIONS: mm		CHK TIM DING 08NOV2018			
		APVD SENTHIL KUMAR 08NOV2018			
		PRODUCT SPEC 108-2085			
MATERIAL BRASS SPRING HARD		FINISH POST TIN	NAME WIRE TO WIRE, STD SIAMEZE TERMINAL FOR AL WIRE		
			SIZE A3		
			CAGE CODE 00779		
			DRAWING NO C-2322343		
			RESTRICTED TO -		
			SCALE 10:1		
			SHEET 1 OF 1		
			REV A1		