

SACC-CI-M12FSY-8P SMD SH T - Contact carrier

1411965

<https://www.phoenixcontact.com/us/products/1411965>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact carrier, Universal CAT5 (IEC 11801:2002), 8-position, Socket, straight, M12, coding: Y, PCB mounting, SMD reflow, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1238938

Your advantages

- Reduced mounting costs thanks to two-piece device connector
- Packaging available for automated pick and place assembly
- All common pin assignments and codings available
- Easy device integration thanks to mechanical port screw connections with threaded attachment, press-in contour or direct integration in the front plate

Commercial data

Item number	1411965
Packing unit	60 pc
Minimum order quantity	60 pc
Sales key	AB23
Product key	ABQBGG
GTIN	4046356991629
Weight per piece (including packing)	4.596 g
Weight per piece (excluding packing)	4.596 g
Customs tariff number	85366990
Country of origin	DE

SACC-CI-M12FSY-8P SMD SH T - Contact carrier

1411965

<https://www.phoenixcontact.com/us/products/1411965>



Technical data

Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
--------------------	--

Product properties

Product type	Contact insert
Application	Hybrid
Sensor type	Universal
Number of positions	8
Seal present	no
Shielded	yes
Coding	Y
Thread type	M12

Data management status

Article revision	02
------------------	----

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	0.8 kV
Contact resistance	$\leq 3 \text{ m}\Omega$
Insulation resistance	$> 100 \text{ M}\Omega$
Nominal voltage U_N	48 V AC (Power and data) 50 V DC (Power and data)
Nominal current I_N	0.5 A (Data) 6 A (Power)
Transmission medium	Copper
Transmission characteristics (category)	CAT5 (IEC 11801:2002)

Connection data

Connection method	SMD reflow
-------------------	------------

Interfaces

Signal type/category	Universal CAT5 (IEC 11801:2002)
----------------------	---------------------------------

Material specifications

Material	Die-cast zinc, nickel-plated (Shield crossover)
----------	---

SACC-CI-M12FSY-8P SMD SH T - Contact carrier

1411965

<https://www.phoenixcontact.com/us/products/1411965>



Flammability rating according to UL 94	V0
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA

Connector

Connection 1

Head design	Socket
Head cable outlet	straight
Head thread type	M12
Coding	Y

Cable/line

Signal type/category	Universal CAT5 (IEC 11801:2002)
----------------------	---------------------------------

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	> 100
-----------------------------	-------

Environmental and real-life conditions

Ambient conditions

Degree of protection (when plugged in)	IP67 (correctly plugged in and locked)
Degree of protection	IP67 (correctly plugged in and locked)
	IP67, when plugged in
Ambient temperature (operation)	-25 °C ... 105 °C (Plug / socket)
	-55 °C ... 105 °C (without mechanical actuation)

Mounting

Mounting type	PCB mounting
---------------	--------------

Packaging specifications

Type of packaging	Tray
Delivery state	with assembly pad


SACC-CI-M12FSY-8P SMD SH T - Contact carrier

1411965

<https://www.phoenixcontact.com/us/products/1411965>



Drawings

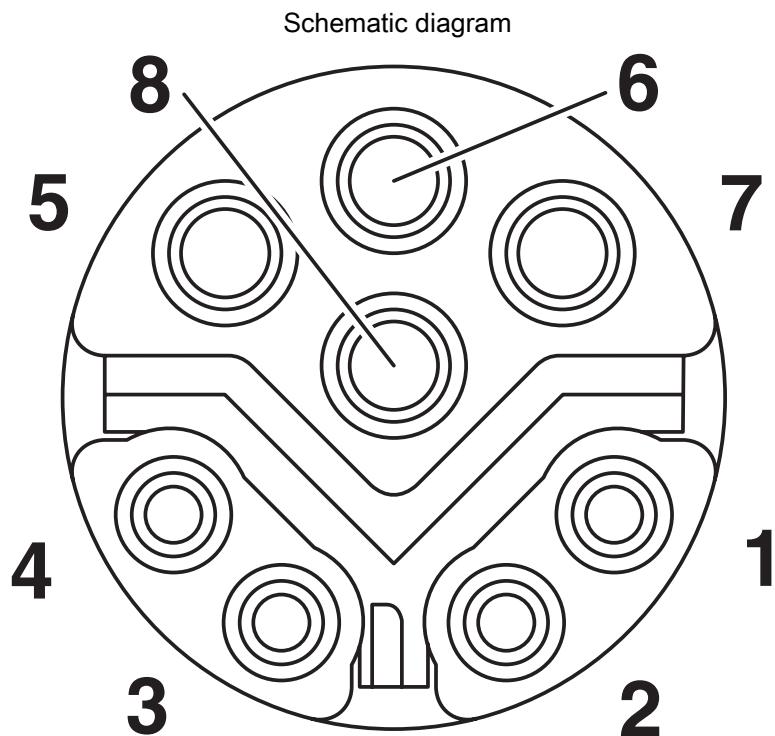

Pin assignment M12 connector, 8-pos., view socket side

SACC-CI-M12FSY-8P SMD SH T - Contact carrier

1411965

<https://www.phoenixcontact.com/us/products/1411965>



Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1411965>

cUL Recognized Approval ID: E335024-20120308				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Power	56 V	0.175 A	-	-
Data	30 V	0.5 A	-	-

UL Recognized Approval ID: E335024-20120308				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Power	56 V	0.175 A	-	-
Data	30 V	0.5 A	-	-

cULus Recognized

SACC-CI-M12FSY-8P SMD SH T - Contact carrier

1411965

<https://www.phoenixcontact.com/us/products/1411965>



Classifications

ECLASS

ECLASS-11.0	27440110
ECLASS-12.0	27440110
ECLASS-13.0	27440110

ETIM

ETIM 9.0	EC003568
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

SACC-CI-M12FSY-8P SMD SH T - Contact carrier

1411965

<https://www.phoenixcontact.com/us/products/1411965>



Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.	

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	f232393f-12d1-4242-a210-a1c1eff5d47c

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA

586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com