

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Device connector front mounting, series: CA, straight, shielded: yes, for standard and SPEEDCON interlock, No. of pos.: 16, Direction of rotation: Standard, contact connection type: Socket, Solder connection, Axial seal, Central fastening M20 x 1.5, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1243860

Your advantages

- Safe use in the field, thanks to high degree of protection
- Connector for flexible on-site assembly
- Consistent EMC protection for reliable transmission of signals
- Solder connection: proven connection technology for various litz wires
- Application-specific wall mounting optionally with thread or anti-rotation protection and lock nut

Commercial data

Item number	1619861
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB31
Product key	ABRAEL
GTIN	4046356821056
Weight per piece (including packing)	29.7 g
Weight per piece (excluding packing)	26.8 g
Customs tariff number	85366990
Country of origin	DE

# CA-16S1N126Y00 - Device connector front mounting



1619861

<https://www.phoenixcontact.com/us/products/1619861>

## Technical data

### Product properties

Product type	Circular connectors (device side)
Data management status	
Article revision	05

### Connector

Insulating body	
Coding	N
Insulation body material	PBT
Contact material	CuZn
Contact surface material	Ni/Au
Insertion/withdrawal cycles	100
Connection method	Solder connection
Contact switching type	Socket
Application	Signal
Number of positions	16
Direction of rotation	Standard
Connection profile	16
Rated voltage	48 V AC
	74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3
Contact diameter	1 mm
Litz wire cross-section	1 mm <sup>2</sup>
Nominal current per signal contact	8 A

### Housing

Order information:	If necessary, order locking nut separately
Housing material	GD-Zn
Type of locking	for standard and SPEEDCON interlock
Pg screw connection	none
Degree of protection (plugged in)	IP67
Thread type	M23


### Environmental and real-life conditions

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------


## Drawings

Dimensional drawing

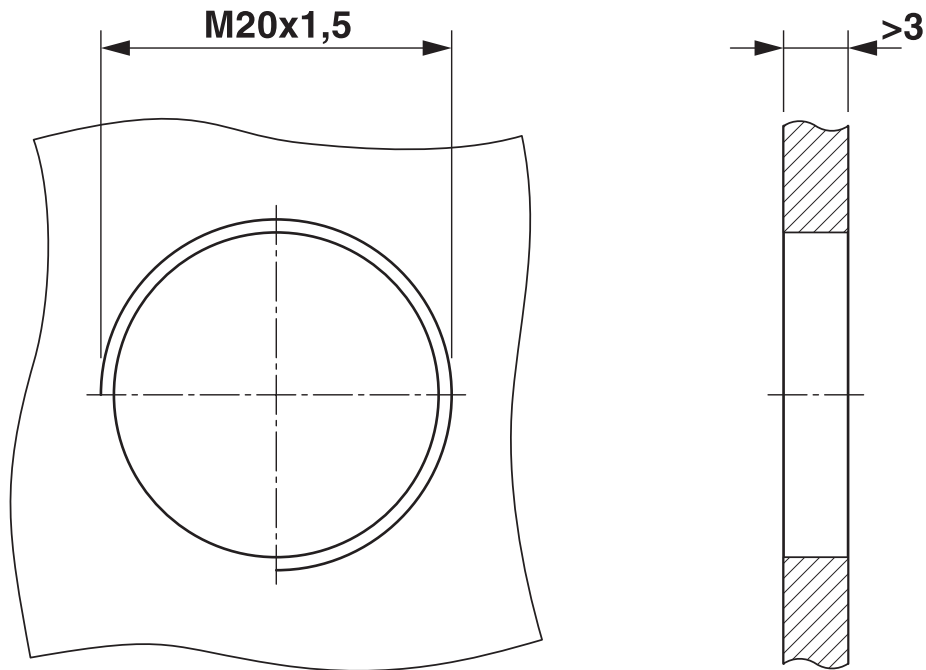

Installation dimensions


Schematic diagram

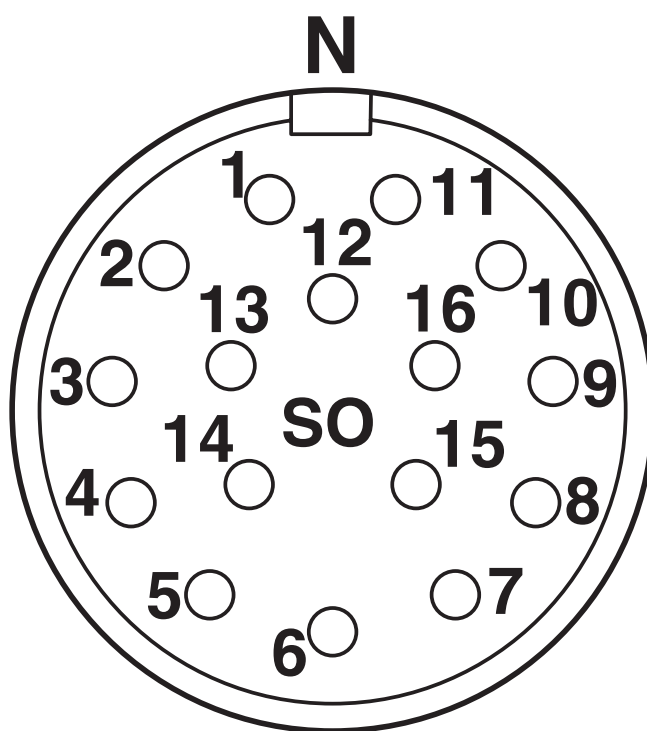


Connector pin assignment

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1619861>

<div> <b>cUL Recognized</b> Approval ID: E335019-20141210</div>				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	48 V	5 A	18 - 18	-

<div> <b>UL Recognized</b> Approval ID: E335019-20141210</div>				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	48 V	8 A	18 - 18	-

<b>cULus Recognized</b>				
-------------------------	--	--	--	--

# CA-16S1N126Y00 - Device connector front mounting



1619861

<https://www.phoenixcontact.com/us/products/1619861>

## Classifications

### ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

### ETIM

ETIM 9.0	EC002635
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# CA-16S1N126Y00 - Device connector front mounting



1619861  
<https://www.phoenixcontact.com/us/products/1619861>

## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	e554c0eb-b568-425e-a78e-7c840d556c03

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)