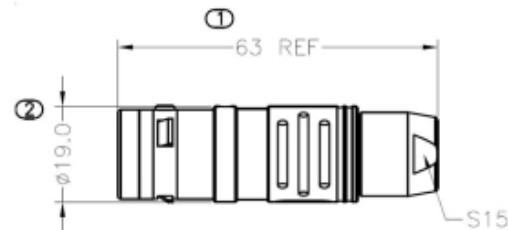


Product Name // 18 Contacts Straight Plug 3Y Series Push Pull Connector
[View Product Page](#)
** Representative product image only*

// Product Description:

- ◊ 18 Contacts Straight Plug 3Y Series Push Pull Connector
- ◊ Available in Fixed Socket version
- ◊ ROHS compliance
- ◊ IP66 rated
- ◊ Temp:-50 C to +200 C
- ◊ Solder Terminals
- ◊ Durability >4500 cycles
- ◊ Operating humidity up to 95%
- ◊ Salt Spray Corrosion Test >144h
- ◊ High packing density for space savings on panel mounts

// General Information:

| | |
|---------------------------------|---|
| Product Display Title: | 3Y Series Straight Plug Push Pull Connector |
| Product Family: | Circular Automation Connectors |
| Product Series: | Push Pull Connectors Y Series |
| Contact Pin Material: | Brass gold plated 3u" |
| Current Max: | 7A |
| Diameter Over Coupling Ring Mm: | 19mm |
| Durability: | >4500 cycles |
| Function: | Straight Plug Push Pull Connector |
| Insulator: | PPS |
| Ip Rating: | IP66 |
| Locking Sleeve Material: | Brass plated |
| Max Cable Entry Size: | 8.0mm |
| Min Cable Entry Size: | 7.6mm |
| Max Contact Accomodation Awg: | 22AWG |
| Max Contact Accomodation Mm2: | 0.34mm2 |
| Max Operating Temperature: | +200°C |
| Min Operating Temperature: | -50°C |
| Number Of Contacts: | 18 Contacts |
| Operating Humidity: | 0.95 |
| Pin Pin Terminal Voltage: | 1200V |
| Pin Shell Terminal Voltage: | 1050V |
| Push Pull Connector Series: | 3Y Series |
| Rohs Compliant: | Yes |
| Salt Spray Corrosion Test: | 48h |
| Shielding Efficiency Min: | 95dB |
| Shielding Efficiency Max: | 80dB |
| Shock Resistance: | 100g |
| Terminal Diameter: | 0.9mm |
| Vibration Resistance Min: | 10Hz |
| Vibration Resistance Max: | 2000Hz |

// Product PDF Links
[Push-Pull Connector Y Series...](#)
// Product 3D CAD Model Links
[PPCFGG3K18CLAD3D CAD Model](#)

 Have a question or project enquiry
 you'd like to talk to us about?

[Click Here To Contact Us](#)