

HC-ADV-B16-HHWH-1STM25-EMC-AL - Housing



1414978

<https://www.phoenixcontact.com/us/products/1414978>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



HEAVYCON ADVANCE sleeve housing, B16, with stainless steel screw locking (Allen screw), salt-water-resistant aluminum, height 93.7 mm, with thread, 1x M25, lateral cable outlet, without surface, conductive seal (EMC properties)

Commercial data

| | |
|--------------------------------------|---------------------|
| Item number | 1414978 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | BF58 |
| Product key | BF7APH |
| Catalog page | Page 617 (C-2-2019) |
| GTIN | 4055626035956 |
| Weight per piece (including packing) | 334 g |
| Weight per piece (excluding packing) | 315.1 g |
| Customs tariff number | 85389099 |
| Country of origin | CN |

1414978

<https://www.phoenixcontact.com/us/products/1414978>

Technical data

Notes

| | |
|---------|---|
| General | For contact inserts HC-B16, BB32, D40, DD72, HS6, HV6, M, K |
|---------|---|

Product properties

| | |
|------------------------------|-----------------------------------|
| Product type | Housing with screw locking |
| Housing type | Sleeve housing |
| Product family | HC-ADV |
| Application | Offshore/EMC |
| Type | B16 |
| No. of cable outlets | 1 |
| Type of the screw connection | 1x M25 |
| Type | Tall design |
| Fixing screws | M6 (screw head: 5 mm Allen screw) |
| Cable outlet | lateral |
| Pg screw connection | none |


Data management status

| | |
|------------------|----|
| Article revision | 02 |
|------------------|----|

Connection data

| | |
|-------------------|--|
| Tightening torque | 3 Nm ... 5 Nm (for M6 mounting screws on the sleeve housing) |
|-------------------|--|

Dimensions

| | |
|---------------------|--|
| Dimensional drawing |  |
| Width | 57 mm |
| Height | 93.7 mm |
| Length | 125.5 mm |

Installation dimensions

| | |
|-------------------------------|-------|
| Width of the assembly cutout | 35 mm |
| Length of the assembly cutout | 86 mm |

Material specifications

| | |
|--------------------------|---|
| Seal material | NBR, conductive |
| Housing material | Die-cast aluminum, salt water resistant |
| Housing surface material | uncoated |
| Locking latch material | Stainless steel |

Environmental and real-life conditions

HC-ADV-B16-HHWH-1STM25-EMC-AL - Housing



1414978

<https://www.phoenixcontact.com/us/products/1414978>

Ambient conditions

| | |
|---------------------------------|--------------------------|
| Degree of protection | IP66 |
| | IP68 (0.2 bar/24 h) |
| | IP69 (ISO 20653:2013-02) |
| Enclosure rating (NEMA) | 4 (UL 50e) |
| | 4X (UL 50e) |
| | 12 (UL 50e) |
| Impact strength | IK09 |
| Ambient temperature (operation) | -40 °C ... 125 °C |

Mechanical properties

Mechanical data


| | |
|------------------------------|--------|
| Type of the screw connection | 1x M25 |
| Locking type | Screw |

Mounting

| | |
|---------------|-----------------------------------|
| Fixing screws | M6 (screw head: 5 mm Allen screw) |
|---------------|-----------------------------------|

Drawings

Dimensional drawing

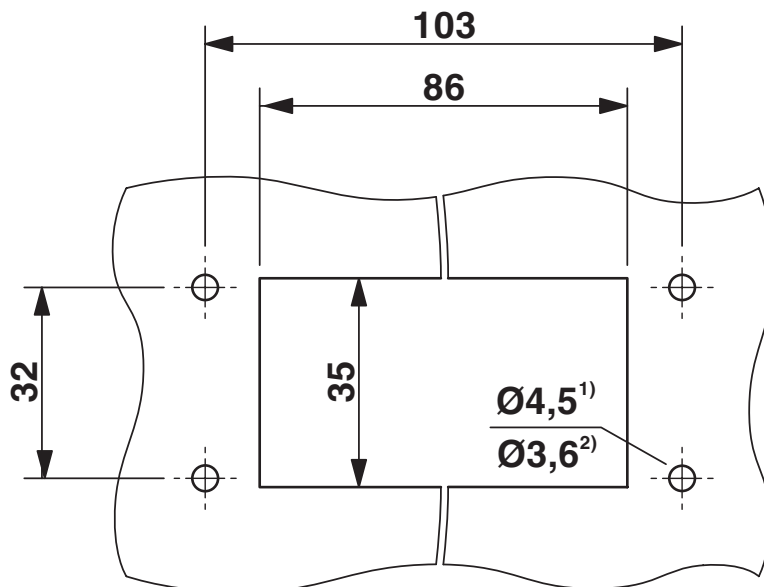


Mounting cutout

1) when M4 screws are used

2) when self-tapping Torx® screws are used (Torx® 20, M4)

Dimensional drawing

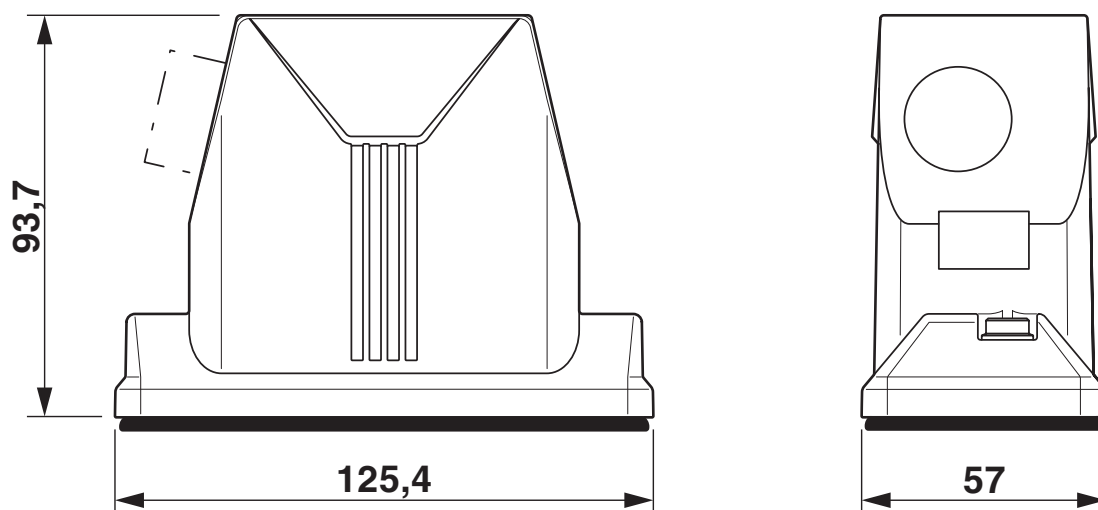

Dimensional drawing

1414978

<https://www.phoenixcontact.com/us/products/1414978>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1414978>



DNV
Approval ID: TAE000037S



cUL Recognized
Approval ID: E255026



UL Recognized
Approval ID: E255026



EAC
Approval ID: RU C-DE.BL08.B.00511

cULus Recognized

1414978

<https://www.phoenixcontact.com/us/products/1414978>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27440202 |
| ECLASS-12.0 | 27440202 |
| ECLASS-13.0 | 27440202 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC000437 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 31261500 |
|-------------|----------|

Environmental product compliance

| | |
|---|--|
| EU RoHS | |
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
| China RoHS | |
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |
| EU REACH SVHC | |
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |