


General information

Part number	S23F2C-P24MFG0-700S	 <small>Illustrations may differ from original product. Dimensions, unless otherwise specified, in mm.</small>
Termination	solder	
Size	3	
Locking principle	push	
Coding	2_halfshell	
Cable Diameter	cable_mini_70	
Cable outlet	bend_relief	

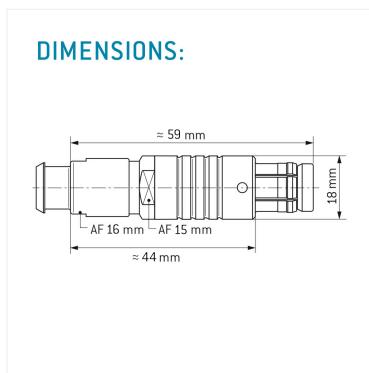

Contact insert description

Number of contacts	24
Contact type	pins
Contact diameter	07mm
Insulator material	peek
Wire cross section	22_awg
Termination	solder
Termination diameter	085mm

reverse gender on request

Technical information

Max. creepage and air clearance distance	05_mm	07_mm
Nominal current single contact	075_a	iec_60512_5_2
Nominal current insert	3 A	vde_0298_4
Test voltage	09_kv_ac	sae_13441
safety_text		

Mechanical and environmental data

Degree of protection*	ip50
Operating temperature	40_120_c
Mating cycles	5000

mated_unmated

Material and surface treatments

Housing	m_chrome
Contact	cu_alloy_gold

safety_text_2

ul_text

illustrative_text