

# High Voltage Standard Rectifier Module

$$V_{RRM} = 2 \times 3400 \text{ V}$$

$$I_{FAV} = 240 \text{ A}$$

$$V_F = 1,01 \text{ V}$$

Phase leg


Part number

**MDD175-34N1**



Backside: isolated

 E72873

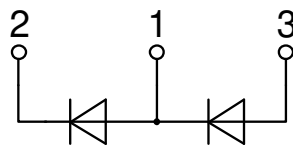

## Features / Advantages:

- Planar passivated chips
- Very low leakage current
- Very low forward voltage drop
- Improved thermal behaviour

## Applications:

- Diode for main rectification
- For single and three phase bridge configurations
- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

## Package: Y1


- Isolation Voltage: 4800 V~
- Industry standard outline
- RoHS compliant
- Base plate: Copper internally DCB isolated
- Advanced power cycling
- Phase Change Material available

## Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).

| Rectifier  |                                              |                                         |                                | Ratings                        |      |       |      |
|------------|----------------------------------------------|-----------------------------------------|--------------------------------|--------------------------------|------|-------|------|
| Symbol     | Definition                                   | Conditions                              |                                | min.                           | typ. | max.  | Unit |
| $V_{RSM}$  | max. non-repetitive reverse blocking voltage | $T_{VJ} = 25^{\circ}\text{C}$           |                                |                                |      | 3500  | V    |
| $V_{RRM}$  | max. repetitive reverse blocking voltage     | $T_{VJ} = 25^{\circ}\text{C}$           |                                |                                |      | 3400  | V    |
| $I_R$      | reverse current                              | $V_R = 3400\text{ V}$                   | $T_{VJ} = 25^{\circ}\text{C}$  |                                |      | 1     | mA   |
|            |                                              | $V_R = 3400\text{ V}$                   | $T_{VJ} = 150^{\circ}\text{C}$ |                                |      | 5     | mA   |
| $V_F$      | forward voltage drop                         | $I_F = 200\text{ A}$                    | $T_{VJ} = 25^{\circ}\text{C}$  |                                |      | 1,07  | V    |
|            |                                              | $I_F = 400\text{ A}$                    |                                |                                |      | 1,26  | V    |
|            |                                              | $I_F = 200\text{ A}$                    | $T_{VJ} = 125^{\circ}\text{C}$ |                                |      | 1,01  | V    |
|            |                                              | $I_F = 400\text{ A}$                    |                                |                                |      | 1,26  | V    |
| $I_{FAV}$  | average forward current                      | $T_C = 100^{\circ}\text{C}$             | $T_{VJ} = 150^{\circ}\text{C}$ |                                |      | 240   | A    |
|            |                                              | 180° sine      d = 0.5                  |                                |                                |      |       |      |
| $V_{F0}$   | threshold voltage                            | } for power loss calculation only       |                                | $T_{VJ} = 150^{\circ}\text{C}$ |      | 0,74  | V    |
| $r_F$      | slope resistance                             |                                         |                                |                                |      | 1,27  | mΩ   |
| $R_{thJC}$ | thermal resistance junction to case          |                                         |                                |                                |      | 0,14  | K/W  |
| $R_{thCH}$ | thermal resistance case to heatsink          |                                         |                                |                                | 0,04 |       | K/W  |
| $P_{tot}$  | total power dissipation                      | $T_C = 25^{\circ}\text{C}$              |                                |                                |      | 900   | W    |
| $I_{FSM}$  | max. forward surge current                   | t = 10 ms; (50 Hz), sine                | $T_{VJ} = 45^{\circ}\text{C}$  |                                |      | 8,50  | kA   |
|            |                                              | t = 8,3 ms; (60 Hz), sine               | $V_R = 0\text{ V}$             |                                |      | 9,18  | kA   |
|            |                                              | t = 10 ms; (50 Hz), sine                | $T_{VJ} = 150^{\circ}\text{C}$ |                                |      | 7,23  | kA   |
|            |                                              | t = 8,3 ms; (60 Hz), sine               | $V_R = 0\text{ V}$             |                                |      | 7,81  | kA   |
| $I^2t$     | value for fusing                             | t = 10 ms; (50 Hz), sine                | $T_{VJ} = 45^{\circ}\text{C}$  |                                |      | 361,3 | kA²s |
|            |                                              | t = 8,3 ms; (60 Hz), sine               | $V_R = 0\text{ V}$             |                                |      | 350,6 | kA²s |
|            |                                              | t = 10 ms; (50 Hz), sine                | $T_{VJ} = 150^{\circ}\text{C}$ |                                |      | 261,0 | kA²s |
|            |                                              | t = 8,3 ms; (60 Hz), sine               | $V_R = 0\text{ V}$             |                                |      | 253,4 | kA²s |
| $C_J$      | junction capacitance                         | $V_R = 1100\text{ V}; f = 1\text{ MHz}$ |                                |                                | 182  |       | pF   |

| Package Y1    |                                                              |                      | Ratings |      |      |      |
|---------------|--------------------------------------------------------------|----------------------|---------|------|------|------|
| Symbol        | Definition                                                   | Conditions           | min.    | typ. | max. | Unit |
| $I_{RMS}$     | RMS current                                                  | per terminal         |         |      | 600  | A    |
| $T_{VJ}$      | virtual junction temperature                                 |                      | -40     |      | 150  | °C   |
| $T_{op}$      | operation temperature                                        |                      | -40     |      | 125  | °C   |
| $T_{stg}$     | storage temperature                                          |                      | -40     |      | 125  | °C   |
| <b>Weight</b> |                                                              |                      |         | 680  |      | g    |
| $M_D$         | mounting torque                                              |                      | 4,5     |      | 7    | Nm   |
| $M_T$         | terminal torque                                              |                      | 11      |      | 13   | Nm   |
| $d_{Spp/App}$ | creepage distance on surface   striking distance through air | terminal to terminal | 16,0    |      |      | mm   |
| $d_{Spb/Apb}$ |                                                              | terminal to backside | 16,0    |      |      | mm   |
| $V_{ISOL}$    | isolation voltage                                            | t = 1 second         | 4800    |      |      | V    |
|               |                                                              | t = 1 minute         | 4000    |      |      | V    |

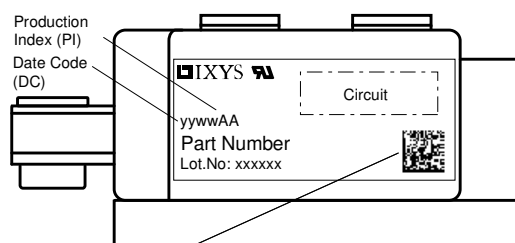


Data Matrix: part no. (1-19), DC + PI (20-25), lot.no.# (26-31), blank (32), serial no.# (33-36)

| Ordering | Ordering Number | Marking on Product | Delivery Mode | Quantity | Code No. |
|----------|-----------------|--------------------|---------------|----------|----------|
| Standard | MDD175-34N1     | MDD175-34N1        | Box           | 3        | 504075   |

### Equivalent Circuits for Simulation

\* on die level

$T_{VJ} = 150^{\circ}\text{C}$



**Rectifier**

|             |                    |      |    |
|-------------|--------------------|------|----|
| $V_{0\max}$ | threshold voltage  | 0,74 | V  |
| $R_{0\max}$ | slope resistance * | 0,75 | mΩ |

Technical drawing of a mechanical component, showing three views: front view, top view, and a schematic diagram.

**Front View (Top):** Shows the component's profile. Dimensions include a total width of  $52^{+0}_{-1,4}$ , a central slot width of  $32^{+0}_{-1,9}$ , and a total height of  $43 \pm 0,5$ . The component features three mounting holes labeled "3x M8".

**Top View (Bottom):** Shows the component's top surface. Dimensions include a total length of  $115 \pm 0,5$ , a total width of  $50 \pm 0,5$ , and a central slot width of  $45 \pm 0,2$ . The component features three mounting holes labeled "1", "2", and "3". The distance between the centers of the outer holes is  $80 \pm 0,2$ , and the distance between the center of the outer hole and the center of the inner hole is  $92 \pm 0,5$ . The distance between the centers of the two outer holes is  $20$ , and the distance between the center of the outer hole and the center of the inner hole is  $22,5$ . The distance between the centers of the two inner holes is  $35$ , and the distance between the center of the inner hole and the center of the outer hole is  $28,5$ . The distance between the centers of the two outer holes is  $12,5$ , and the distance between the center of the outer hole and the center of the inner hole is  $12,5$ . The distance between the centers of the two inner holes is  $6,2$ .

**Schematic Diagram (Bottom):** Shows the electrical connection of the three terminals. Terminal 1 is connected to a common ground. Terminal 2 is connected to a diode. Terminal 3 is connected to a diode.

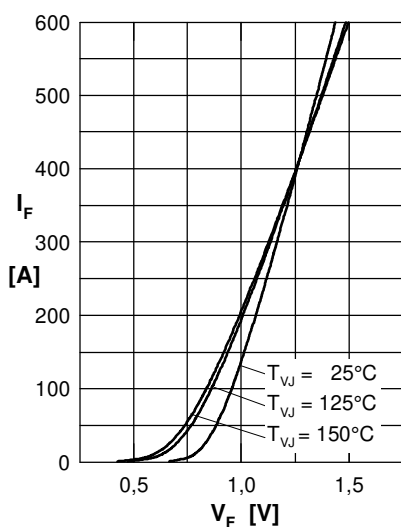
**Rectifier**


Fig. 1 Forward current versus voltage drop per diode

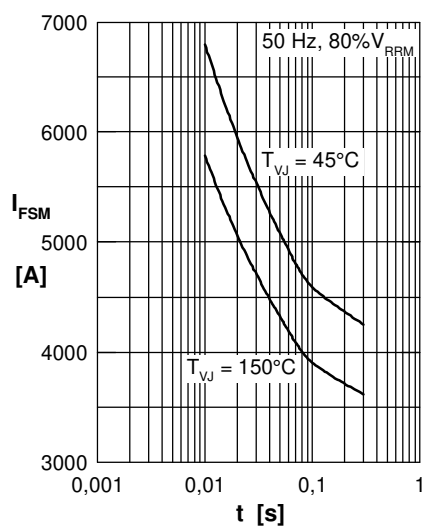


Fig. 2 Surge overload current

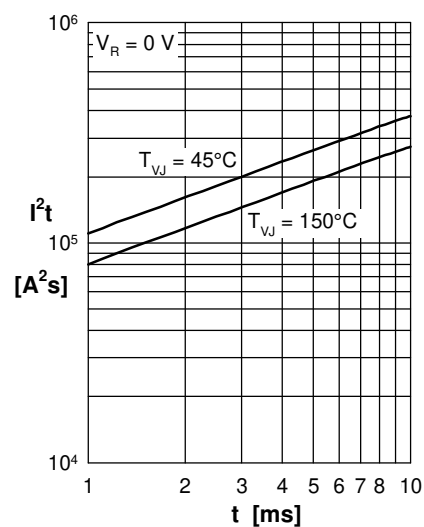
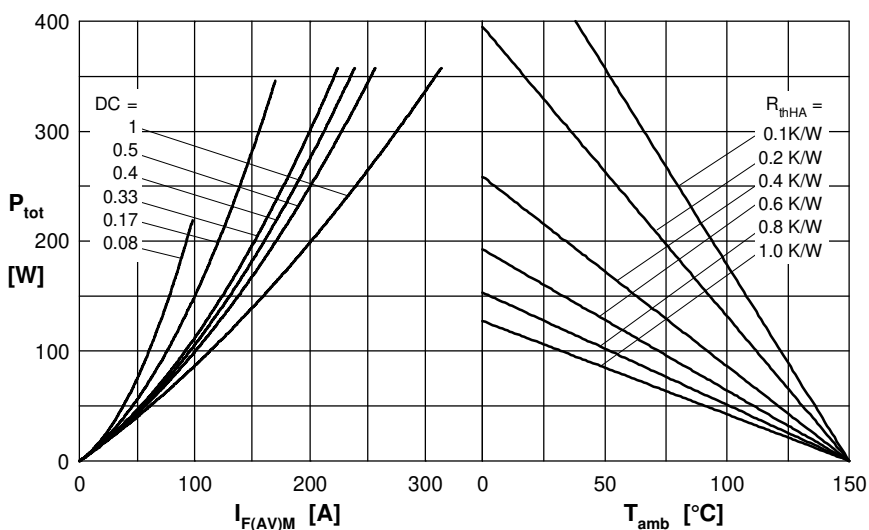

 Fig. 3  $I^2t$  versus time per diode


Fig. 4 Power dissipation vs. direct output current and ambient temperature

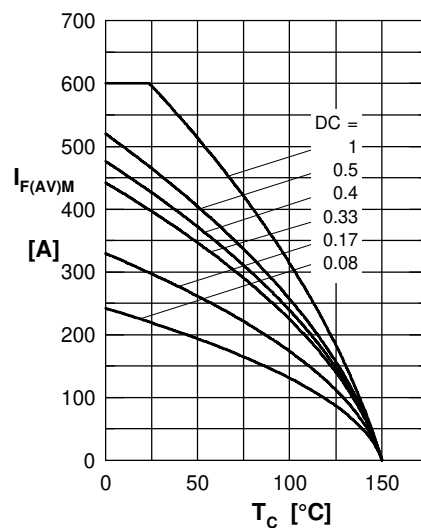


Fig. 5 Max. forward current vs. case temperature

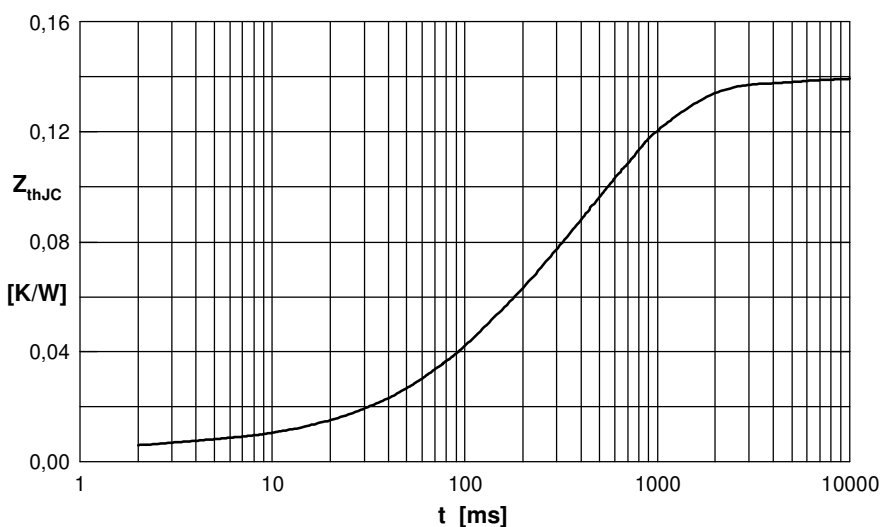


Fig. 6 Transient thermal impedance junction to case

 Constants for  $Z_{thJC}$  calculation:

| i | $R_{thi}$ (K/W) | $t_i$ (s) |
|---|-----------------|-----------|
| 1 | 0.0058          | 0.001     |
| 2 | 0.0310          | 0.120     |
| 3 | 0.0980          | 0.800     |
| 4 | 0.0052          | 0.700     |