

### AMP | AMP CPC

TE Internal #: 788153-2

Housing, 600 VDC, Wire-to-Wire, 4 Position, Sealable, Wire &

Cable, Plug, Reverse Gender, Pin, Signal, Black, AMP CPC, Circular

Power Connectors

View on TE.com >



Connectors > Power Connectors > Circular Power > Circular Power Connectors > One-Piece Connector, Sealed, CPC Series 1











Connector Product Type: Housing

Operating Voltage: 600 VDC

Connector System: Wire-to-Wire

Number of Positions: 4

Sealable: Yes

All One-Piece Connector, Sealed, CPC Series 1 (33)

## **Features**

## **Product Type Features**

Connector Seal & Plug Type	Wire Entry Seal
Connector Product Type	Housing
Connector System	Wire-to-Wire
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Connector & Housing Type	Plug
Circular Connector Shell Type	All Plastic

## **Configuration Features**

Reverse Numbering	With
Number of Positions	4
Number of Power Positions	0
Number of Signal Positions	4



## **Electrical Characteristics**

Operating Voltage	600 VAC
Contact Features	
Reverse Gender	Yes
Contact Type	Pin
Contact Protection	With
Mechanical Attachment	
Mating Alignment Type	Keyed
Mating Alignment	With
Mating Retention Type	Threaded Coupling
Thread Size	5/8-24 UNEF-2A
Polarization Code	A
Connector Mounting Type	Cable Mount (Free-Hanging)
Mating Retention	With
Panel Mount Feature	Without
Housing Features	
Housing Features  Body Orientation	Straight
	Straight Black
Body Orientation	
Body Orientation  Housing Color	Black
Body Orientation  Housing Color  Housing Material	Black Nylon 6/6
Body Orientation  Housing Color  Housing Material  Circular Connector Shell Size	Black Nylon 6/6
Body Orientation  Housing Color  Housing Material  Circular Connector Shell Size  Usage Conditions	Black Nylon 6/6 11
Body Orientation  Housing Color  Housing Material  Circular Connector Shell Size  Usage Conditions  Operating Temperature Range	Black  Nylon 6/6  11  -55 – 105 °C[-67 – 221 °F]
Body Orientation  Housing Color  Housing Material  Circular Connector Shell Size  Usage Conditions  Operating Temperature Range  Fluid Resistance	Black  Nylon 6/6  11  -55 – 105 °C[-67 – 221 °F]
Body Orientation  Housing Color  Housing Material  Circular Connector Shell Size  Usage Conditions  Operating Temperature Range  Fluid Resistance  Operation/Application	Black Nylon 6/6  11  -55 – 105 °C[-67 – 221 °F] Immersion
Body Orientation  Housing Color  Housing Material  Circular Connector Shell Size  Usage Conditions  Operating Temperature Range  Fluid Resistance  Operation/Application  Circuit Application	Black  Nylon 6/6  11  -55 – 105 °C[-67 – 221 °F]  Immersion  Signal
Body Orientation  Housing Color  Housing Material  Circular Connector Shell Size  Usage Conditions  Operating Temperature Range  Fluid Resistance  Operation/Application  Circuit Application  Shielded	Black  Nylon 6/6  11  -55 – 105 °C[-67 – 221 °F]  Immersion  Signal
Body Orientation  Housing Color  Housing Material  Circular Connector Shell Size  Usage Conditions  Operating Temperature Range  Fluid Resistance  Operation/Application  Circuit Application  Shielded  Industry Standards	Black  Nylon 6/6  11  -55 – 105 °C[-67 – 221 °F]  Immersion  Signal  No
Body Orientation  Housing Color  Housing Material  Circular Connector Shell Size  Usage Conditions  Operating Temperature Range  Fluid Resistance  Operation/Application  Circuit Application  Shielded  Industry Standards  UL Flammability Rating	Black  Nylon 6/6  11  -55 – 105 °C[-67 – 221 °F]  Immersion  Signal  No



# **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**









TE Part # CAT-AM71-C83998Y One-Piece Connector, Sealed, CPC Series 1





TE Part # CAT-AM71-T98
Pin and Socket Contacts, Type II



TE Part # 206516-1 CPC PLUG ASSEMBLY SIZE 11-4







TE Part # CAT-AM71-T98D Pin and Socket Contacts, Type III, LP **EMEA** 



TE Part # CAT-AM71-T98A Strip Pin and Socket Contacts, Type III,



TE Part # CAT-AM71-T98G Pin and Socket Contacts, Type III, LP, High Current



TE Part # CAT-AM71-T98B Strip Pin and Socket Contacts, Type III



TE Part # CAT-AM71-T98F Strip Pin and Socket Contacts, Type III, High Current



TE Part # 81665-3 ECONOSEAL, FLANGE GASKET



TE Part # 91542-1 CCII TYPE III+ PIN SKT 24-22 ASSY





CCII TYPE III+ PIN SKT 18-14 ASSY



TE Part # 91505-1 CCII TYPE III+ 24-16 ASSY



TE Part # 58495-1 PRO CRIMPER ASSY MULTIMATE



Also in the Series | AMP CPC



Circular Power Connectors(458)



Connector Backshells(1)



Connector Caps & Covers(19)



Connector Contacts(6)



Connector Hardware(12)



Connector Seals & Cavity Plugs(36)




Connector Strain Relief(60)



Insertion & Extraction Tools(1)



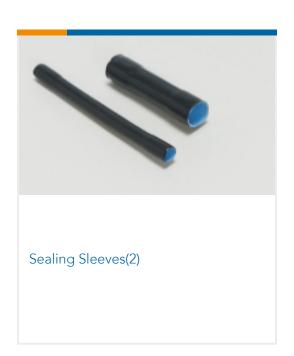

# Customers Also Bought

















## **Documents**

**Product Drawings** 

SLD CPC PLUG ASSY,11-4,REV SEX

English

**CAD Files** 

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_788153-2\_A.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_788153-2\_A.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_788153-2\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Housing, 600 VDC, Wire-to-Wire, 4 Position, Sealable, Wire & Cable, Plug, Reverse Gender, Pin, Signal, Black, AMP CPC, Circular Power Connectors



## Datasheets & Catalog Pages

AMP Circular Connectors for Commercial Signal & Power Applications

English

**Product Specifications** 

**Product Specification** 

English