

6-1423008-6 ACTIVE


TE Internal #: 6-1423008-6

General Purpose Power Relay, Monostable, 1.7 W Coil, 86 ohm Coil
Resistance, UL Coil Insulation Class F, 12 VDC Coil Voltage, Power
Relays

[View on TE.com >](#)



Relays & Contactors > Relays > Power Relays > 2 Pole Relays: Power Relays, Standard, Monostable, 1700 mW

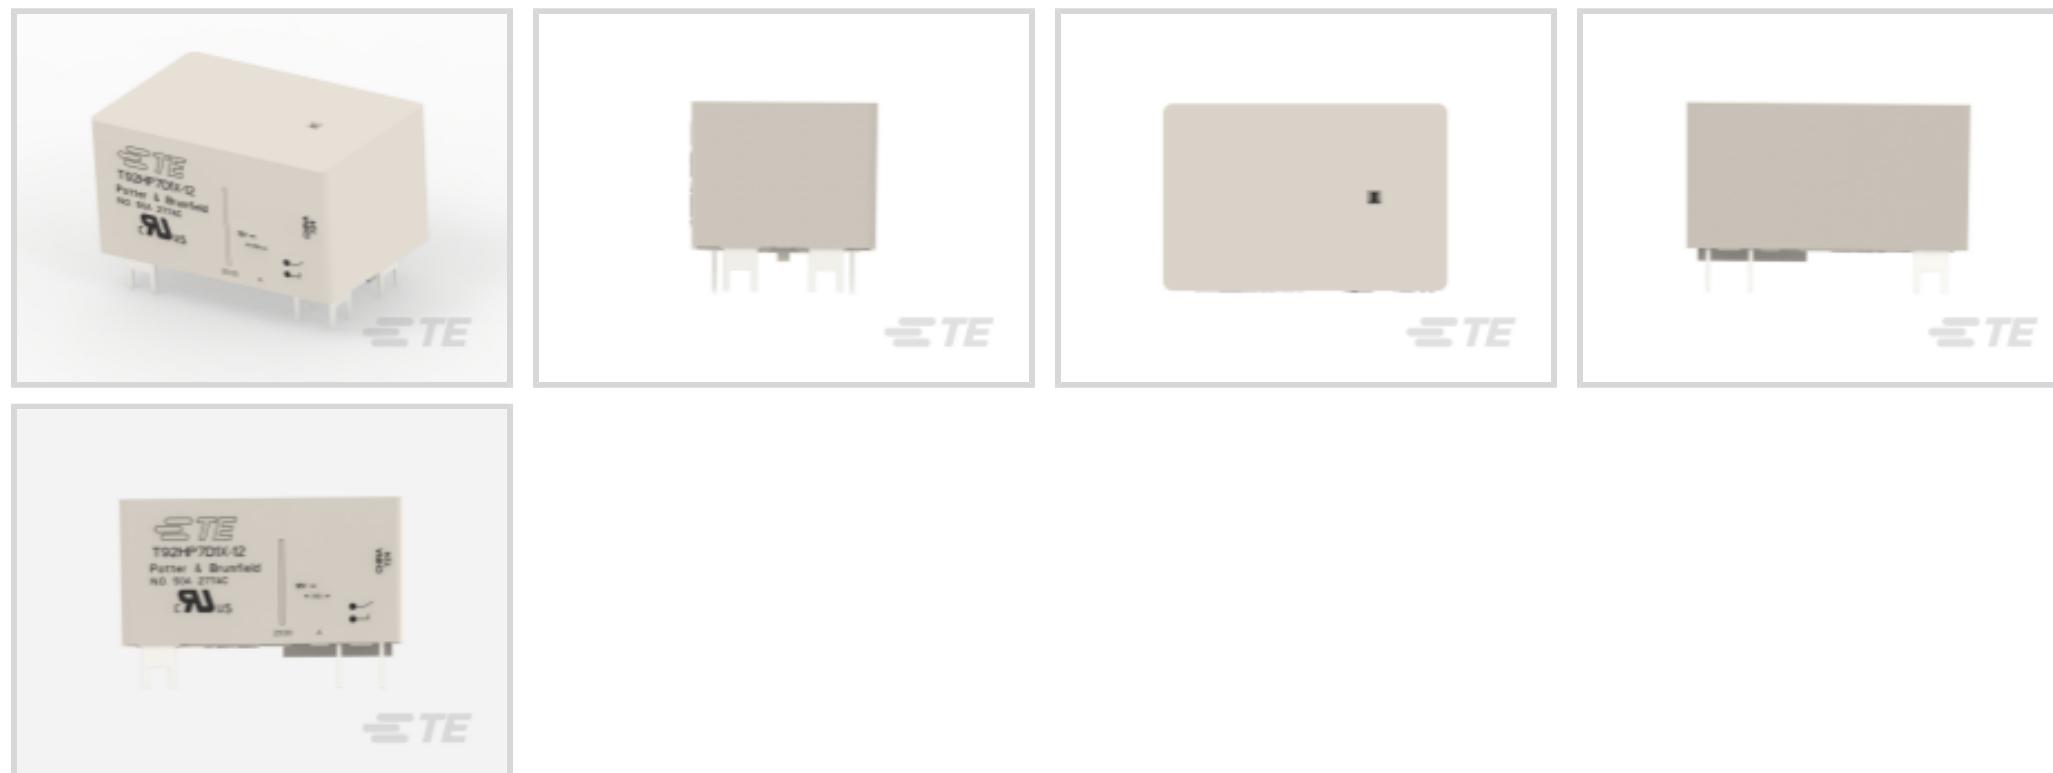

Relay Type: **General Purpose Power Relay**

Coil Magnetic System: **Monostable**

Coil Power Rating DC: **1.7 W**

Coil Resistance: **86 Ω**

Coil Special Features: **UL Coil Insulation Class F**

[All 2 Pole Relays: Power Relays, Standard, Monostable, 1700 mW \(5\)](#)

Features

Product Type Features

Relay Type	General Purpose Power Relay
------------	-----------------------------

Configuration Features

Coil Special Features	UL Coil Insulation Class F
Contact Arrangement	2 Form A DPST-NO
Contact Number of Poles	2

Electrical Characteristics

Coil Current	.14 A
Insulation Initial Dielectric Between Open Contacts	1500 Vrms
Contact Limiting Making Current	50 A
Contact Limiting Continuous Current	50 A
Insulation Initial Dielectric Between Adjacent Contacts	1500 Vrms
Insulation Initial Dielectric Between Contacts & Coil	4000 Vrms
Insulation Initial Resistance	1000 MΩ

Contact Limiting Breaking Current	50 A
Coil Power Rating DC	1.7 W
Coil Resistance	86 Ω
Coil Voltage Rating	12 VDC
Contact Current Rating	50 A
Contact Switching Load (Min)	500mA @ 12V
Contact Switching Voltage (Max)	600 VAC
Contact Voltage Rating	277 VAC

Body Features

Enclosure Type	Plastic Dust Cover
Product Weight	86 g

Contact Features

Contact Plating Material	Silver Nickel
Contact Material	Ag Alloy

Termination Features

Relay Connection Type	PCB Termination
Terminal Configuration	Solder Pins

Mechanical Attachment

Product Mount Type	Printed Circuit Board
--------------------	-----------------------

Dimensions

Insulation Clearance Between Contact & Coil	8 mm[.31 in]
Insulation Creepage Between Contact & Coil	8 mm[.31 in]
Product Width	34.54 mm[1.36 in]
Product Length	52.32 mm[2.05 in]
Product Height	30.73 mm[1.21 in]

Usage Conditions

Environmental Category of Protection	RTI
Environmental Ambient Temperature (Max)	85 °C[185 °F]
Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]

Operation/Application

Current Type	DC
Shock Resistance	100G's, 11ms

Coil Magnetic System

Monostable

Packaging Features

Packaging Method

Box & Tray, Bundle

Other

Coil Power Rating Class

0 – 1.7 W

Contact Current Class

0 – 3 A, 0 – 50 A

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU

Compliant

EU ELV Directive 2000/53/EC

Compliant

China RoHS 2 Directive MIIT Order No 32, 2016

No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JUNE 2024
(241)Candidate List Declared Against: JAN 2024
(240)

Does not contain REACH SVHC

Halogen Content

Not Low Halogen - contains Br or Cl > 900
ppm.

Solder Process Capability

Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-Z30-T92H
2 Pole Relays: Power Relays, Standard, Monostable, 1700 mW

Customers Also Bought



TE Part #1-338068-4
MICRO-MATCH FTE,14P



TE Part #1-2176070-0
3521 24R 1% 2W



TE Part #1879215-2
CPF 0402 4K12 0.1% 25PPM 1K RL



TE Part #7-1734774-3
PCI EXP 3.1L 164 POS BLK 30u"



TE Part #1676470-2
RN 0805 97K6 0.1% 10PPM 1KRL



TE Part #2176339-5
CRGCQ 0603 22R 1%



TE Part #9-2176306-5
RP 1E 0.1W 11K 0.1% 25PPM 5K RL



TE Part #1743386-1
MQS HDR 8P ASSY(V-TYPE/A)



TE Part #CONSMA007-G
SMA Plug 50 Ohm Cable Crimp



TE Part #CONSMA011-G
SMA Jack 50 Ohm Cable Crimp

Documents

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_6-1423008-6_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_6-1423008-6_A.3d_igs.zip](#)

English

Customer View Model[ENG_CVM_CVM_6-1423008-6_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.**Datasheets & Catalog Pages**[Datasheet - Ev Charging Relays Contactors](#)

English

[POTTER & BRUMFIELD POWER RELAY T92 SERIES](#)

English

[T92 Two-Pole, 30 Amp, PC Board or Panel Mount Relay](#)

English

[T92H Series Two-pole Power Relay](#)

English

Product Specifications[T92 TRAY PACKING](#)

English

[Definitions General Purpose Relays](#)

English

Agency Approvals[UL](#)

English