



Terminals & Splices > Terminal Housings, Insulation Sleeves & Blocks > Crimp Terminal Housings



Terminal Type: **Tab**  
Connector & Housing Type: **Tab Housing**  
Number of Positions: **3**  
Terminal Orientation: **Straight**  
UL Flammability Rating: **UL 94V-0**

Features

Product Type Features

Sealable	No
Connector & Housing Type	Tab Housing

Configuration Features

Number of Positions	3
---------------------	---

Body Features

Primary Product Color	Brown
-----------------------	-------

Contact Features

Terminal Type	Tab
Terminal Orientation	Straight
Contact Mating Retention	With

Mechanical Attachment

Mating Alignment	With
Connector Mounting Type	Panel Mount



Housing Features

Housing Material	Nylon
Centerline (Pitch)	11 mm[.433 in]

Usage Conditions

Operating Temperature Range	-40 – 65 °C[-40 – 149 °F]
-----------------------------	---------------------------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1743332-2  
250 TAB CONT FOR POWER CONN

Also in the Series | Positive Lock 250

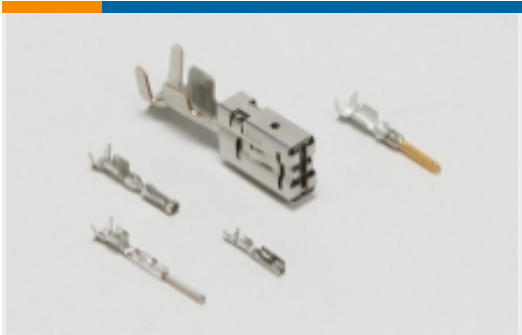

Automotive Terminals(1)




Crimp Terminal Housings(190)



Insertion & Extraction Tools(3)




Insulation Boots & Sleeves(4)

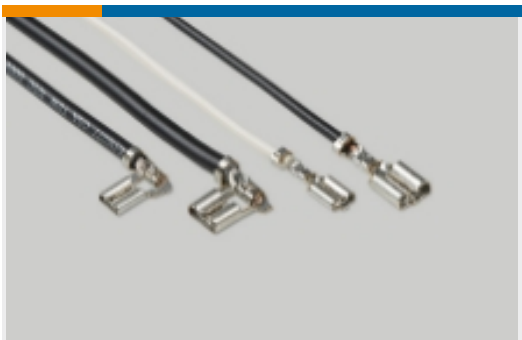

Quick Disconnects(185)

Customers Also Bought

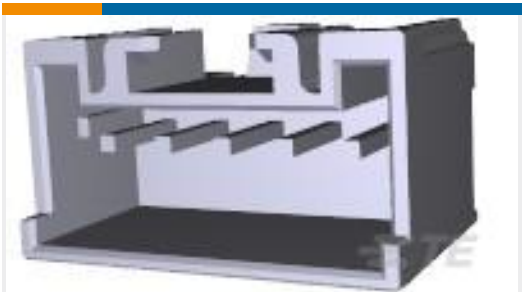


TE Part #917783-1  
2.5 S.D.L POST HDR ASY 5P STD




TE Part #917788-1  
2.5 S.D.L POST HDR ASY 10P STD



TE Part #1571563-8  
FSM4JSMLTR=TACT SWITCH,SMT, T&R

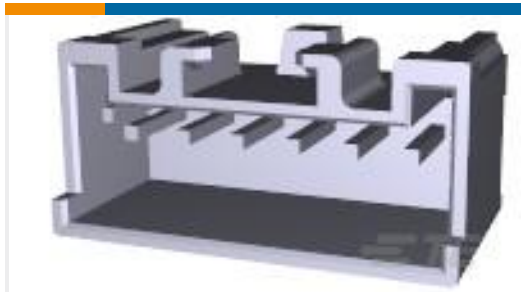

TE Part #917784-1  
2.5 S.D.L POST HDR ASY 6P STD

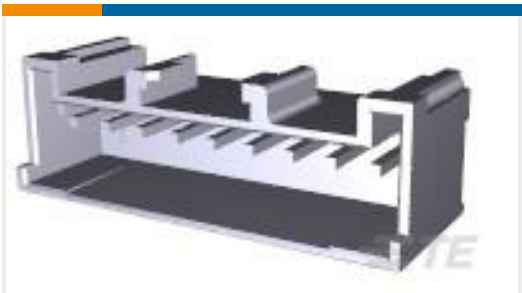

TE Part #917787-1  
2.5 S.D.L POST HDR ASY 9P STD




TE Part #917790-2  
2.5 SDL POST HDR ASSY 12P RED



TE Part #63824-5  
250 FASTON TAB TPBR



TE Part #1-179846-1  
PDL 3P HDR 6.5 SR V/T ASSY NAT

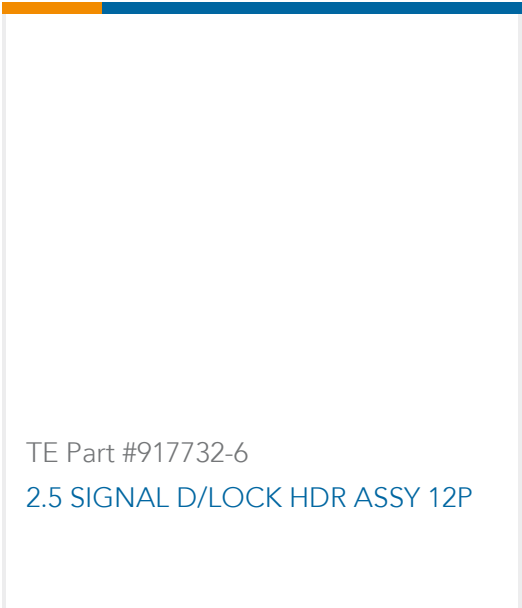

Documents

Product Drawings

250 ASSM. TAB.11mm 2P NAT

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1743330-1\_B.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1743330-1\_B.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1743330-1\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Product Specification

English

Agency Approvals

UL Report

English