

### AMPLIMITE | AMPLIMITE HDP

TE Internal #: 5205860-1

Receptacle, Board-to-Board, 37 Position, 2.74 mm [.108 in] Centerline, 2 Row, 4 Connector Shell Size, Square, AMPLIMITE

HDP, PCB D-Sub Connectors

View on TE.com >



Connectors > D-Shaped Connectors > D-Sub Connectors > PCB D-Sub Connectors > D-Sub Receptacle Assembly: Right Angle, Shell Size 4, 2.77mm



Connector & Housing Type: Receptacle

Connector System: Board-to-Board

Number of Positions: 37

Centerline (Pitch): 2.74 mm [ .108 in ]

Number of Rows: 2

All D-Sub Receptacle Assembly: Right Angle, Shell Size 4, 2.77mm (20)

### **Features**

## **Product Type Features**

· · · · · · · · · · · · · · · · · · ·	
Shell Material Configuration	Front Metal Shell
Connector & Housing Type	Receptacle
Connector System	Board-to-Board
Connector Shell Size	4
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Positions	37
Number of Rows	2
PCB Mount Orientation	Right Angle
Body Features	
Shell Plating Material	Zinc
Connector Profile	Standard
Contact Features	
Contact Options	Installed

Gold Flash

Nickel

Tin

Contact Mating Area Plating Material

PCB Contact Termination Area Plating Material

Contact Underplating Material



Contact Base Material Phosphor Bronze Contact Current Rating (Max) 6 A  Termination Features  Square Termination Post & Tail Dimension 63 mm(.025 in) Termination Post & Tail Dimension 63 mm(.025 in) Termination Post & Tail Length 3.18 mm(.125 in) Termination Method to PCB Through Hole Solder  Mechanical Attachment  Mounting Hole Diameter 3.05 mm[.12 in] PCB Mount Retention With PCB Mount Retention With PCB Mount Retention Without Connector Mounting Type Board Mount  Housing Features  Shell Material Steel Housing Material Glass-Filled PBT Centerline (Pttch) 2.74 mm[.108 in]  Dimensions  PCB Thickness (Recommended) 2.36 mm[.093 in] Row-to-Row Spacing 2.84 mm[.112 in]  Usage Conditions  Operation/Application Cincuit Application Signal Industry Standards  UL Platures  Packaging Features		
Contact Current Rating (Max)  Termination Features  Square Lermination Post & Tail Longth Termination Post & Tail Length 3.18 mm[.125 in] Lermination Method to PCB Through Hole - Solder  Mechanical Attachment  Mounting Hole Diameter PCB Mount Retention With PCB Mount Retention Type Mounting Hole Mating Ratention Without Connector Mounting Type Board Mount  Housing Features  Shall Material Stool Housing Material Centerline (Pitch) 2.74 mm[.108 in]  Dimensions  PCB I hickness (Recommended) Row-to-Row Spacing 2.84 mm[.112 in]  Usage Conditions  Operating Temperature Range -55 - 105 °Cl-67 - 221 °F   Ceretion/Application Circuit Application Circuit Application  Signal Industry Standards  UL Flammability Rating UL 94V 0  Packaging Features	Contact Base Material	Phosphor Bronze
Termination Features  Square Termination Post & Tail Dimension .63 mm[,025 in]  Termination Post & Tail Langth .3.18 mm[,125 in]  Termination Mothod to PCB .Through Hole - Solder  Mechanical Attachment  Mounting Hole Diameter .3.05 mm[,12 in]  PCB Mount Retention .With  PCB Mount Retention Type .Mounting Hole  Mating Retention .Without  Connector Mounting Type .Board Mount  Housing Features  Shell Material .Steel  Housing Material .Steel  Housing Material .Centerline (Pitch) .2.74 mm[,108 in]  Dimensions  PCB Thickness (Recommended) .2.36 mm[,093 in]  Row-to-Row Spacing .2.84 mm[,112 in]  Usage Conditions  Operating Temperature Range55 – 105 "CL-67 – 221 "F]  Operation/Application .Signal  Industry Standards  UL Plammability Rating .UL 94V 0  Packaging Features	Contact Shape & Form	Square
Square Termination Post & Tail Dimension .63 mm[.025 in]  Termination Post & Tail Length 3.18 mm[.125 in]  Termination Method to PCB Through Hole Solder  Mechanical Attachment  Mounting Hole Diameter 3.05 mm[.12 in]  PCB Mount Retention With  PCB Mount Retention Type Mounting Hole Without  Connector Mounting Type Board Mount  Housing Features  Shell Material Steel Housing Material Glass-Filled Nylon, Glass-Filled PBT 2.74 mm[.108 in]  Dimensions  PCB Thickness (Recommended) 2.36 mm[.093 in]  Row-to-Row Spacing 2.84 mm[.112 in]  Usage Conditions  Operation/Application  Circuit Application Signal  Industry Standards  UL Plammability Rating UL 94V-0  Packaging Features	Contact Current Rating (Max)	6 A
Termination Post & Tail Length Termination Method to PCB Through Hole - Solder  Mechanical Attachment  Mounting Hole Diameter Mounting Hole Diameter 3.05 mm[.12 in] PCB Mount Retention With PCB Mount Retention Type Mounting Hole Mating Retention Without Connector Mounting Type Board Mount Housing Features  Shell Material Steel Housing Material Glass Filled Nylon, Glass Filled PBT Centerline (Pitch) 2.74 mm[.108 in]  Dimensions  PCB Thickness (Recommended) Row-to-Row Spacing 2.84 mm[.112 in]  Usage Conditions  Operation/Application  Circuit Application Signal  Industry Standards  UL 9/IV-0  Packaging Features	Termination Features	
Termination Method to PCB  Mechanical Attachment  Mounting Hole Diameter 3.05 mm[.12 in]  PCB Mount Retention With  PCB Mount Retention Type Mounting Hole  Mating Retention Without  Connector Mounting Type Board Mount  Housing Features  Shell Material Steel  Housing Material Glass Filled Nylon, Glass Filled PBT  Centerline (Pitch) 2.74 mm[.108 in]  Dimensions  PCB Thickness (Recommended) 2.36 mm[.093 in]  Row-to-Row Spacing 2.84 mm[.112 in]  Usage Conditions  Operating Temperature Range -55 – 105 °C[-67 – 221 °F]  Operation/Application  Circuit Application Signal  Industry Standards  UI. 94V 0  Packaging Features	Square Termination Post & Tail Dimension	.63 mm[.025 in]
Mechanical Attachment  Mounting Hole Diameter 3.05 mm[.12 in]  PCB Mount Retention With  PCB Mount Retention Type Mounting Hole  Mating Retention Without  Connector Mounting Type Board Mount  Housing Features  Shell Material Steel  Housing Material Glass-Filled Nylon, Glass-Filled PBT  Centerline (Pitch) 2.74 mm[.108 in]  Dimensions  PCB Thickness (Recommended) 2.36 mm[.093 in]  Row-to-Row Spacing 2.84 mm[.112 in]  Usage Conditions  Operating Temperature Range 55 – 105 °C[-67 – 221 °F]  Operation/Application  Circuit Application Signal  Industry Standards  UL Flammability Rating UL 94V-0  Packaging Features	Termination Post & Tail Length	3.18 mm[.125 in]
Mounting Hole Diameter  PCB Mount Retention  With  PCB Mount Retention Type  Mounting Hole  Mating Retention  Without  Connector Mounting Type  Board Mount  Housing Features  Shell Material  Housing Material  Steel  Housing Material  Glass-Filled Nylon, Glass-Filled PBT  Centerline (Pitch)  2.74 mm[.108 in]  Dimensions  PCB Thickness (Recommended)  Row-to-Row Spacing  2.84 mm[.112 in]  Usage Conditions  Operating Temperature Range  -55 – 105 °C[ 67 – 221 °F]  Operation/Application  Circuit Application  Circuit Application  UL Planmability Rating  UL 94V 0  Packaging Features	Termination Method to PCB	Through Hole - Solder
PCB Mount Retention Type Mounting Hole  Mating Retention Without  Connector Mounting Type Board Mount  Housing Features  Shell Material Steel  Housing Material Glass-Filled Nylon, Glass-Filled PBT  Centerline (Pitch) 2.74 mm[.108 in]  Dimensions  PCB Thickness (Recommended) 2.36 mm[.093 in]  Row to Row Spacing 2.84 mm[.112 in]  Usage Conditions  Operating Temperature Range -55 – 105 °C[-67 – 221 °F]  Operation/Application  Circuit Application  Circuit Application  Industry Standards  UL Flammability Rating UL 94V-0  Packaging Features	Mechanical Attachment	
PCB Mount Retention Type Mating Retention Without  Connector Mounting Type Board Mount  Housing Features  Shell Material Steel Housing Material Glass-Filled Nylon, Glass-Filled PBT  Centerline (Pitch) 2.74 mm[.108 in]  Dimensions  PCB Thickness (Recommended) Row-to-Row Spacing 2.84 mm[.112 in]  Usage Conditions  Operating Temperature Range -55 – 105 °C[-67 – 221 °F]  Operation/Application Circuit Application  Circuit Application  Industry Standards  UL Plammability Rating UL 94V-0  Packaging Features	Mounting Hole Diameter	3.05 mm[.12 in]
Mating Retention Without  Connector Mounting Type Board Mount  Housing Features  Shell Material Steel  Housing Material Glass-Filled Nylon, Glass-Filled PBT  Centerline (Pitch) 2.74 mm[.108 in]  Dimensions  PCB Thickness (Recommended) 2.36 mm[.093 in]  Row-to-Row Spacing 2.84 mm[.112 in]  Usage Conditions  Operating Temperature Range -55 - 105 °C[-67 - 221 °F]  Operation/Application  Circuit Application Signal  Industry Standards  UL Flammability Rating UL 94V-0  Packaging Features	PCB Mount Retention	With
Connector Mounting Type  Housing Features  Shell Material  Steel  Housing Material  Glass-Filled Nylon, Glass-Filled PBT  Centerline (Pitch)  2.74 mm[.108 in]  Dimensions  PCB Thickness (Recommended)  Row-to-Row Spacing  2.84 mm[.112 in]  Usage Conditions  Operating Temperature Range  -55 - 105 °C[-67 - 221 °F]  Operation/Application  Circuit Application  Industry Standards  UL Flammability Rating  Packaging Features	PCB Mount Retention Type	Mounting Hole
Housing Features  Shell Material Steel  Housing Material Glass-Filled Nylon, Glass-Filled PBT  Centerline (Pitch) 2.74 mm[.108 in]  Dimensions  PCB Thickness (Recommended) 2.36 mm[.093 in]  Row-to-Row Spacing 2.84 mm[.112 in]  Usage Conditions  Operating Temperature Range -55 – 105 °C[-67 – 221 °F]  Operation/Application  Circuit Application  Signal  Industry Standards  UL Flammability Rating UL 94V-0  Packaging Features	Mating Retention	Without
Shell Material  Housing Material  Centerline (Pitch)  Dimensions  PCB Thickness (Recommended)  Row-to-Row Spacing  Operating Temperature Range  Operation/Application  Circuit Application  Circuit Application  Industry Standards  UL Flammability Rating  Value (Pitch)  Class-Filled Nylon, Glass-Filled PBT  2.74 mm[.108 in]  2.74 mm[.108 in]  2.84 mm[.1093 in]  2.84 mm[.112 in]  Signal  UL 94V-0  Packaging Features	Connector Mounting Type	Board Mount
Housing Material  Centerline (Pitch)  2.74 mm[.108 in]  Dimensions  PCB Thickness (Recommended)  Row-to-Row Spacing  2.84 mm[.112 in]  Usage Conditions  Operating Temperature Range  -55 – 105 °C[-67 – 221 °F]  Operation/Application  Circuit Application  Signal  Industry Standards  UL Flammability Rating  UL 94V-0  Packaging Features	Housing Features	
Centerline (Pitch)  2.74 mm[.108 in]  Dimensions  PCB Thickness (Recommended)  Row-to-Row Spacing  2.84 mm[.112 in]  Usage Conditions  Operating Temperature Range  -55 - 105 °C[-67 - 221 °F]  Operation/Application  Circuit Application  Signal  Industry Standards  UL Flammability Rating  UL 94V-0  Packaging Features	Shell Material	Steel
Dimensions  PCB Thickness (Recommended)  Row-to-Row Spacing  2.84 mm[.093 in]  Usage Conditions  Operating Temperature Range  -55 - 105 °C[-67 - 221 °F]  Operation/Application  Circuit Application  Signal  Industry Standards  UL Flammability Rating  UL 94V-0  Packaging Features	Housing Material	Glass-Filled Nylon, Glass-Filled PBT
PCB Thickness (Recommended)  Row-to-Row Spacing  2.84 mm[.093 in]  Usage Conditions  Operating Temperature Range  -55 - 105 °C[-67 - 221 °F]  Operation/Application  Circuit Application  Signal  Industry Standards  UL Flammability Rating  UL 94V-0  Packaging Features	Centerline (Pitch)	2.74 mm[.108 in]
Row-to-Row Spacing  Usage Conditions  Operating Temperature Range  -55 – 105 °C[-67 – 221 °F]  Operation/Application  Circuit Application  Signal  Industry Standards  UL Flammability Rating  UL 94V-0  Packaging Features	Dimensions	
Usage Conditions  Operating Temperature Range -55 – 105 °C[-67 – 221 °F]  Operation/Application  Circuit Application Signal  Industry Standards  UL Flammability Rating UL 94V-0  Packaging Features	PCB Thickness (Recommended)	2.36 mm[.093 in]
Operating Temperature Range -55 – 105 °C[-67 – 221 °F]  Operation/Application  Circuit Application  Industry Standards  UL Flammability Rating  UL 94V-0  Packaging Features	Row-to-Row Spacing	2.84 mm[.112 in]
Operation/Application  Circuit Application  Signal  Industry Standards  UL Flammability Rating  UL 94V-0  Packaging Features	Usage Conditions	
Circuit Application Signal  Industry Standards  UL Flammability Rating UL 94V-0  Packaging Features	Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Industry Standards  UL Flammability Rating  UL 94V-0  Packaging Features	Operation/Application	
UL Flammability Rating  UL 94V-0  Packaging Features	Circuit Application	Signal
Packaging Features	Industry Standards	
	UL Flammability Rating	UL 94V-0
	Packaging Features	
Packaging Quantity 56	Packaging Quantity	56
Packaging Method Package	Packaging Method	Package

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# Compatible Parts






Also in the Series | AMPLIMITE HDP





# Customers Also Bought

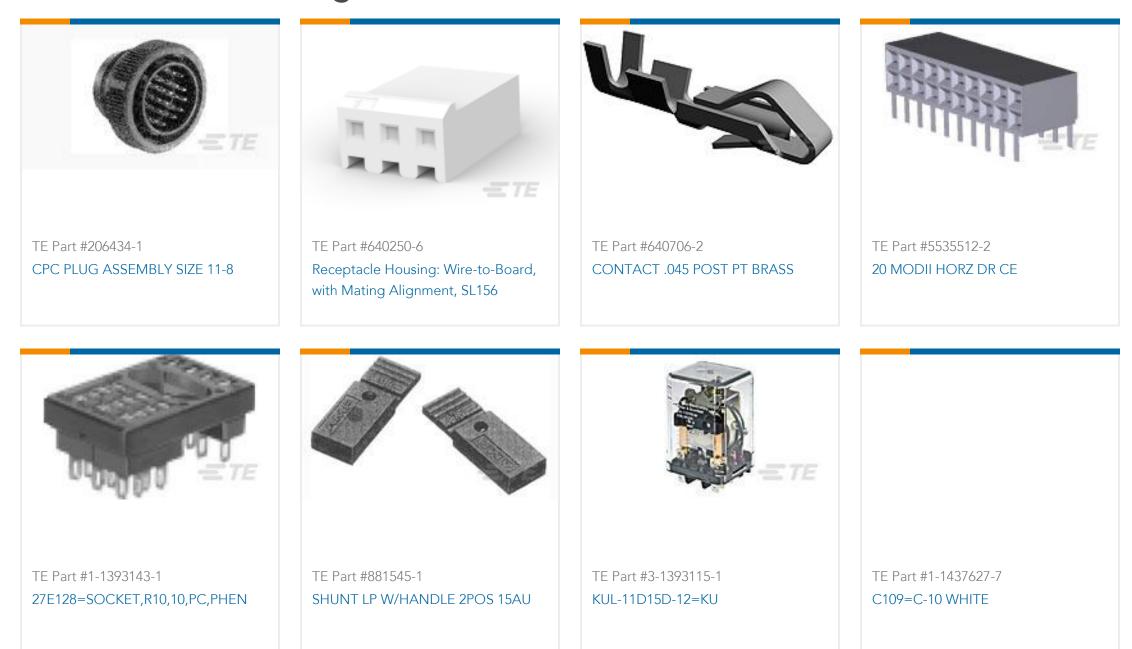

## **Documents**

## Product Drawings

37 RCPT RA/MS STD

English

## **CAD Files**

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_5205860-1\_O.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_5205860-1\_O.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_5205860-1\_O.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Receptacle, Board-to-Board, 37 Position, 2.74 mm [.108 in] Centerline, 2 Row, 4 Connector Shell Size, Square, AMPLIMITE HDP, PCB D-Sub Connectors



**Product Specifications** 

**Application Specification** 

English

Agency Approvals

**UL Report** 

English