

LOW EMI PWM INTELLIGENT POWER HIGH SIDE SWITCH

Features

- Integrated bootstrap for 100kHz switching
- Optimized EMI switching
- Charge pump for DC operation
- Over temperature shutdown
- Over current shutdown
- 3.3V logic level
- Ground loss protection
- ESD protection

Applications

- 24V loads
- Injectors
- Valves
- DC motors

Description

The Device is a five terminal Intelligent Power Switch (IPS) for use in a high side configuration. It features short circuit, over-temperature, ESD protection, inductive load capability and diagnostic feedback. An integrated bootstrap diode allows fast switching.

Product Summary

| | |
|------------|-----------|
| Rds(on) | 35mΩ max. |
| Vbr | 75V min. |
| I shutdown | 20A min. |

Package




D-Pak – 5 Leads

Ordering Information

| Base Part Number | Package Type | Standard Pack | | Complete Part Number |
|------------------|---------------|--------------------|----------|----------------------|
| | | Form | Quantity | |
| AUIPS72211R | D-Pak-5-Leads | Tube | 75 | AUIPS72211R |
| | | Tape and reel left | 3000 | AUIPS72211RTRL |

Typical Connection

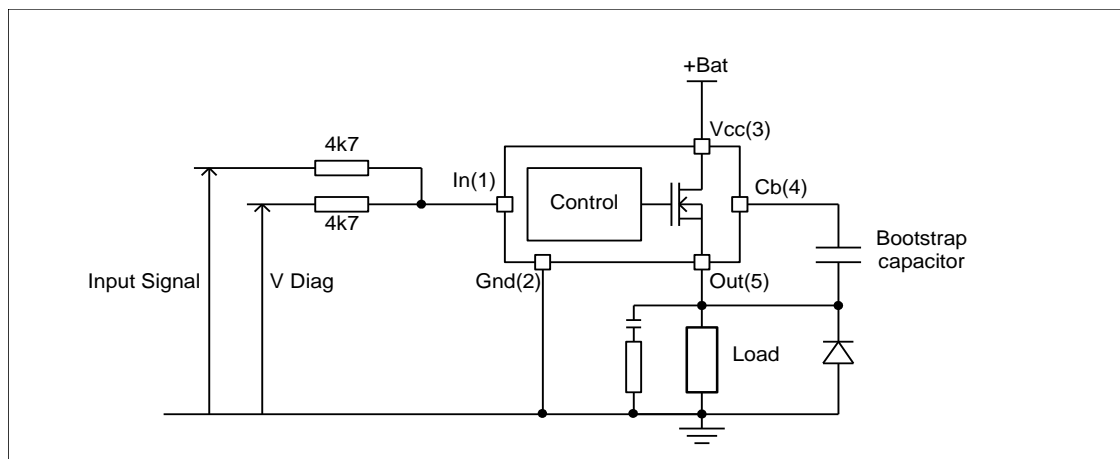

Absolute Maximum Ratings

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. (T_J= -40°C..150°C, V_{CC}=6..60V unless otherwise specified).

| Symbol | Parameter | Min. | Max. | Units |
|----------------------|---|-------|----------------------|-------|
| V _{out} | Maximum output voltage | Gnd-3 | V _{CC} +0.3 | V |
| V _{in} | Maximum input voltage | -0.3 | 5.5 | |
| V _{CC} max. | Maximum V _{CC} voltage | — | 65 | |
| I _{in} max. | Maximum input current | -3 | 10 | mA |
| P _d | Maximum power dissipation (internally limited by thermal protection) R _{th} =50°C/W 1"sq. footprint | — | 2.5 | W |
| T _J max. | Max. storage & operating temperature junction temperature | -40 | 150 | °C |

Thermal Characteristics

| Symbol | Parameter | Typ. | Max. | Units |
|------------------|--|------|------|-------|
| R _{th1} | Thermal resistance junction to ambient | 50 | — | °C/W |
| R _{th2} | Thermal resistance junction to case | 1.2 | — | |

Recommended Operating Conditions

These values are given for a quick design. For operation outside these conditions, please consult the application notes.

| Symbol | Parameter | Min. | Max. | Units |
|-------------------|--|------|-------|-------|
| V _{IH} | High level input voltage | 2.7 | 5.5 | V |
| V _{IL} | Low level input voltage | 0 | 0.9 | |
| R _{in} | Recommended resistor in series with I _N pin | 2(1) | 10(2) | kΩ |
| R _{dg} | Recommended resistor in series with dg pin | 2(1) | 10(2) | |
| F max. | Max. switching frequency | — | 100 | kHz |
| C _{boot} | Bootstrap capacitor | 30 | 50 | nF |

(1) Limited by the maximum input current

(2) Limited by the input capacitor

Static Electrical Characteristics

$T_j = -40..150^{\circ}\text{C}$, $V_{cc} = 6..60\text{V}$ (unless otherwise specified)

| Symbol | Parameter | Min. | Typ. | Max. | Units | Test Conditions |
|----------|---|------|------|------|------------------|---|
| Rds(on) | ON state resistance $T_j = 25^{\circ}\text{C}$ | — | 30 | 35 | $\text{m}\Omega$ | $V_{in} = 5\text{V}$, $I_{out} = 5\text{A}$ |
| | ON state resistance $T_j = 150^{\circ}\text{C}$ | — | 50 | 70 | | $V_{in} = 5\text{V}$, $I_{out} = 5\text{A}$ |
| Vcc op. | Operating voltage range with short circuit protection | 6 | — | 60 | V | |
| Icc Off | Supply current when Sleep mode | — | 0.2 | 5 | μA | During sleep mode $V_{in} = 0\text{V}$, $V_{out} = 0\text{V}$ $T_j = 25^{\circ}\text{C}$, $V_{cc} = 28\text{V}$ |
| Iout Off | Output leakage current | — | 0.2 | 5 | | |
| Icc On | Supply current when On | — | 4 | 10 | mA | $V_{in} = 5\text{V}$ $T_j = 25^{\circ}\text{C}$, $V_{cc} = 28\text{V}$ |
| Iout On | Output current when Off | — | 10 | — | mA | $V_{in} = 0\text{V}$ $T_j = 25^{\circ}\text{C}$, $V_{cc} = 28\text{V}$ |
| Vih | Input high threshold voltage | — | 1.9 | 2.2 | V | |
| Vil | Input low threshold voltage | 1 | 1.6 | — | | |
| In hyst. | Input hysteresis | 0.1 | 0.3 | 0.5 | | |
| I in, on | Input current when the part is on | — | 15 | 30 | μA | $V_{in} = 5\text{V}$ |
| Vin, off | Input voltage when the part is in fault mode | — | 0.1 | 0.4 | V | $I_{in} = 5\text{mA}$ |

Switching Electrical Characteristics

$V_{cc} = 28\text{V}$, Resistive load $= 2\Omega$, $V_{in} = 5\text{V}$, $T_j = 25^{\circ}\text{C}$

| Symbol | Parameter | Min. | Typ. | Max. | Units | Test Conditions |
|--------|---------------------------------------|------|------|------|---------------|-----------------|
| Tdon | Turn-on delay time to 20% | — | 1 | — | μs | |
| Tr | Rise time from 20% to 80% of V_{cc} | — | 0.8 | — | | |
| Tdoff | Turn-off delay time to 80% | — | 2.2 | — | | |
| Tf | Fall time from 80% to 20% of V_{cc} | — | 0.4 | — | | |


Protection Characteristics

$T_j = -40..150^{\circ}\text{C}$, $V_{cc} = 6..60\text{V}$ (unless otherwise specified)

| Symbol | Parameter | Min. | Typ. | Max. | Units | Test Conditions |
|------------------------|---|--------|------|------|--------------------|--|
| I _{sd} on | Over current shutdown | 20 | 30 | 40 | A | $V_{out} = 0\text{V}$ |
| T _{sd} | Over temperature threshold | 150(3) | 165 | — | $^{\circ}\text{C}$ | |
| UV H | Under voltage during turn on | — | 5 | 6.2 | V | |
| UV L | Under voltage during turn off | — | 4 | 5 | | |
| T _{diag} | Diagnostic time | — | 10 | — | ms | see figure 1 |
| T _{sleep} | Time to enter in sleep mode | 7 | 15 | 30 | | see figure 2 |
| T _{reset} | Time to enter in sleep mode and reset the fault | — | 5 | — | | see figure 1 |
| T _{wkp} | Time to leave the sleep mode | — | 0.05 | 0.5 | μs | $R_{in} = 4\text{k}\Omega$ see figure 2 & 3 |
| T _{pw on rst} | Power on reset duration | 4 | 8 | 12 | | |


(3) Guaranteed by design

Lead Assignments



Functional Block Diagram

All values are typical

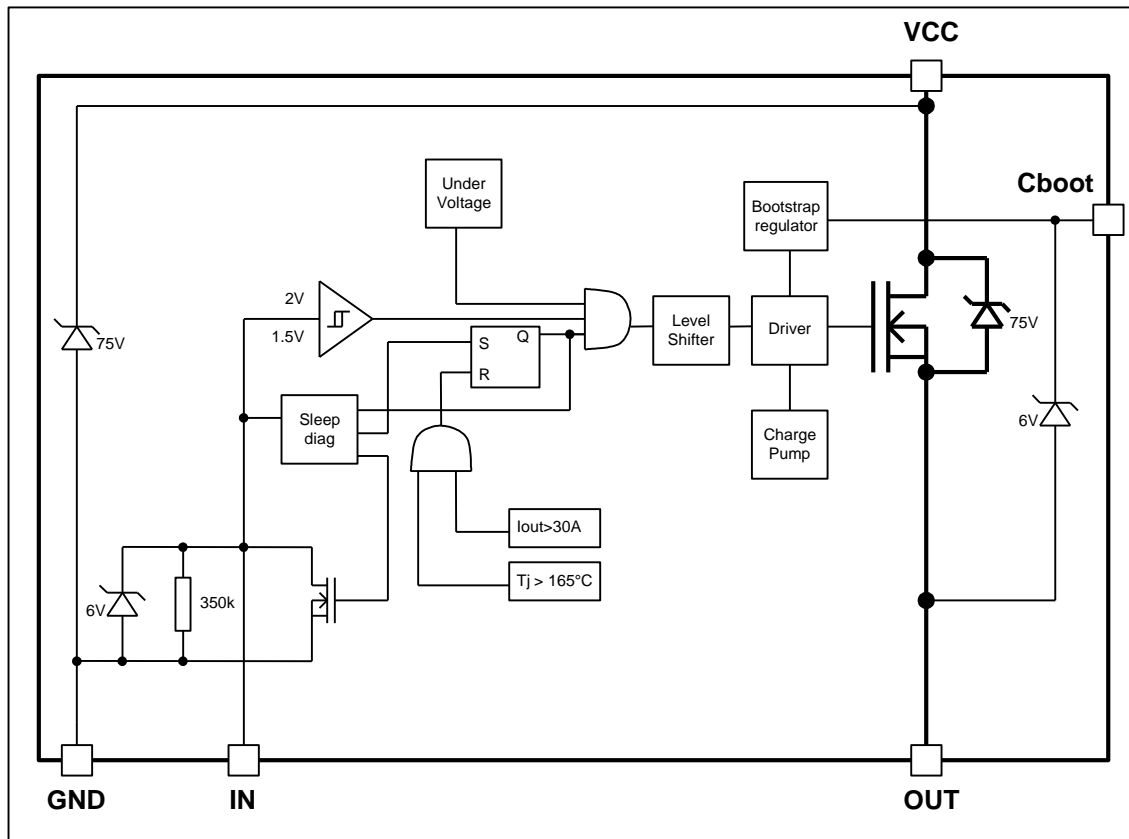

Sleep_mode / Diagnostic

Sleep_mode block manages the diagnostic and the sleep_mode. The device enters in sleep mode if input is inactive during a delay higher than T_{sleep} .

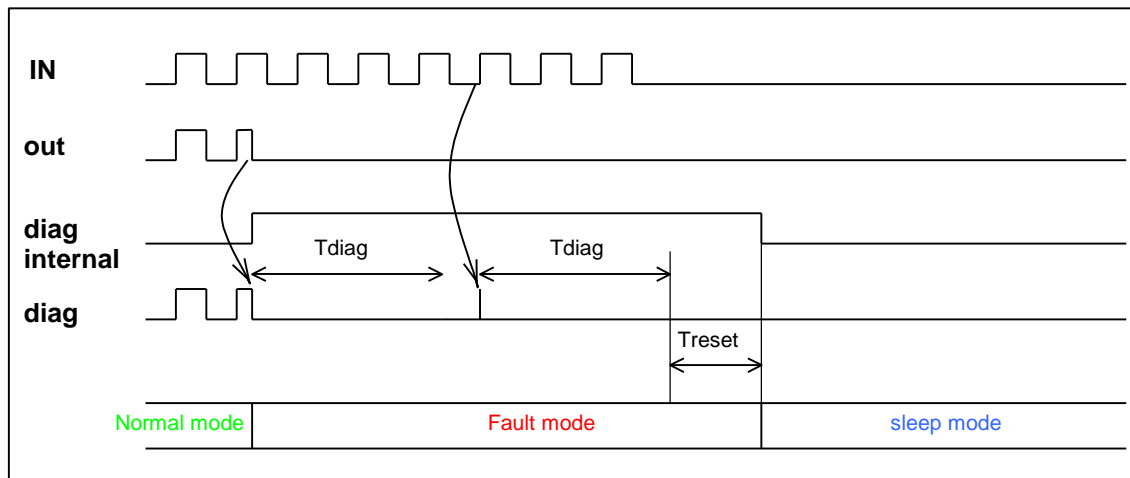


Figure 1

Bootstrap

The AUIPS7221 integrates a bootstrap regulator to maintain a fixed voltage on the bootstrap capacitor for any battery voltage. The regulator is off during the sleep mode to reduce the current consumption.

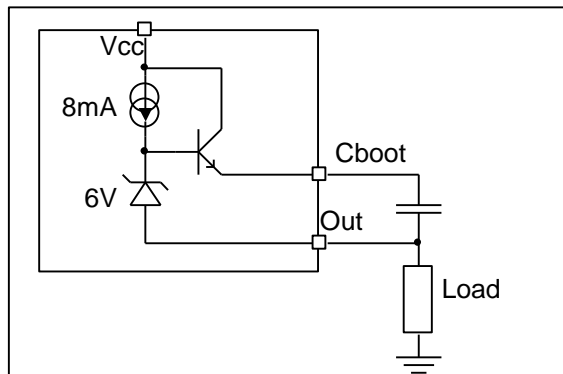


Figure 2

The 8mA current source flows permanently on the output when the output is off and the part is not in sleep mode. In case of an open load condition, the output voltage will be at $V_{cc}-6V$.

Wake up sequence

To wake up the part from the sleep mode, the input must be activated at least during T_{wkp} , then the bootstrap regulator is switched on and the bootstrap capacitor is charged. The output will be not activated during $T_{pw\ on\ rst}$.

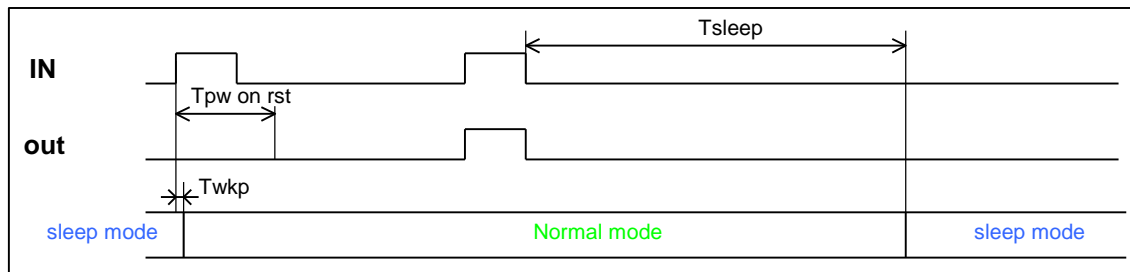


Figure 3

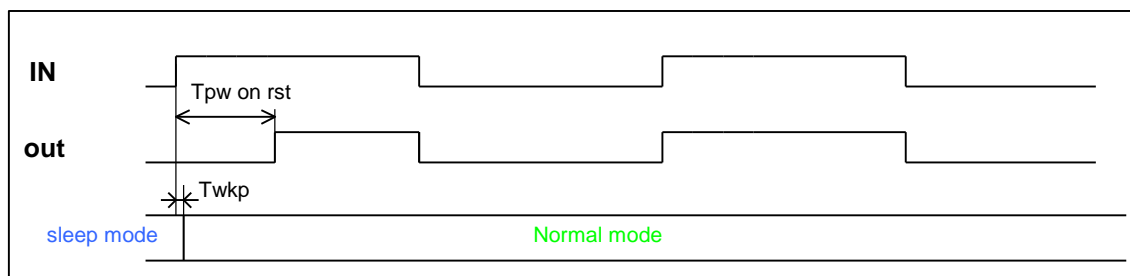


Figure 4

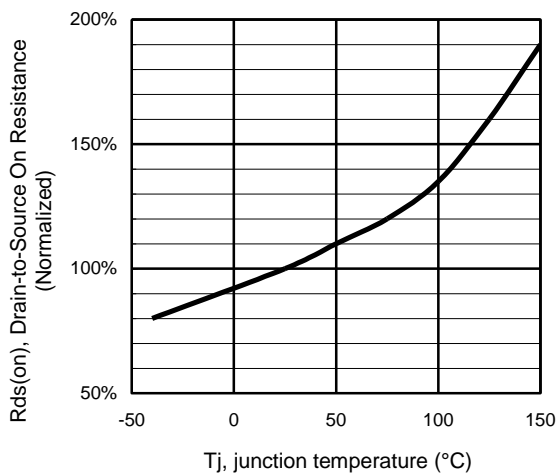


Figure 5 - Normalized R_{ds(on)} (%) Vs T_j (°C)

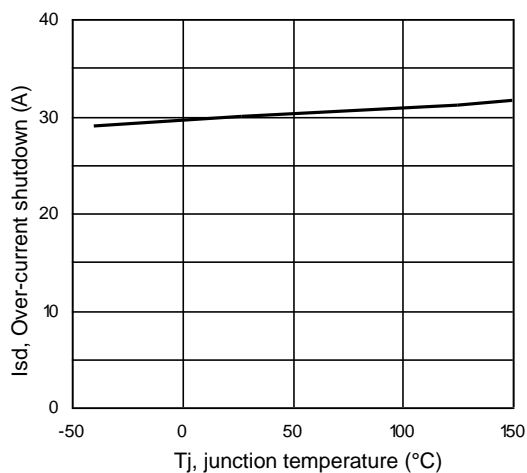


Figure 6 – I_{sd} (A) Vs T_j (°C)

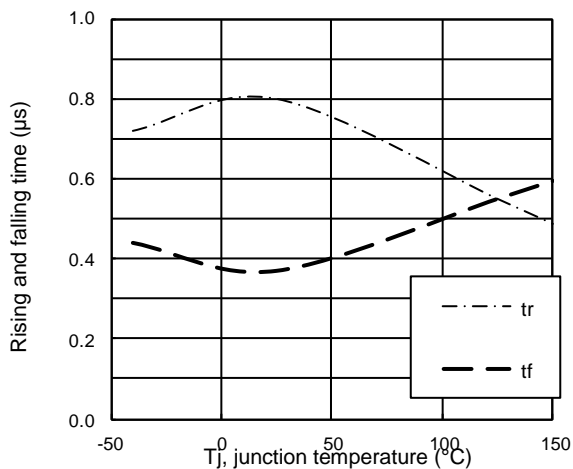


Figure 7 – t_r / t_f (μs) Vs T_j (°C)

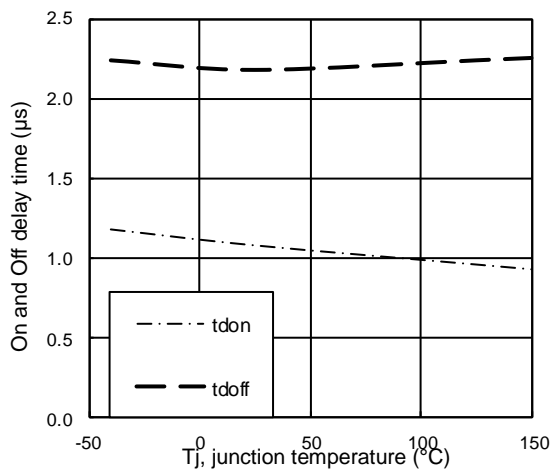
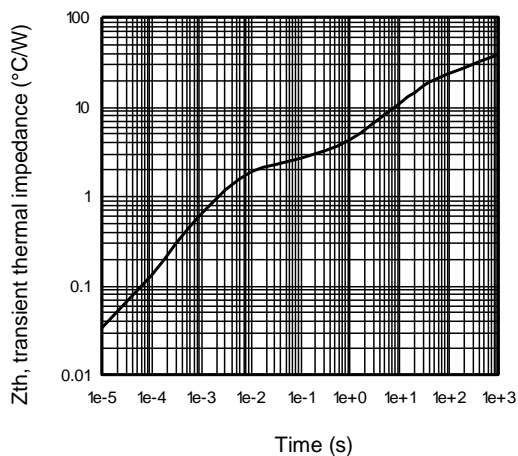


Figure 8 – t_{don} / t_{doff} (μs) Vs T_j (°C)



**Figure 9 – Transient thermal impedance (°C/W)
Vs time (s)**

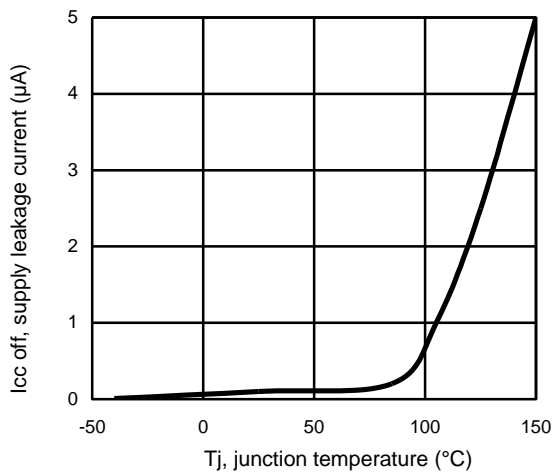


Figure 10 – Icc off (µA) Vs Tj (°C)


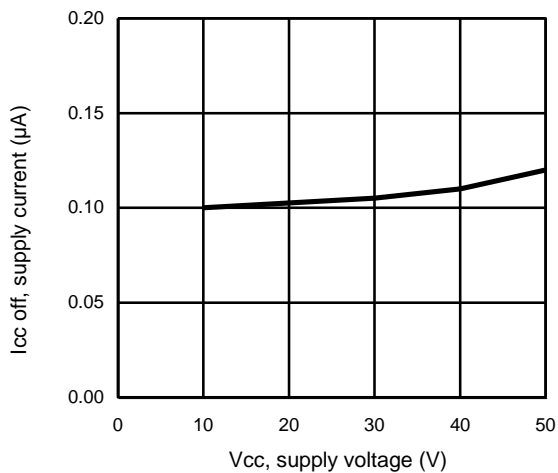


Figure 11 – Icc off (A) Vs Vcc (V)


Case Outline 5 Lead – DPAK

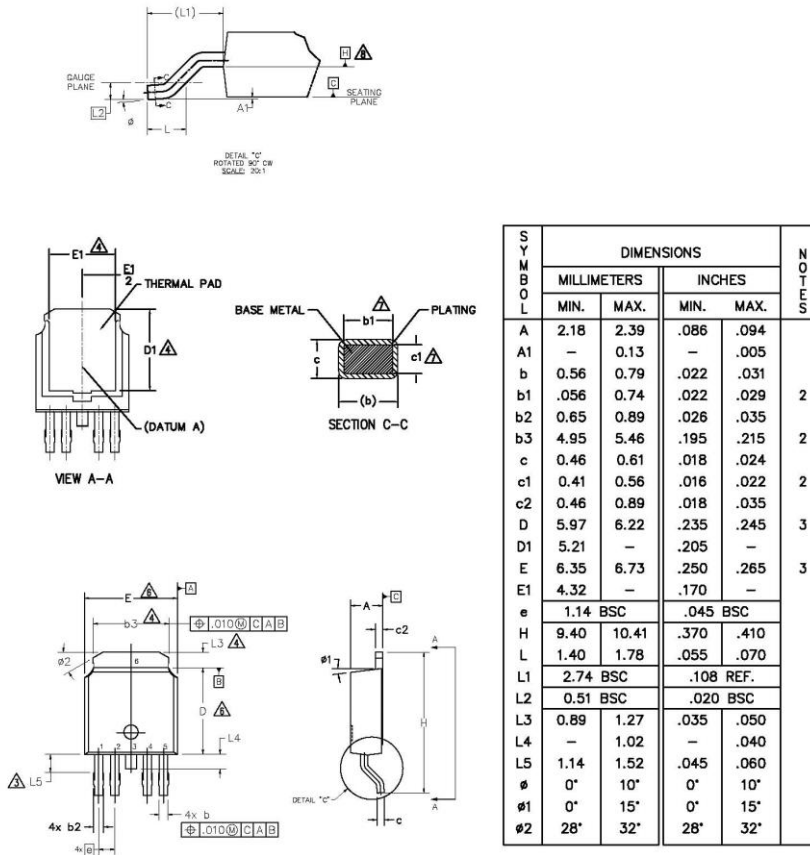

NOTES:

- 1.— DIMENSIONING AND TOLERANCING AS PER ASME Y14.5M-1994
- 2.— DIMENSION ARE SHOWN IN INCHES [MILLIMETERS].
- 3.— LEAD DIMENSION UNCONTROLLED IN L5.
- 4.— DIMENSION D1, E1, L3 & b3 ESTABLISH A MINIMUM MOUNTING SURFACE FOR THERMAL PAD.
- 5.— SECTION C-C DIMENSIONS APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN .005 AND 0.10 [0.13 AND 0.25] FROM THE LEAD TIP.
- 6.— DIMENSION D & E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED .005 [0.13] PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTMOST EXTREMES OF THE PLASTIC BODY.
- 7.— DIMENSION b1 & c1 APPLIED TO BASE METAL ONLY.
- 8.— DATUM A & B TO BE DETERMINED AT DATUM PLANE H.
- 9.— OUTLINE CONFORMS TO JEDEC OUTLINE TO-252.
10. LEADS AND DRAIN ARE PLATED WITH 100% Sn

Tape & Reel 5 Lead – DPAK

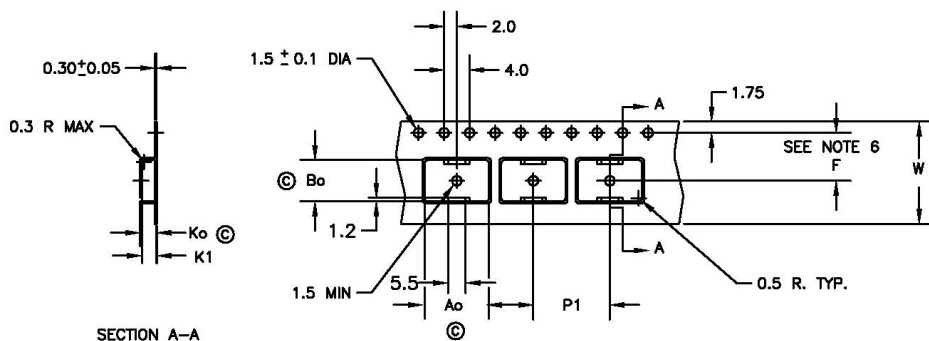


$A_o = 10.5 \text{ mm}$
 $B_o = 7.0 \text{ mm}$
 $K_o = 2.8 \text{ mm}$
 $K_1 = 2.4 \text{ mm}$
 $F = 7.5 \text{ mm}$
 $P_1 = 12.0 \text{ mm}$
 $W = 16.0 \pm .3 \text{ mm}$

NOTES:

1. 10 SPROCKET HOLE PUNCH CUMULATIVE TOLERANCE ± 0.02
2. CAMBER NOT TO EXCEED 1mm IN 100mm
3. MATERIAL: CONDUCTIVE BLACK POLYSTYRENE
4. A_o AND B_o MEASURED ON A PLANE 0.3mm ABOVE THE BOTTOM OF THE POCKET
5. K_o MEASURED FROM A PLANE ON THE INSIDE BOTTOM OF THE POCKET TO THE TOP SURFACE OF THE CARRIER
6. POCKET POSITION RELATIVE TO THE SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
7. VENDOR: (OPTIONAL)
8. MUST ALSO MEET REQUIREMENTS OF EIA STANDARD #EIA-481A, TAPING OF SURFACE-MOUNT COMPONENTS FOR AUTOMATIC PLACEMENT.
9. TOLERANCE TO BE MANUFACTURER STANDARD
10. SURFACE RESISTIVITY OF MOLDED MATL: MUST MEASURE LESS THAN OR EQUAL TO 10^8 OHMS PER SQUARE. MEASURED IN ACCORDANCE TO PROCEDURE GIVEN IN ASTM D-257 & ASTM D-991 (REF. C-9000 SPEC.)
11. TOTAL LENGTH PER REEL MUST BE 79 METERS
12. © CRITICAL DIMENSION

Part Marking Information

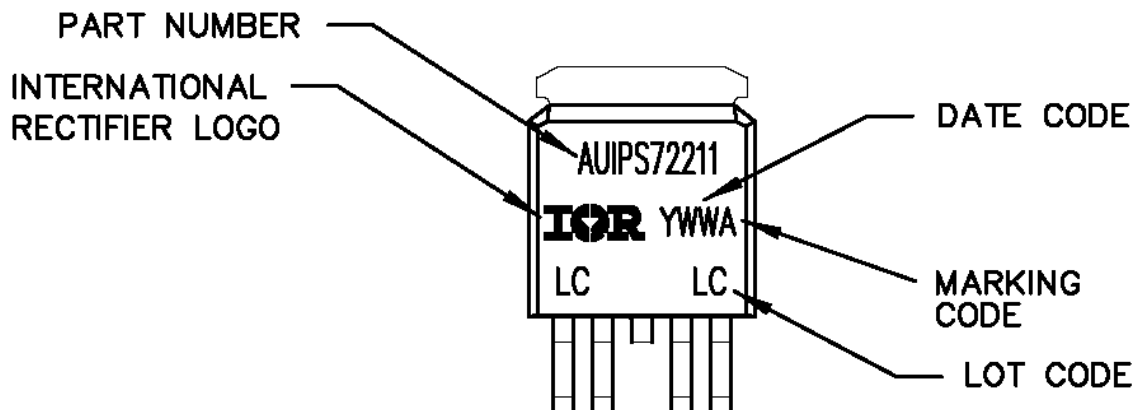

Qualification Information

| | | | |
|-----------------------------------|----------------------|---|--|
| Qualification Level | | Automotive (per AEC-Q100) | |
| | | Comments: This family of ICs has passed an Automotive qualification. IR's Industrial and Consumer qualification level is granted by extension of the higher Automotive level. | |
| Moisture Sensitivity Level | | DPAK-5L | MSL1, 260°C (per IPC/JEDEC J-STD-020) |
| ESD | Machine Model | Class M2 (150V) (per AEC-Q100-003) | |
| | Human Body Model | Class H1A (500V) (per AEC-Q100-002) | |
| | Charged Device Model | Class C4 (1000V) (per AEC-Q100-011) | |
| IC Latch-Up Test | | Class II, Level A (per AEC-Q100-004) | |
| RoHS Compliant | | Yes | |

Published by
Infineon Technologies AG
81726 München, Germany
© Infineon Technologies AG 2016
All Rights Reserved.

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office (www.infineon.com).

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

Revision History

| Revision | Date | Notes/Changes |
|----------|------------------|------------------------------------|
| A | August 4th, 2011 | Initial release |
| Rev 1.1 | March 6th, 2017 | 'Part Marking information' updated |