

CA-16S1N8AHZ00 - Device connector rear mounting



1619784

<https://www.phoenixcontact.com/us/products/1619784>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Device connector rear mounting, series: CA, straight, shielded: yes, for standard and SPEEDCON interlock, No. of pos.: 16, Direction of rotation: Standard, contact connection type: Socket, Crimp connection, Axial seal, Central fixing, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1243836

Your advantages

- Safe use in the field, thanks to high degree of protection
- Connector for flexible on-site assembly
- Consistent EMC protection for reliable transmission of signals
- Crimping connection: vibration- and temperature-resistant assembly
- Application-specific wall mounting optionally with thread or anti-rotation protection and lock nut

Commercial data

Item number	1619784
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB31
Product key	ABRAER
GTIN	4046356821339
Weight per piece (including packing)	48.6 g
Weight per piece (excluding packing)	44.6 g
Customs tariff number	85366990
Country of origin	DE

CA-16S1N8AHZ00 - Device connector rear mounting

1619784

<https://www.phoenixcontact.com/us/products/1619784>



Technical data

Notes

Order information:	Order 6 x Ø 1 mm crimp contacts separately
--------------------	--

Mounting

Thread type	()
-------------	----

Product properties

Product type	Circular connectors (device side)
--------------	-----------------------------------

Data management status

Article revision	05
------------------	----

Connector

Insulating body

Note	Order information: Order 6 x Ø 1 mm crimp contacts separately
Coding	N
Insulation body material	PA 6.6
Connection method	Crimp connection
Contact switching type	Socket
Application	Signal
Number of positions	16
Direction of rotation	Standard
Connection profile	16
Contact diameter Signal contacts	1 mm
Litz wire cross-section Signal contacts min.	0.08 mm ²
Litz wire cross-section Signal contacts max.	1 mm ²
Nominal current per signal contact	8 A
Rated voltage Signal contact	48 V AC
Rated surge voltage	1.5 kV
Oversupply category	III
Degree of pollution	3

Housing

Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Type of locking	for standard and SPEEDCON interlock
Pg screw connection	none
Degree of protection (plugged in)	IP67
Thread type	M23

Environmental and real-life conditions

CA-16S1N8AHZ00 - Device connector rear mounting

1619784

<https://www.phoenixcontact.com/us/products/1619784>



Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
Ambient temperature (storage/transport)	15 °C ... 25 °C
Permissible humidity (storage/transport)	50 % ... 65 %

CA-16S1N8AHZ00 - Device connector rear mounting



1619784

<https://www.phoenixcontact.com/us/products/1619784>



Drawings

Dimensional drawing

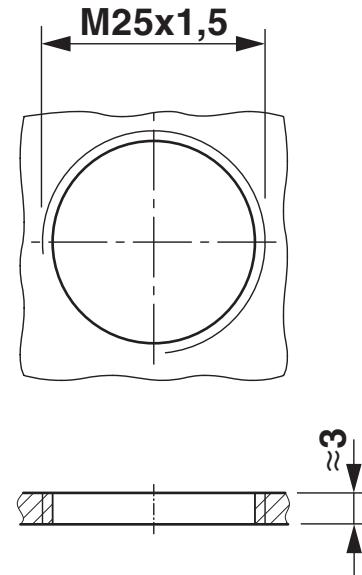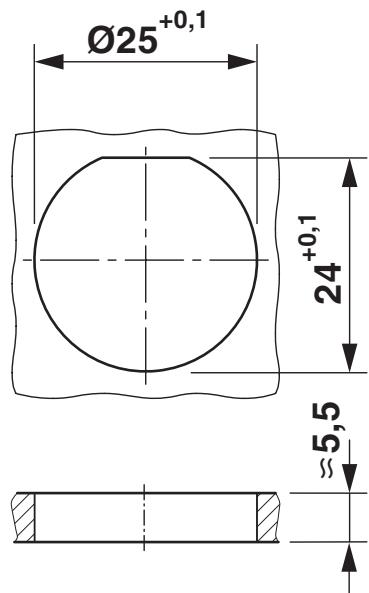

Installation dimensions

Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1619784>

cUL Recognized Approval ID: E335019-20141210				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	48 V	3 A	20 - 20	-

UL Recognized Approval ID: E335019-20141210				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	48 V	5 A	20 - 20	-

cULus Recognized

CA-16S1N8AHZ00 - Device connector rear mounting

1619784

<https://www.phoenixcontact.com/us/products/1619784>



Classifications

ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

ETIM

ETIM 9.0	EC002635
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

CA-16S1N8AHZ00 - Device connector rear mounting

1619784

<https://www.phoenixcontact.com/us/products/1619784>



Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.	

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	fa6c8b38-b8d5-449a-b89b-0ff61274e0ad

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA

586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com