

PART NUMBER

54LS353DMB-ROCV

Rochester Electronics

Manufactured Components

Rochester branded components are manufactured using either die/wafers purchased from the original suppliers or Rochester wafers recreated from the original IP. All re-creations are done with the approval of the Original Component Manufacturer. (OCM)

Parts are tested using original factory test programs or Rochester developed test solutions to guarantee product meets or exceeds the OCM data sheet.

Quality Overview

- ISO-9001
- AS9120 certification
- Qualified Manufacturers List (QML) MIL-PRF-38535
 - Class Q Military
 - Class V Space Level

Qualified Suppliers List of Distributors (QSLD)

- Rochester is a critical supplier to DLA and meets all industry and DLA standards.

Rochester Electronics, LLC is committed to supplying products that satisfy customer expectations for quality and are equal to those originally supplied by industry manufacturers.

The original manufacturer's datasheet accompanying this document reflects the performance and specifications of the Rochester manufactured version of this device. Rochester Electronics guarantees the performance of its semiconductor products to the original OCM specifications. 'Typical' values are for reference purposes only. Certain minimum or maximum ratings may be based on product characterization, design, simulation, or sample testing.

54LS/74LS353

DUAL 4-INPUT MULTIPLEXER

(With 3-State Outputs)

DESCRIPTION — The '353 is a dual 4-input multiplexer with 3-state outputs. It can select two bits of data from four sources using common select inputs. The outputs may be individually switched to a high impedance state with a HIGH on the respective Output (OE) inputs, allowing the outputs to interface directly with bus oriented systems. It is fabricated with the Schottky barrier diode process for high speed and is completely compatible with all Fairchild TTL families.

- INVERTED VERSION OF 'LS253
- SCHOTTKY PROCESS FOR HIGH SPEED
- MULTIFUNCTION CAPABILITY


ORDERING CODE: See Section 9

PKGS	PIN OUT	COMMERCIAL GRADE	MILITARY GRADE	PKG TYPE
		V _{CC} = +5.0 V $\pm 5\%$, T _A = 0°C to +70°C	V _{CC} = +5.0 V $\pm 10\%$, T _A = -55°C to +125°C	
Plastic DIP (P)	A	74LS353PC		9B
Ceramic DIP (D)	A	74LS353DC	54LS353DM	6B
Flatpak (F)	A	74LS353FC	54LS353FM	4L


INPUT LOADING/FAN-OUT: See Section 3 for U.L. definitions

PIN NAMES	DESCRIPTION	54/74LS (U.L.) HIGH/LOW
I _{0a} — I _{3a}	Side A Data Inputs	0.5/0.25
I _{0b} — I _{3b}	Side B Data Inputs	0.5/0.25
S ₀ , S ₁	Common Select Inputs	0.5/0.25
OE _a	Side A Output Enable Input (Active LOW)	0.5/0.25
OE _b	Side B Output Enable Input (Active LOW)	0.5/0.25
Z _a , Z _b	3-State Outputs (Inverted)	65/15 (25)/(7.5)

LOGIC SYMBOL

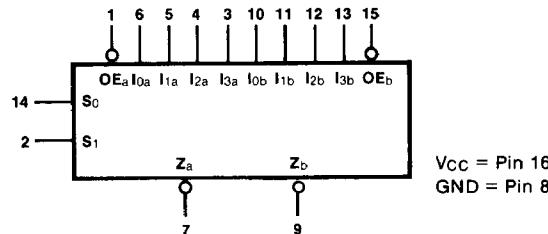

CONNECTION DIAGRAM PINOUT A



FUNCTIONAL DESCRIPTION — The '353 contains two identical 4-input multiplexers with 3-state outputs. They select two bits from four sources selected by common Select inputs (S_0 , S_1). The 4-input multiplexers have individual Output Enable (\overline{OE}_a , \overline{OE}_b) inputs which when HIGH, force the outputs to a high impedance (high Z) state. The logic equations for the outputs are shown below:

$$\bar{Z}_a = \overline{OE}_a \cdot (I_{0a} \cdot \bar{S}_1 \cdot \bar{S}_0 + I_{1a} \cdot \bar{S}_1 \cdot S_0 + I_{2a} \cdot S_1 \cdot \bar{S}_0 + I_{3a} \cdot S_1 \cdot S_0)$$

$$\bar{Z}_b = \overline{OE}_b \cdot (I_{0b} \cdot \bar{S}_1 \cdot \bar{S}_0 + I_{1b} \cdot \bar{S}_1 \cdot S_0 + I_{2b} \cdot S_1 \cdot \bar{S}_0 + I_{3b} \cdot S_1 \cdot S_0)$$

If the outputs of 3-state devices are tied together, all but one device must be in the high impedance state to avoid high currents that would exceed the maximum ratings. Designers should ensure that Output Enable signals to 3-state devices whose outputs are tied together are designed so that there is no overlap.

TRUTH TABLE

SELECT INPUTS		DATA INPUTS				OUTPUT ENABLE	OUTPUT
S_0	S_1	I_0	I_1	I_2	I_3	\overline{OE}	\bar{Z}
X	X	X	X	X	X	H	(Z)
L	L	L	X	X	X	L	H
L	L	H	X	X	X	L	L
H	L	X	L	X	X	L	H
H	L	X	H	X	X	L	L
L	H	X	X	L	X	L	H
L	H	X	X	H	X	L	L
H	H	X	X	X	L	L	H
H	H	X	X	X	H	L	L

Address inputs S_0 and S_1 are common to both sections.


H = HIGH Voltage Level

L = LOW Voltage Level

X = Immaterial

(Z) = High Impedance

LOGIC DIAGRAM

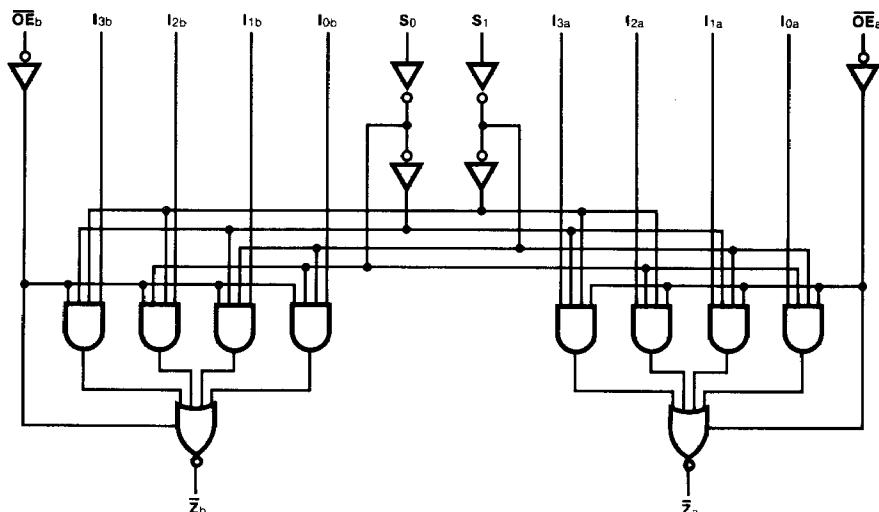

DC CHARACTERISTICS OVER OPERATING TEMPERATURE RANGE (unless otherwise specified)

SYMBOL	PARAMETER	54/74LS		UNITS	CONDITIONS
		Min	Max		
I _{CC}	Power Supply Current	Outputs HIGH	12	mA	V _{CC} = Max I _n , S _n , O _E _n = Gnd
		Outputs OFF	14		V _{CC} = Max, O _E _n = 4.5 V I _n , S _n = Gnd

AC CHARACTERISTICS: V_{CC} = +5.0 V, T_A = +25°C (See Section 3 for waveforms and load configurations)

SYMBOL	PARAMETER	54/74LS		UNITS	CONDITIONS		
		C _L = 45 pF					
		Min	Max				
t _{PLH} t _{PHL}	Propagation Delay S _n to Z _n	24 32		ns	Figs. 3-1, 3-20		
t _{PLH} t _{PHL}	Propagation Delay I _n to Z _n	15 15		ns	Figs. 3-1, 3-4		
t _{PZH} t _{PZL}	Output Enable Time	18 18		ns	Figs. 3-3, 3-11, 3-12 R _L = 667Ω		
t _{PHZ} t _{PLZ}	Output Disable Time	18 18		ns	Figs. 3-3, 3-11, 3-12 R _L = 667Ω, C _L = 5 pF		