

SACC-CI-M12FS-17CON-L90 - Contact carrier



1424197

<https://www.phoenixcontact.com/us/products/1424197>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact carrier, 17-position, Socket, angled, M12, coding: A, PCB mounting, Wave soldering, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239454

Your advantages

- Reduced mounting costs thanks to two-piece device connector
- All common pin assignments and codings available
- Easy device integration thanks to mechanical port screw connections with threaded attachment, press-in contour or direct integration in the front plate

Commercial data

| | |
|--------------------------------------|---------------------|
| Item number | 1424197 |
| Packing unit | 20 pc |
| Minimum order quantity | 20 pc |
| Sales key | AB23 |
| Product key | ABQAHS |
| Catalog page | Page 253 (C-2-2013) |
| GTIN | 4046356692915 |
| Weight per piece (including packing) | 6.924 g |
| Weight per piece (excluding packing) | 6.46 g |
| Customs tariff number | 85366990 |
| Country of origin | DE |

SACC-CI-M12FS-17CON-L90 - Contact carrier



1424197

<https://www.phoenixcontact.com/us/products/1424197>

Technical data

Notes

| | |
|--------------------|--|
| Notes on operation | The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration. |
|--------------------|--|

Product properties

| | |
|---------------------|----------------|
| Product type | Contact insert |
| Application | Signal |
| Number of positions | 17 |
| Shielded | no |
| Coding | A |
| Thread type | M12 |

Data management status

| | |
|------------------|----|
| Article revision | 06 |
|------------------|----|

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Electrical properties

| | |
|-----------------------|----------------------------|
| Rated surge voltage | 0.8 kV |
| Contact resistance | $\leq 3 \text{ m}\Omega$ |
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage U_N | 30 V |
| Nominal current I_N | 1.5 A |

Connection data

| | |
|-------------------|----------------|
| Connection method | Wave soldering |
|-------------------|----------------|

Signaling

| | |
|------------------------|----|
| Status display | no |
| Status display present | No |

Material specifications

| | |
|--|-------|
| Flammability rating according to UL 94 | V0 |
| Contact material | CuZn |
| Contact surface material | Au |
| Contact carrier material | PA 6T |

Connector

SACC-CI-M12FS-17CON-L90 - Contact carrier



1424197

<https://www.phoenixcontact.com/us/products/1424197>

Connection 1

| | |
|-------------------|--------|
| Head design | Socket |
| Head cable outlet | angled |
| Head thread type | M12 |
| Coding | A |

Mechanical properties

Mechanical data

| | |
|-----------------------------|-------|
| Insertion/withdrawal cycles | > 100 |
|-----------------------------|-------|

Environmental and real-life conditions

Ambient conditions

| | |
|---------------------------------|---|
| Degree of protection | IP67 |
| | IP67, when in locked state |
| Ambient temperature (operation) | -25 °C ... 85 °C (Plug / socket) |
| | -40 °C ... 85 °C (without mechanical actuation) |

Standards and regulations

M12

| | |
|--------------------------|-----------------|
| Standard designation | M12 connector |
| Standards/specifications | IEC 61076-2-101 |

Mounting

| | |
|---------------|--------------|
| Mounting type | PCB mounting |
| Thread type | () |

Packaging specifications


| | |
|-------------------|---------|
| Type of packaging | Blister |
|-------------------|---------|

1424197

<https://www.phoenixcontact.com/us/products/1424197>

Drawings

Schematic diagram

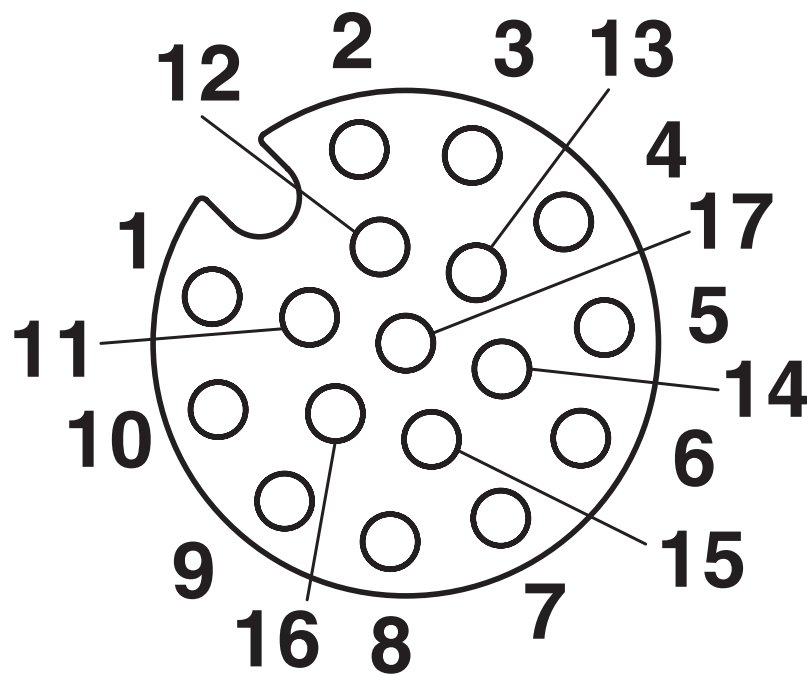

Pin assignment M12, 12-pos., female side view

SACC-CI-M12FS-17CON-L90 - Contact carrier




1424197

<https://www.phoenixcontact.com/us/products/1424197>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1424197>

| | | | | |
|---|-------------------------------|-----------------------|-------------------|-----------------------------|
|  | UL Recognized | | | |
| | Approval ID: E118976-20100522 | | | |
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| | 30 V | 1.5 A | 26 - 26 | - |

SACC-CI-M12FS-17CON-L90 - Contact carrier



1424197

<https://www.phoenixcontact.com/us/products/1424197>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27440102 |
| ECLASS-12.0 | 27440116 |
| ECLASS-13.0 | 27460201 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC002637 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

Environmental product compliance

| | |
|---|------|
| EU RoHS | |
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 6(c) |

| | |
|--|---|
| China RoHS | |
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

| | |
|-------------------------------------|--------------------------------------|
| EU REACH SVHC | |
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | 371125a6-3d4c-44e9-8ff8-bef072e58cbf |