
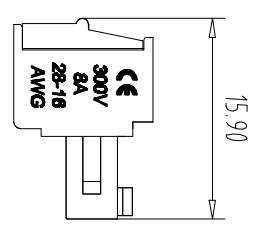
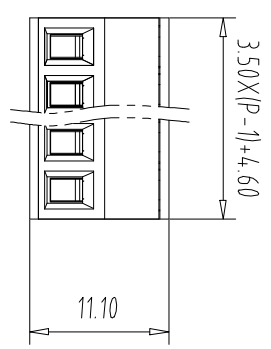
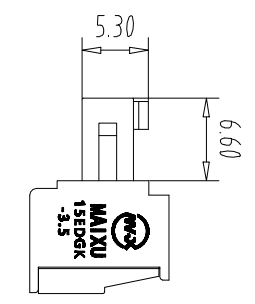


注: 本型产品禁止运输、复制、编辑被控, 以及用其内容建设数据库

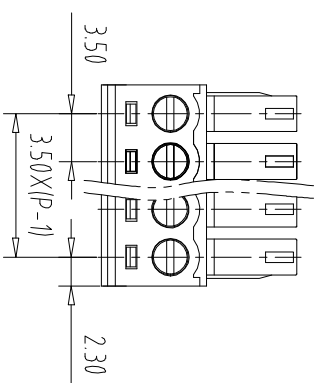

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard	1. Use group	B	C	D
Rated Current	8A	/	/	8A
Rated Voltage	300V	/	/	300V

2. Torque value: M2.0, 1.77Lb.in

3. Wire range: 28~16AWG

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	7A	7A	7A

2. Torque value: M2, 0.2Nm

3. wire range: 0.2~1.5mm²

NOTES2:

1.Housing: PA66 (UL 94V-0)

2.Cover: PA66 (UL 94V-0)

3.Cage: Brass (Ni Plated)

4.Clamp: Copper alloy (Ni Plated)

5.Screw: Steel (M2.0,Zn Plated)

NOTES3:

1.Pitch: 3.5mm Poles: 02-24P

2.Stripping length: 6-7mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

How to order

MX15EDGK - 3.5 - XXP - XXXX - XX - X - X

产品型号 间距 颜色: 01:常频颜色
 灰色:GY 橙色:OE 定制颜色
 蓝色:BU 红色:RD
 黑色:BK 透明色:TT
 绿色:GN 黄色:YW 白色:WE

极数
 0-Y:一字螺丝
 1:S:十字螺丝
 2:P:平头十字螺丝
 A-Z:其他定制
 Cu:铜方块
 Fe:铁方块

Pitch Range In mm		Nominal Dimension Range In mm		Nominal Dimension Range	
Over	In	Over	In	Over	In
6	10	30	60	60	100
TO	TO	TO	TO	TO	TO
6	10	24	30	60	100
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70
±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
±1.00	±1.30	±1.00	±1.30	±1.00	±1.30

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	22.09.14	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	A4 / 1/1
APP.	DATE	NAME	MX15EDGK-3.5-XXP		

CI XI MAIXU ELECTRONICS CO.,LTD.
 MAIXU 慈溪市迈旭电子有限公司
 DWGNO.