

Typical Performance Curves

1.0 TYPICAL PERFORMANCE CURVES

Note: The following performance graphs are for the devices that are documented in the MCP47FEBXX data sheet (DS20005375A). This document allows the MCP47FEBXX data sheet's functional description to be in PDF format with a file size smaller than the 10 MB limit of many email file servers.

The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

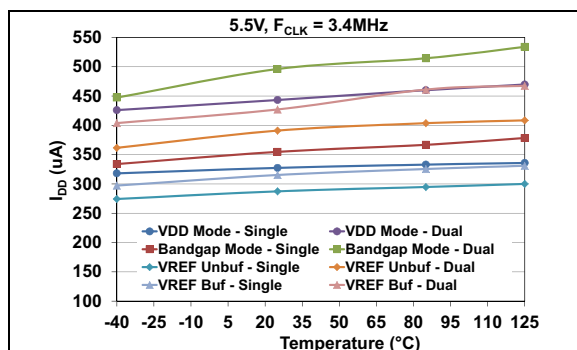


FIGURE 1-1: Average Device Supply Active Current (I_{DDA}) (at 5.5V and $F_{SCL} = 3.4\text{MHz}$) vs. Temperature and DAC Reference Voltage Mode.

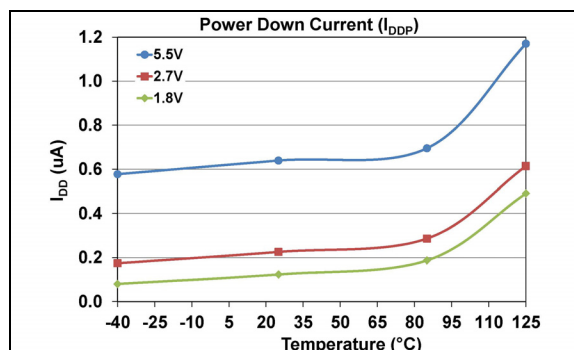


FIGURE 1-3: Average Power Down Current (I_{DDP}) vs. Temperature and Voltage.

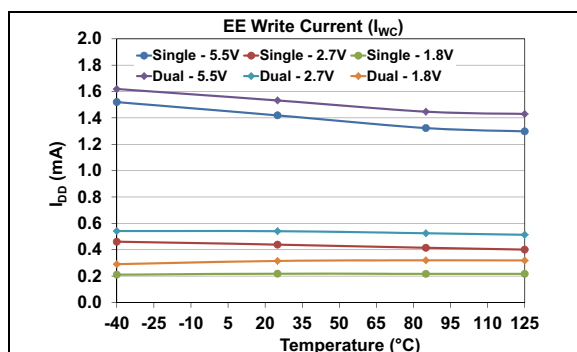


FIGURE 1-2: Average Device EEPROM Write Cycle Current (I_{WC}) vs. Temperature and Voltage. (MCP47FEBXX only)

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

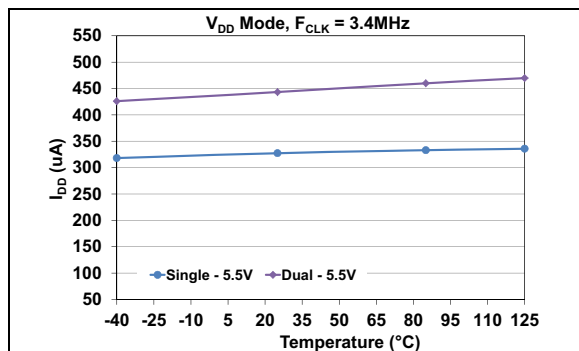


FIGURE 1-4: Average Device Supply Current - Active Interface (I_{DDA}) ($F_{SCL} = 3.4\text{MHz}$) vs. Voltage and Temperature, $VRxB:VRxA = '00'$ (V_{DD} mode).

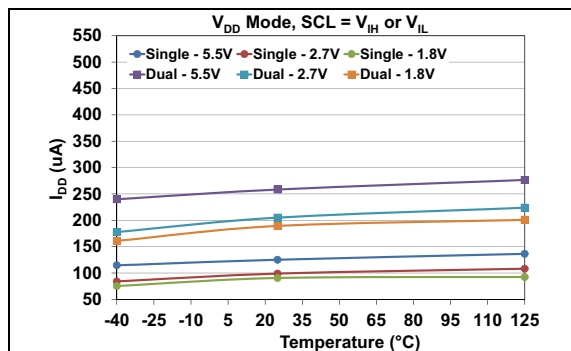


FIGURE 1-7: Average Device Supply Current - Inactive Interface (I_{DD}) ($F_{SCL} = V_{IH}$ or V_{IL}) vs. Voltage and Temperature, $VRxB:VRxA = '00'$ (V_{DD} mode).

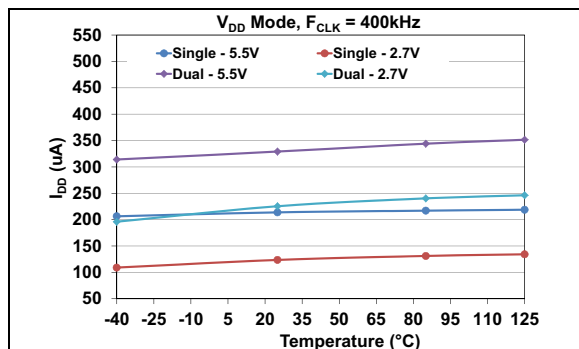


FIGURE 1-5: Average Device Supply Current - Active Interface (I_{DDA}) ($F_{SCL} = 400\text{kHz}$) vs. Voltage and Temperature, $VRxB:VRxA = '00'$ (V_{DD} mode).

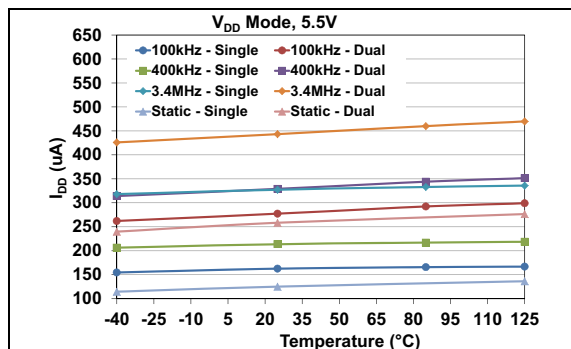


FIGURE 1-8: Average Device Supply Current vs. F_{SCL} Frequency, Voltage and Temperature, $VRxB:VRxA = '00'$ (V_{DD} mode).

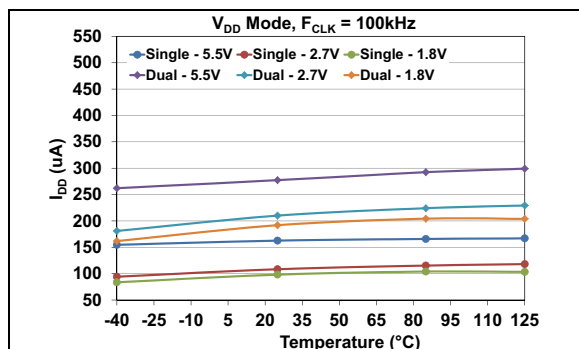


FIGURE 1-6: Average Device Supply Current - Active Interface (I_{DDA}) ($F_{SCL} = 100\text{kHz}$) vs. Voltage and Temperature, $VRxB:VRxA = '00'$ (V_{DD} mode).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

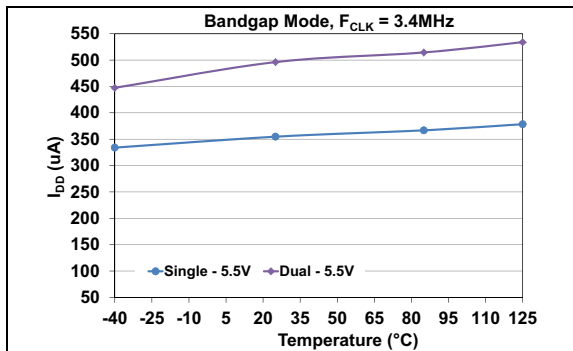


FIGURE 1-9: Average Device Supply Current - Active Interface (I_{DDA}) ($F_{SCL} = 3.4\text{MHz}$) vs. Voltage and Temperature, $VRxB:VRxA = '01'$ (Bandgap mode).

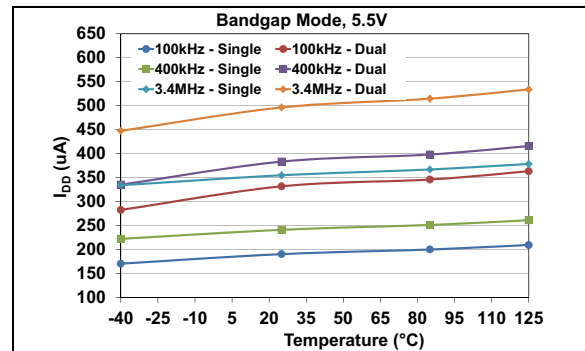


FIGURE 1-12: Average Device Supply Current vs. F_{SCL} Frequency, Voltage and Temperature, $VRxB:VRxA = '01'$ (Bandgap mode).

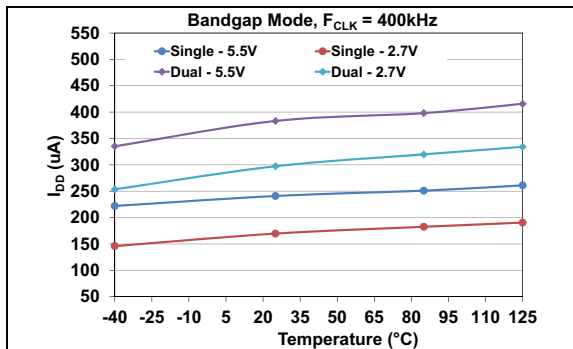


FIGURE 1-10: Average Device Supply Current - Active Interface (I_{DDA}) ($F_{SCL} = 400\text{kHz}$) vs. Voltage and Temperature, $VRxB:VRxA = '01'$ (Bandgap mode).

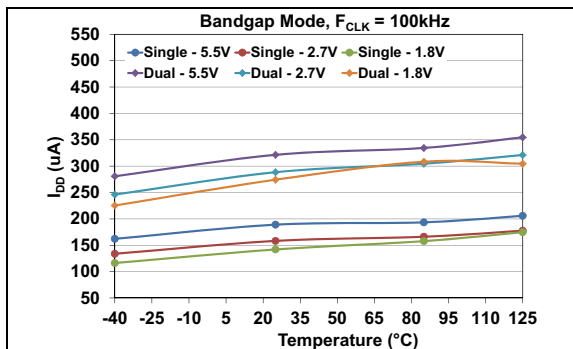


FIGURE 1-11: Average Device Supply Current - Active Interface (I_{DDA}) ($F_{SCL} = 100\text{kHz}$) vs. Voltage and Temperature, $VRxB:VRxA = '01'$ (Bandgap mode).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

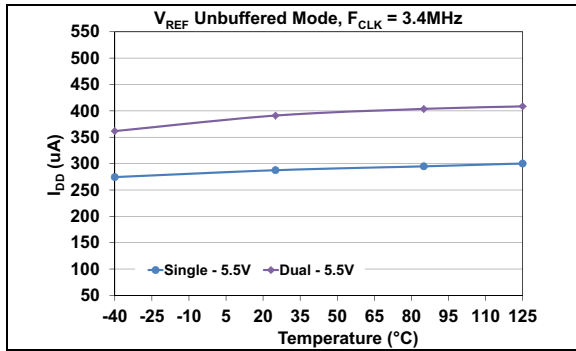


FIGURE 1-13: Average Device Supply Current - Active Interface (I_{DDA}) ($F_{SCL} = 3.4\text{MHz}$) vs. Voltage and Temperature, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered mode).

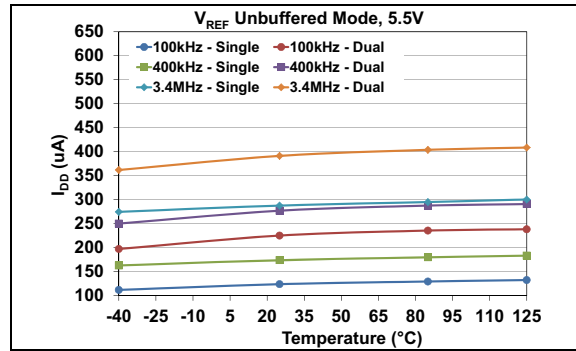


FIGURE 1-16: Average Device Supply Current vs. F_{SCL} Frequency, Voltage and Temperature, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered mode).

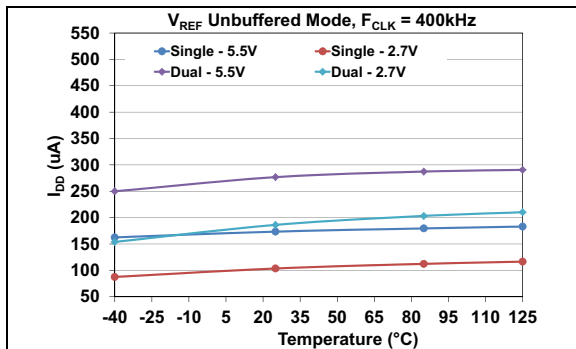


FIGURE 1-14: Average Device Supply Current - Active Interface (I_{DDA}) ($F_{SCL} = 400\text{kHz}$) vs. Voltage and Temperature, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered mode).

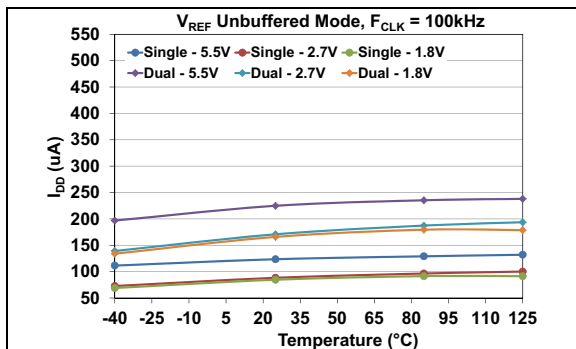


FIGURE 1-15: Average Device Supply Current - Active Interface (I_{DDA}) ($F_{SCL} = 100\text{kHz}$) vs. Voltage and Temperature, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered mode).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

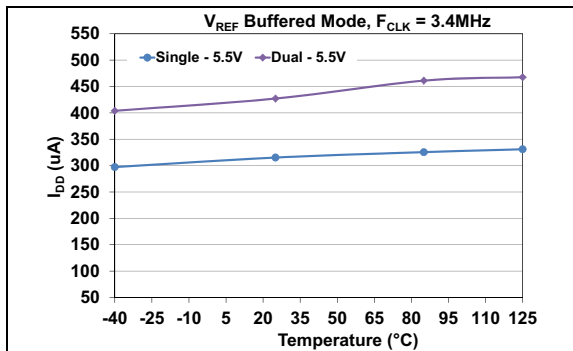


FIGURE 1-17: Average Device Supply Current - Active Interface (I_{DDA}) ($F_{SCL} = 3.4\text{MHz}$) vs. Voltage and Temperature, $VRxB:VRxA = '11'$ (V_{REF} Buffered mode).

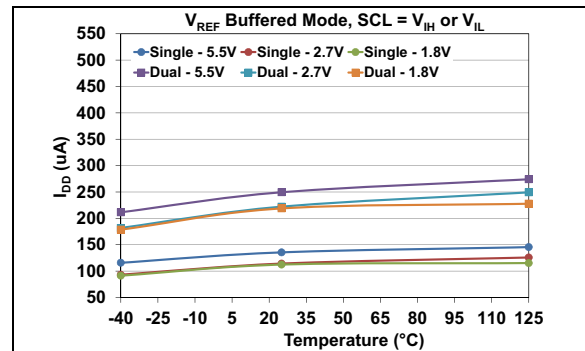


FIGURE 1-20: Average Device Supply Current - Inactive Interface (I_{DD}) ($F_{SCL} = V_{IH}$ or V_{IL}) vs. Voltage and Temperature, $VRxB:VRxA = '11'$ (V_{REF} Buffered mode).

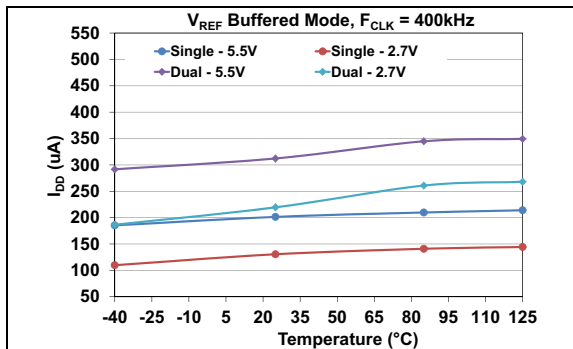


FIGURE 1-18: Average Device Supply Current - Active Interface (I_{DDA}) ($F_{SCL} = 400\text{kHz}$) vs. Voltage and Temperature, $VRxB:VRxA = '11'$ (V_{REF} Buffered mode).

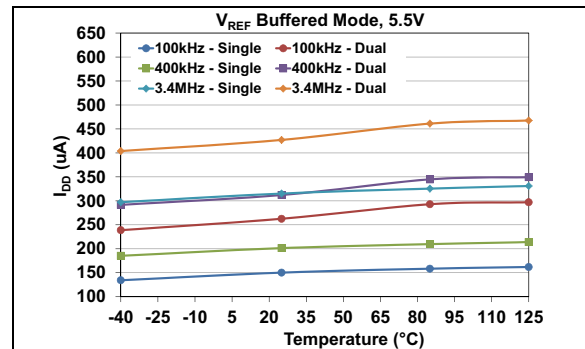


FIGURE 1-21: Average Device Supply Current vs. F_{SCL} Frequency, Voltage and Temperature, $VRxB:VRxA = '11'$ (V_{REF} Buffered mode).

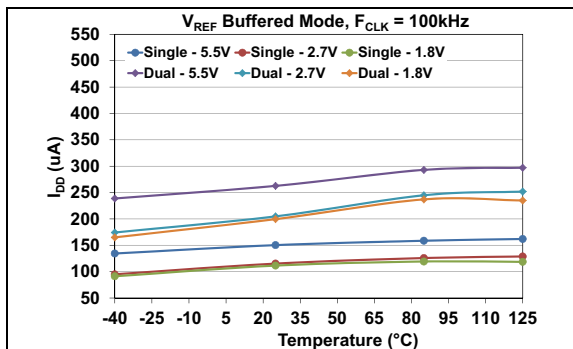


FIGURE 1-19: Average Device Supply Current - Active Interface (I_{DDA}) ($F_{SCL} = 100\text{kHz}$) vs. Voltage and Temperature, $VRxB:VRxA = '11'$ (V_{REF} Buffered mode).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

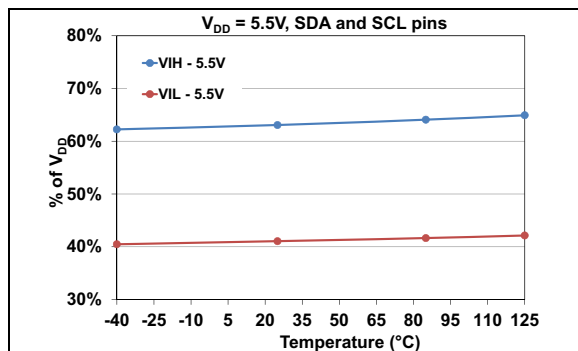


FIGURE 1-22: Average V_{IH} and V_{IL} (SDA and SCL pins) ($V_{DD} = 5.5\text{V}$) vs. Temperature.

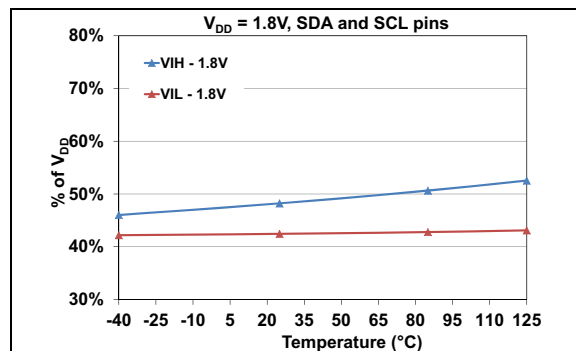


FIGURE 1-25: Average V_{IH} and V_{IL} (SDA and SCL pins) ($V_{DD} = 1.8\text{V}$) vs. Temperature.

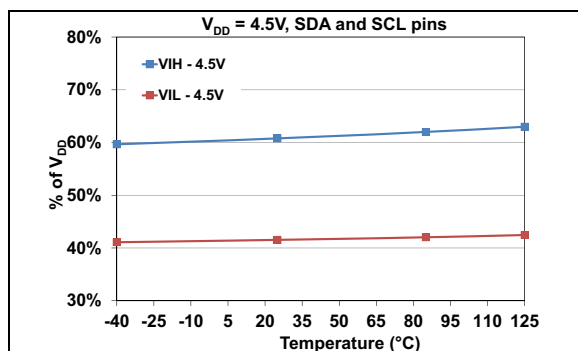


FIGURE 1-23: Average V_{IH} and V_{IL} (SDA and SCL pins) ($V_{DD} = 4.5\text{V}$) vs. Temperature.

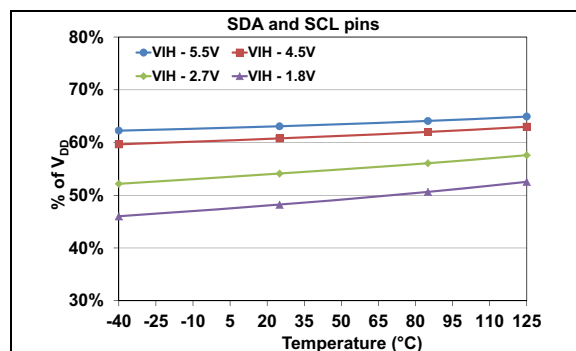


FIGURE 1-26: Average V_{IH} (SDA and SCL pins) vs. Voltage and Temperature.

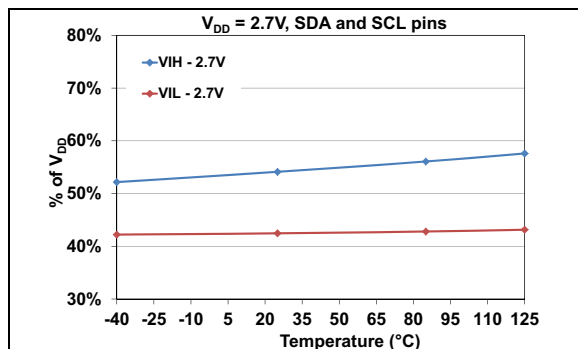


FIGURE 1-24: Average V_{IH} and V_{IL} (SDA and SCL pins) ($V_{DD} = 2.7\text{V}$) vs. Temperature.

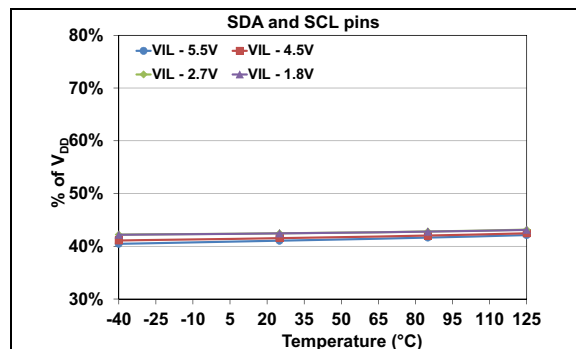


FIGURE 1-27: Average V_{IL} (SDA and SCL pins) vs. Voltage and Temperature.

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

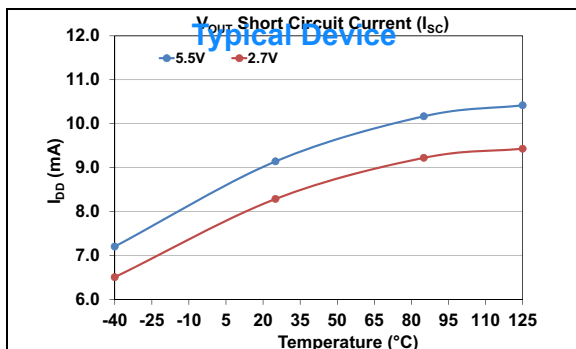


FIGURE 1-28: V_{OUT} Short Circuit Current (I_{SC}) vs. Voltage and Temperature.

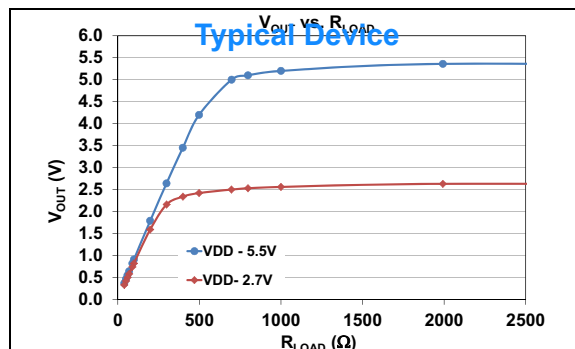


FIGURE 1-31: V_{OUT} vs. R_{LOAD} and Voltage (at $+25^\circ\text{C}$) (R_{LOAD} 0Ω - 2500Ω)

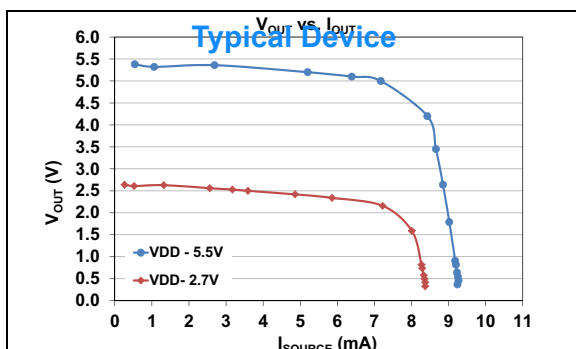


FIGURE 1-29: V_{OUT} vs. I_{OUT} and Voltage (at $+25^\circ\text{C}$)

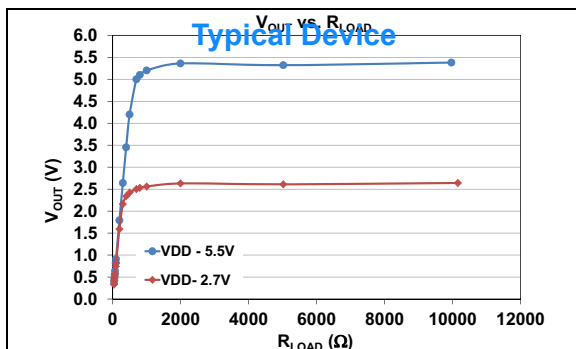


FIGURE 1-30: V_{OUT} vs. R_{LOAD} and Voltage (at $+25^\circ\text{C}$)

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '00'$ (V_{DD} Mode), $Gx = '0'$ (1x)

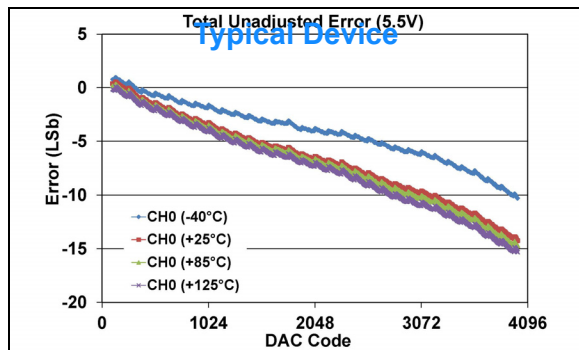


FIGURE 1-32: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB21**)
(12-bit: $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

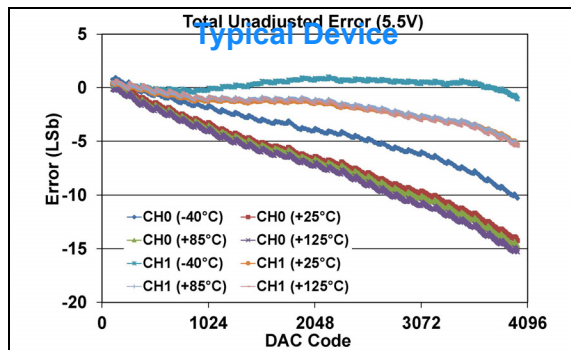


FIGURE 1-35: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB22**)
(12-bit: $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

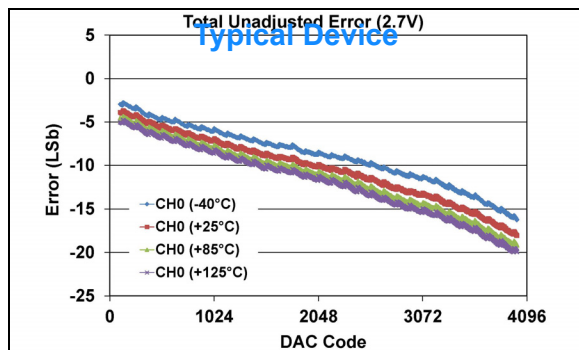


FIGURE 1-33: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB21**)
(12-bit: $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

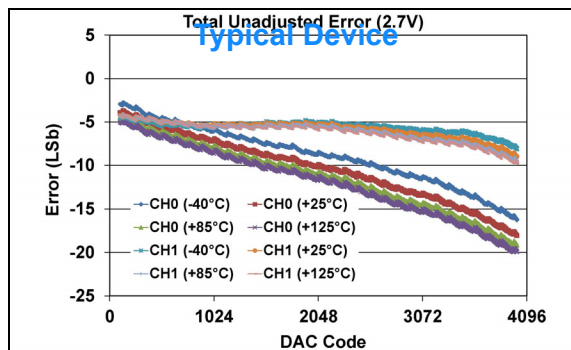


FIGURE 1-36: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB22**)
(12-bit: $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

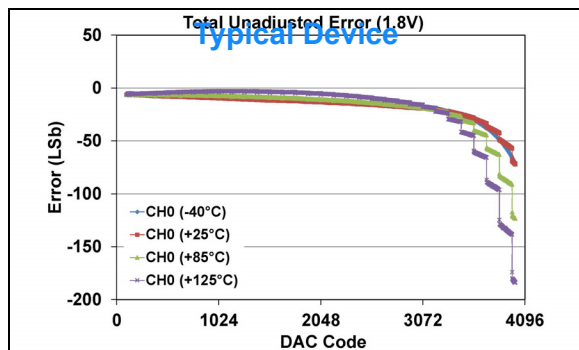


FIGURE 1-34: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB21**)
(12-bit: $V_{DD} = 1.8\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x))
(see [Appendix B.1](#) for additional information).

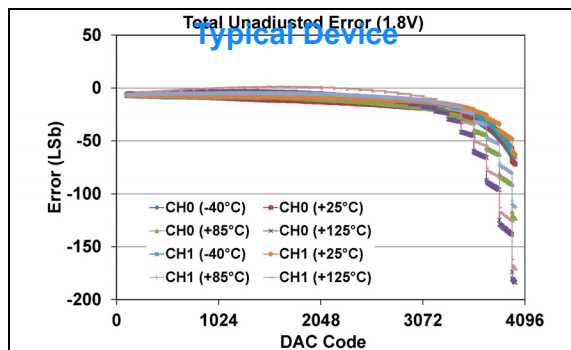


FIGURE 1-37: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB22**)
(12-bit: $V_{DD} = 1.8\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x))
(see [Appendix B.1](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '00'$ (V_{DD} Mode), $Gx = '0'$ (1x)

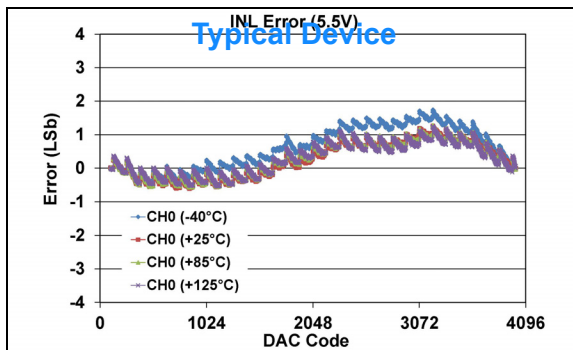


FIGURE 1-38: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

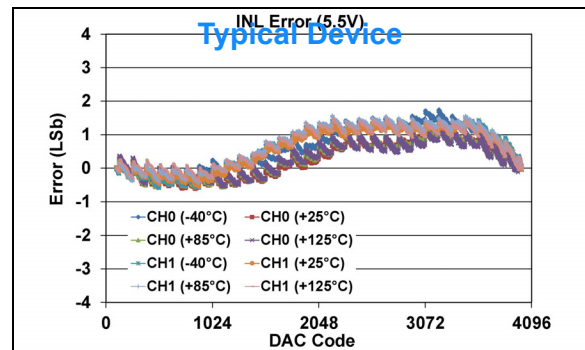


FIGURE 1-41: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

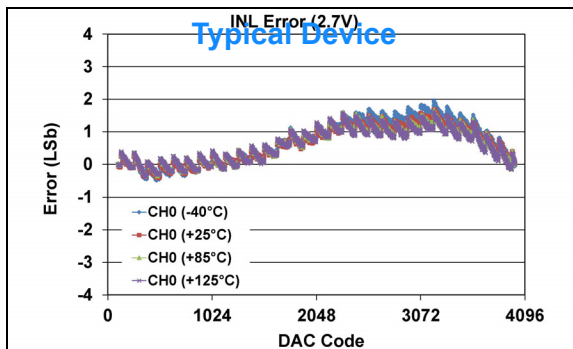


FIGURE 1-39: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

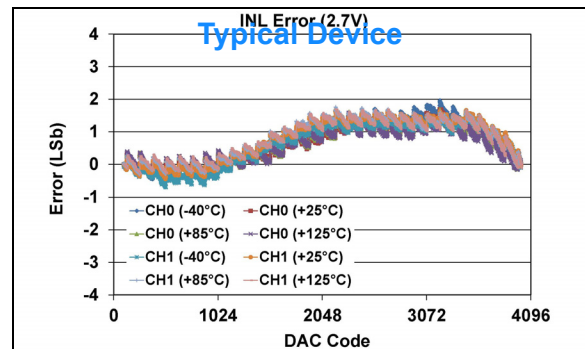


FIGURE 1-42: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

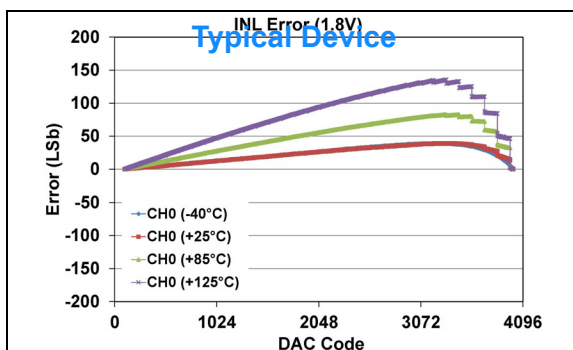


FIGURE 1-40: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x))
(see [Appendix B.1](#) for additional information).

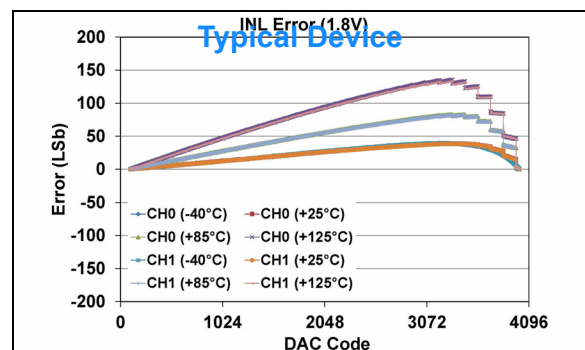


FIGURE 1-43: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x))
(see [Appendix B.1](#) for additional information).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '00'$ (V_{DD} Mode), $Gx = '0'$ (1x)

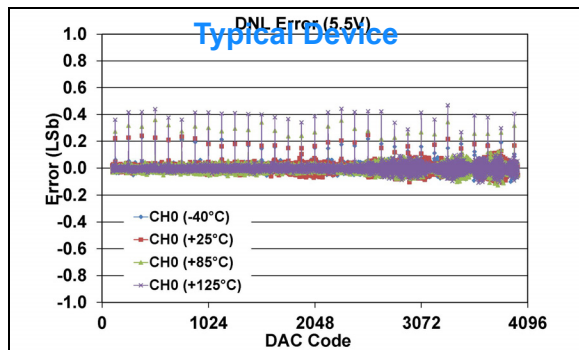


FIGURE 1-44: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(12-bit: $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

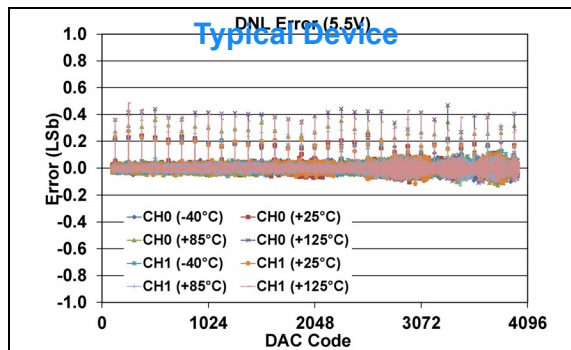


FIGURE 1-47: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(12-bit: $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

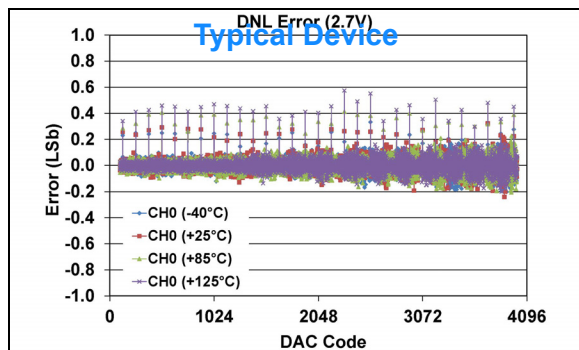


FIGURE 1-45: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(12-bit: $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

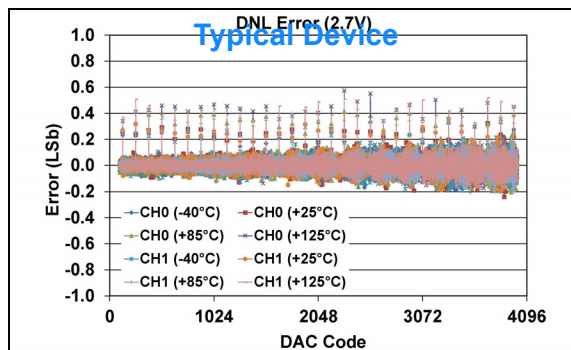


FIGURE 1-48: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(12-bit: $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

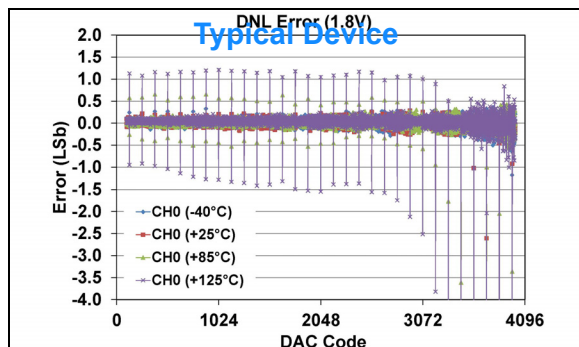


FIGURE 1-46: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(12-bit: $V_{DD} = 1.8\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x))
(see [Appendix B.1](#) for additional information).

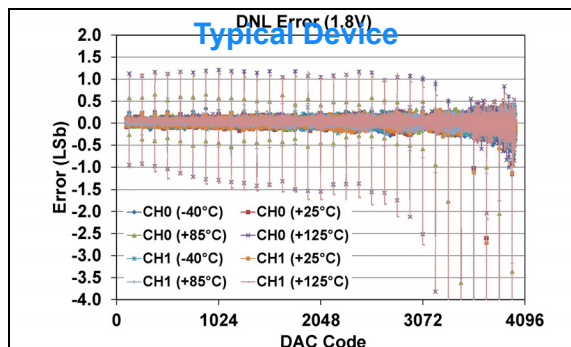


FIGURE 1-49: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(12-bit: $V_{DD} = 1.8\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x))
(see [Appendix B.1](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: VRxB:VRxA = '01' (Bandgap Mode)

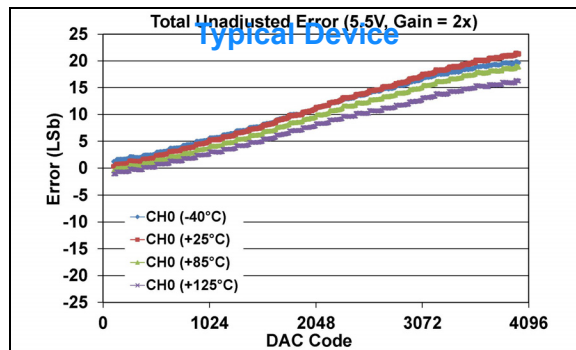


FIGURE 1-50: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB21)
(12-bit: $V_{DD} = 5.5\text{V}$, VRxB:VRxA = '01' (Bandgap), Gx = '1' (2x)).

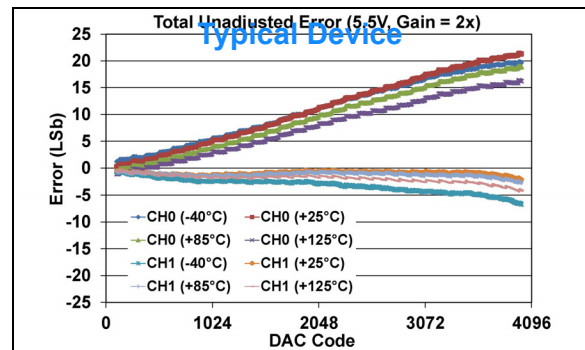


FIGURE 1-53: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB22)
(12-bit: $V_{DD} = 5.5\text{V}$, VRxB:VRxA = '01' (Bandgap), Gx = '1' (2x)).

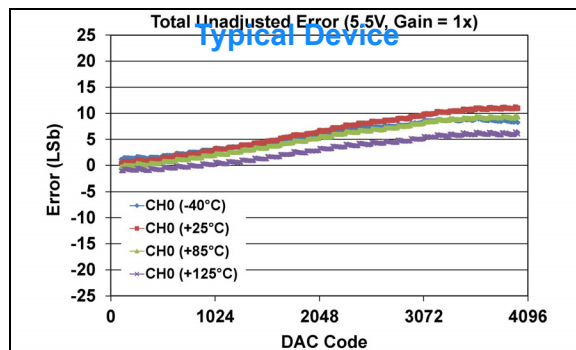


FIGURE 1-51: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB21)
(12-bit: $V_{DD} = 5.5\text{V}$, VRxB:VRxA = '01' (Bandgap), Gx = '0' (1x)).

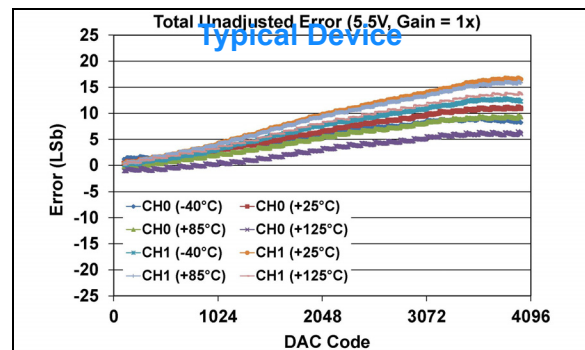


FIGURE 1-54: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB22)
(12-bit: $V_{DD} = 5.5\text{V}$, VRxB:VRxA = '01' (Bandgap), Gx = '0' (1x)).

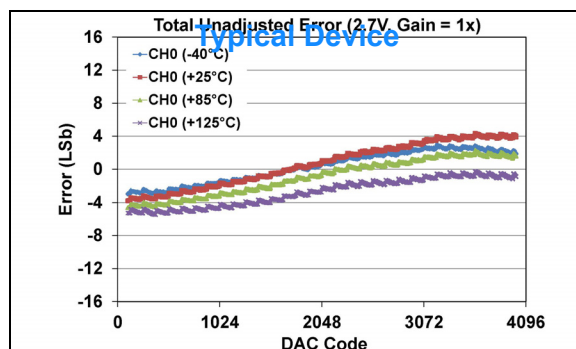


FIGURE 1-52: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB21)
(12-bit: $V_{DD} = 2.7\text{V}$, VRxB:VRxA = '01' (Bandgap), Gx = '0' (1x)).

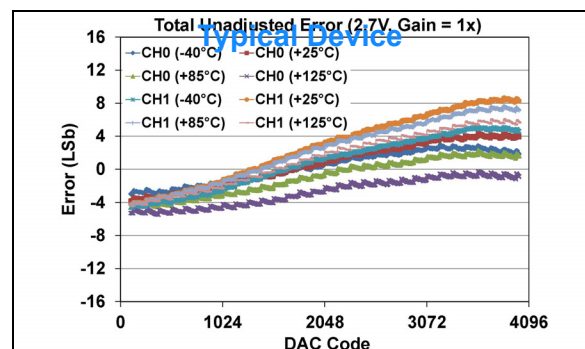


FIGURE 1-55: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB22)
(12-bit: $V_{DD} = 2.7\text{V}$, VRxB:VRxA = '01' (Bandgap), Gx = '0' (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '01'$ (Bandgap Mode)

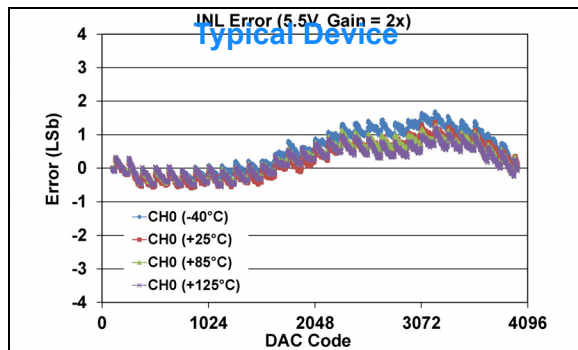


FIGURE 1-56: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(12-bit: $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $Gx = '1'$ (2x)).

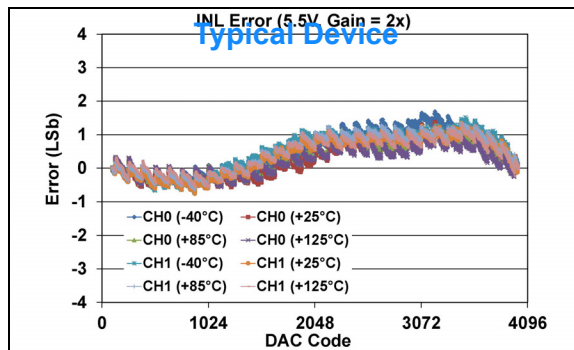


FIGURE 1-59: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(12-bit: $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $Gx = '1'$ (2x)).

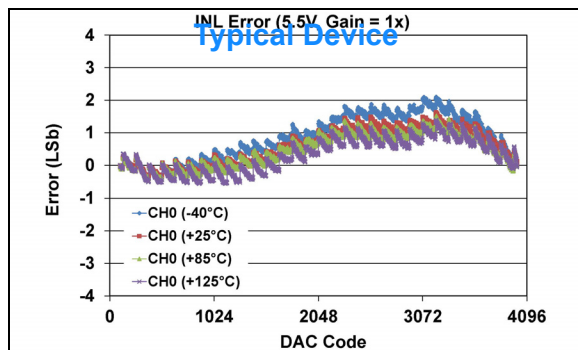


FIGURE 1-57: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(12-bit: $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $Gx = '0'$ (1x)).

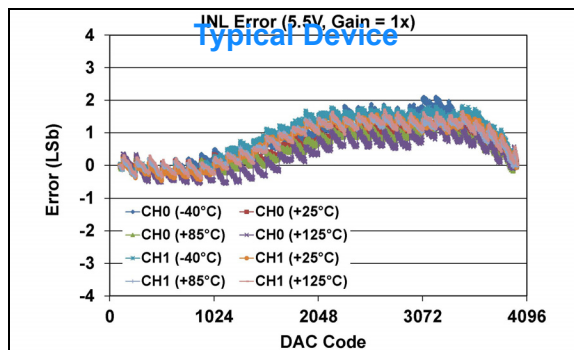


FIGURE 1-60: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(12-bit: $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $Gx = '0'$ (1x)).

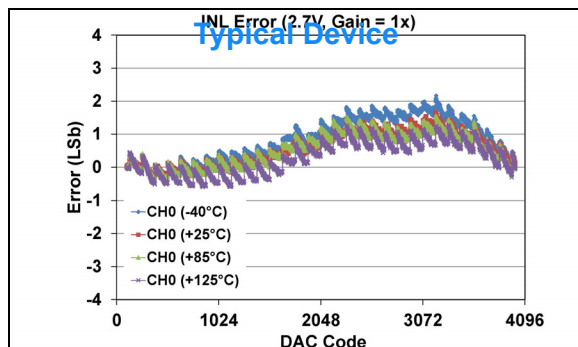


FIGURE 1-58: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(12-bit: $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $Gx = '0'$ (1x)).

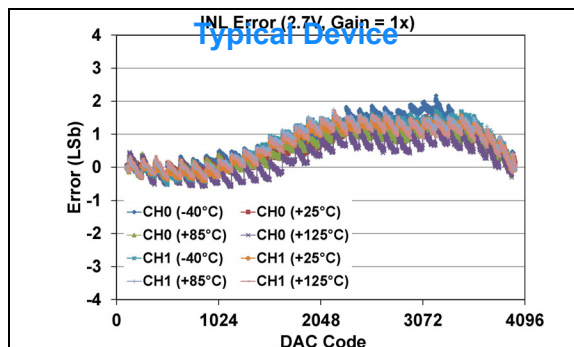


FIGURE 1-61: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(12-bit: $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $Gx = '0'$ (1x)).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '01'$ (Bandgap Mode)

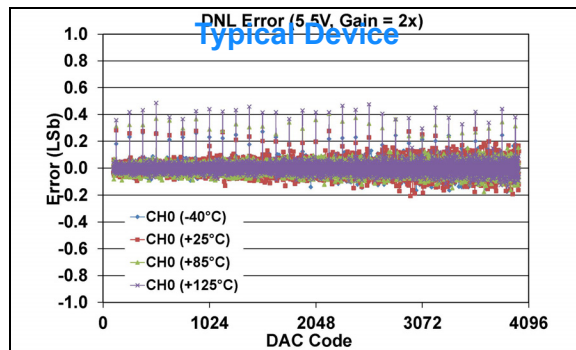


FIGURE 1-62: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - MCP47FXB21) (**12-bit:** $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $G_x = '1'$ (2x)).

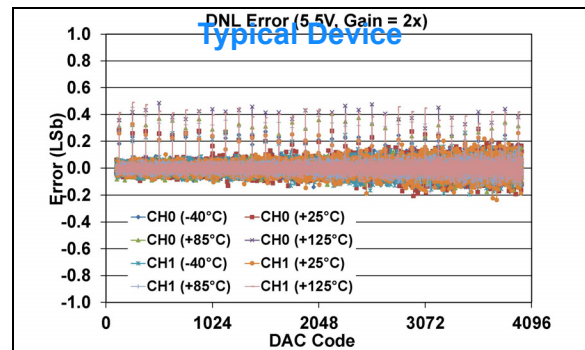


FIGURE 1-65: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - MCP47FXB22) (**12-bit:** $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $G_x = '1'$ (2x)).

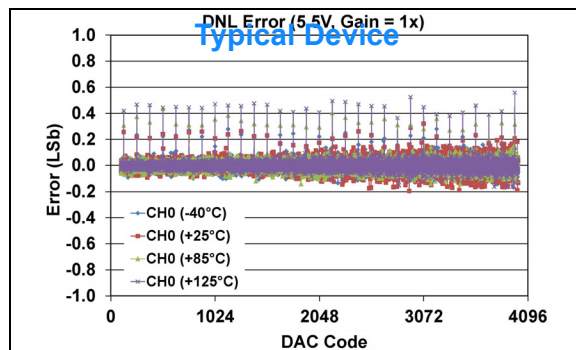


FIGURE 1-63: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - MCP47FXB21) (**12-bit:** $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $G_x = '0'$ (1x)).

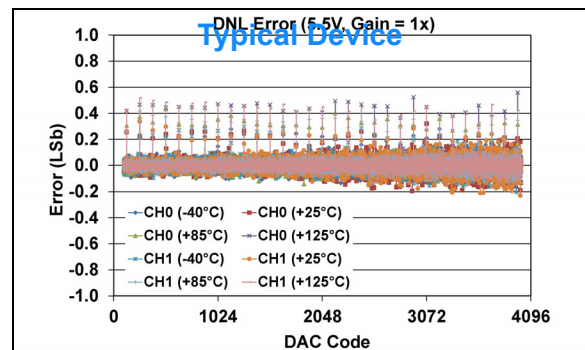


FIGURE 1-66: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - MCP47FXB22) (**12-bit:** $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $G_x = '0'$ (1x)).

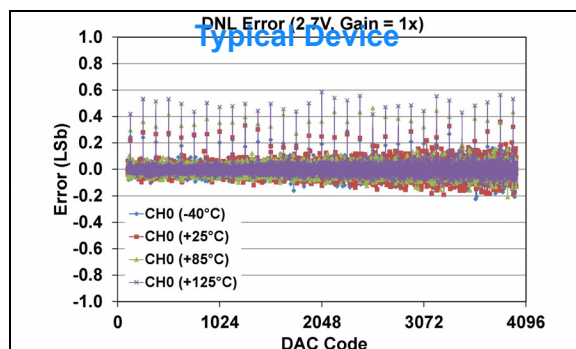


FIGURE 1-64: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - MCP47FXB21) (**12-bit:** $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $G_x = '0'$ (1x)).

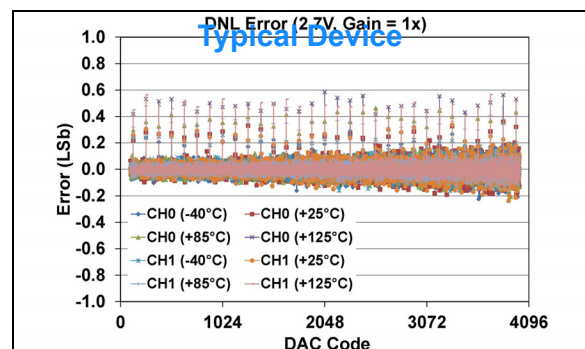


FIGURE 1-67: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - MCP47FXB22) (**12-bit:** $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $G_x = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = V_{DD}$, $Gx = '0'$ (1x)

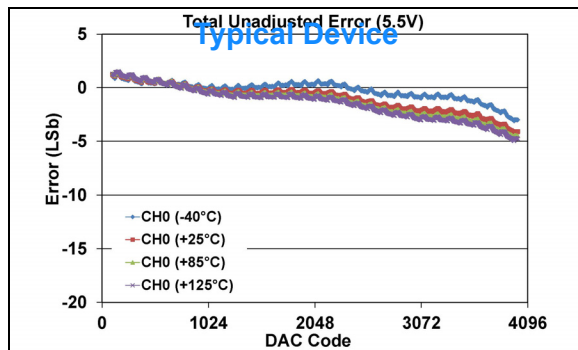


FIGURE 1-68: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

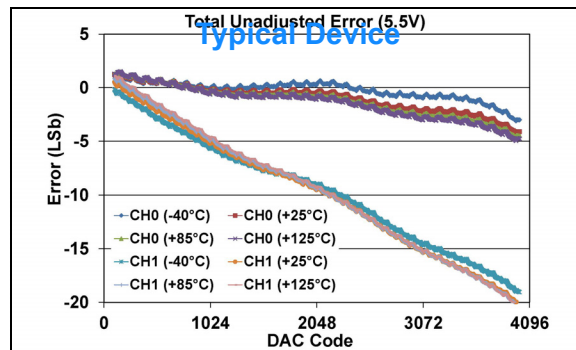


FIGURE 1-71: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

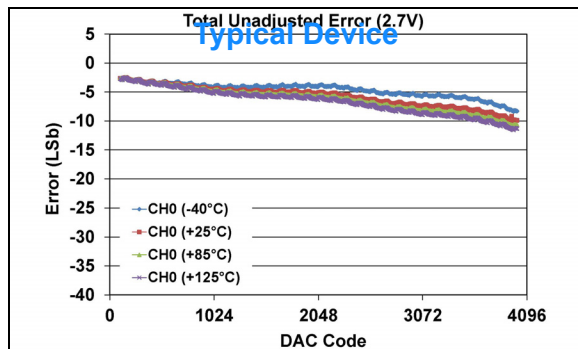


FIGURE 1-69: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

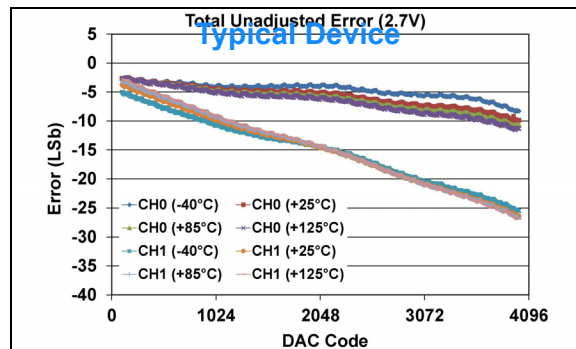


FIGURE 1-72: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

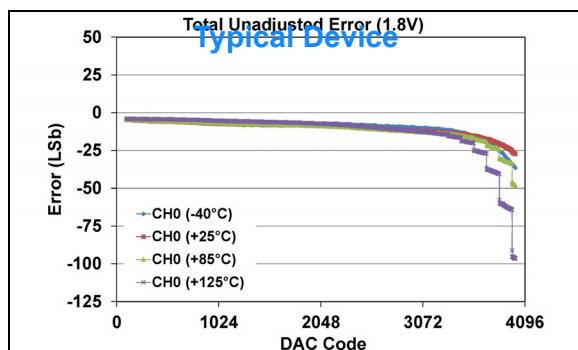


FIGURE 1-70: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x))
(see [Appendix B.2](#) for additional information).

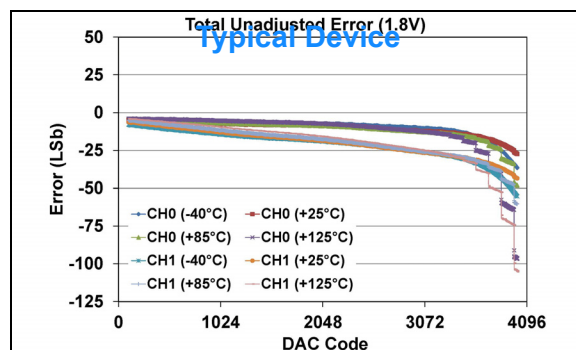


FIGURE 1-73: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x))
(see [Appendix B.2](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = V_{DD}$, $Gx = '0'$ (1x)

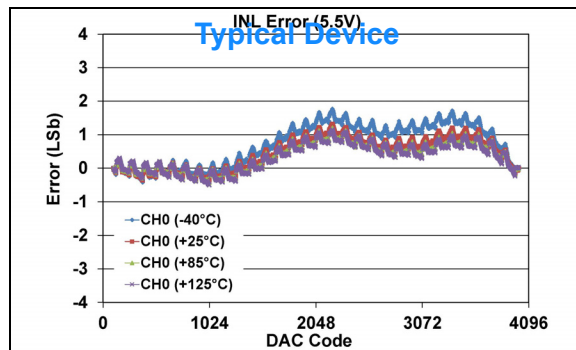


FIGURE 1-74: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

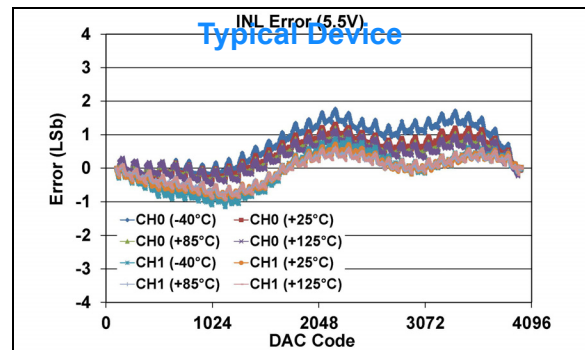


FIGURE 1-77: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

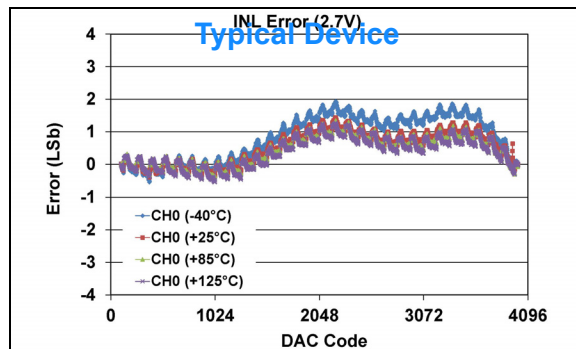


FIGURE 1-75: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

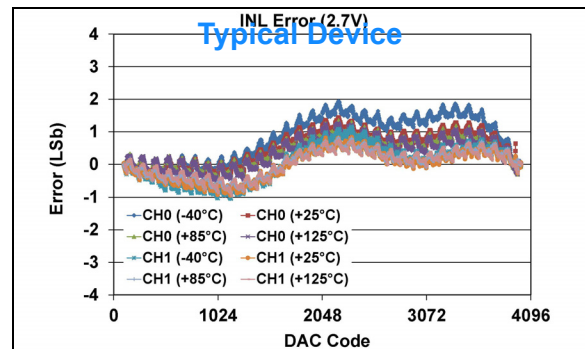


FIGURE 1-78: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

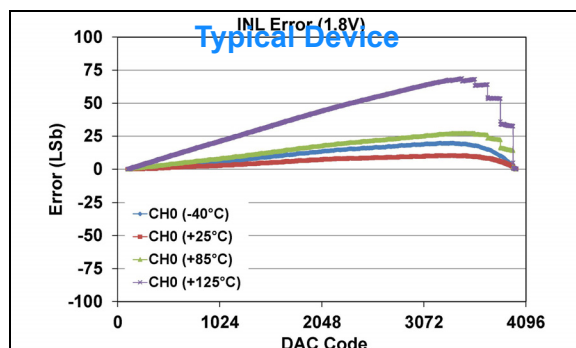


FIGURE 1-76: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x))
(see [Appendix B.2](#) for additional information).

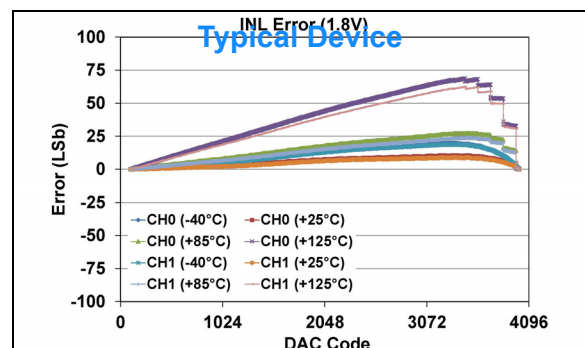


FIGURE 1-79: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x))
(see [Appendix B.2](#) for additional information).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = V_{DD}$, $Gx = '0'$ (1x)

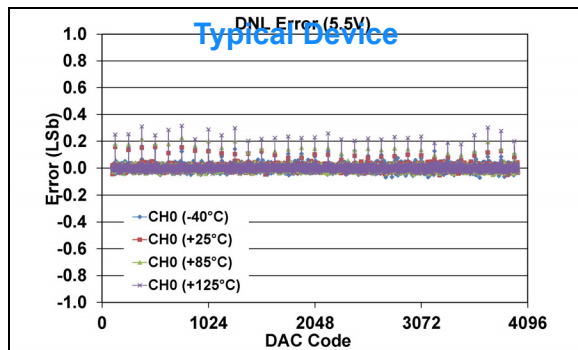


FIGURE 1-80: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

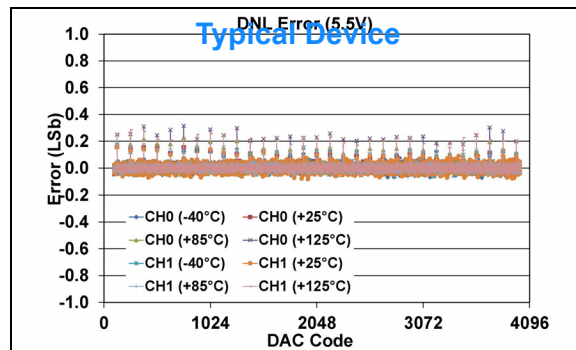


FIGURE 1-83: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

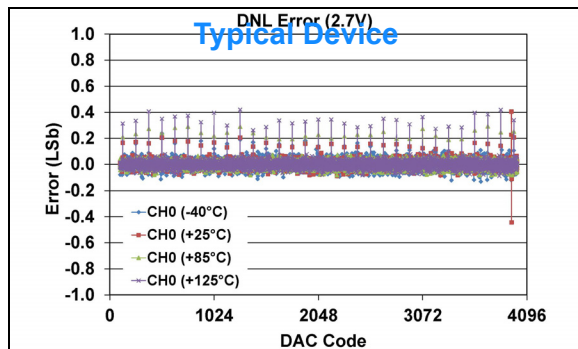


FIGURE 1-81: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

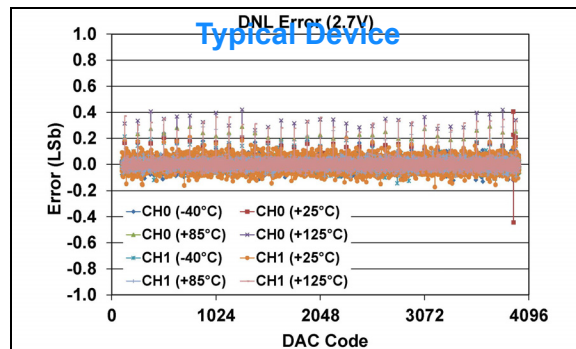


FIGURE 1-84: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

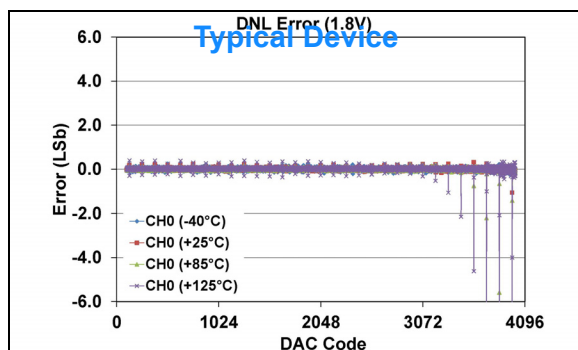


FIGURE 1-82: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x))
(see [Appendix B.2](#) for additional information).

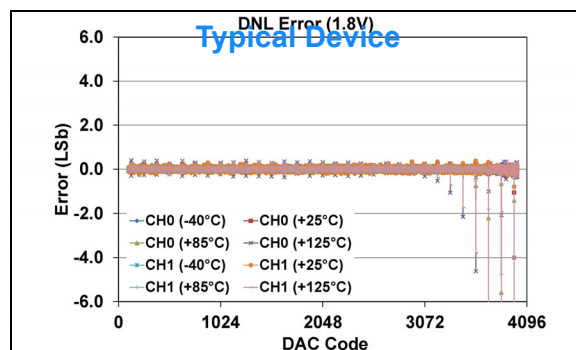


FIGURE 1-85: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x))
(see [Appendix B.2](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 1\text{V}$, $Gx = '0'$ (1x)

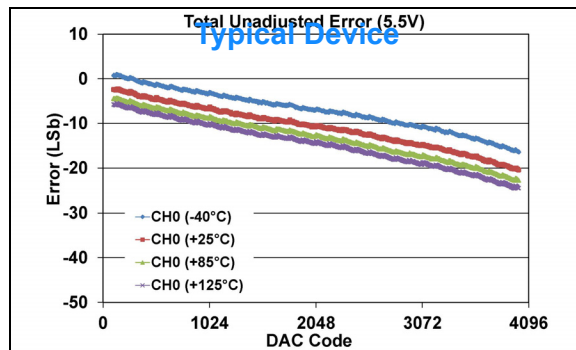


FIGURE 1-86: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB21)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

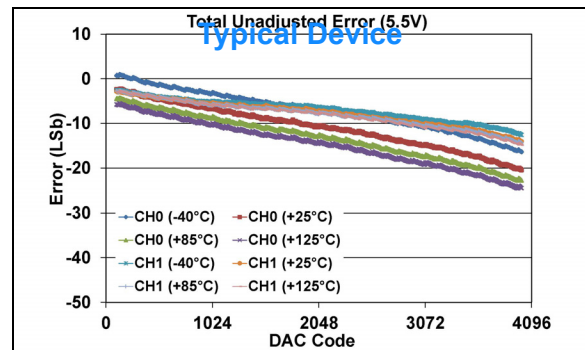


FIGURE 1-89: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB22)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

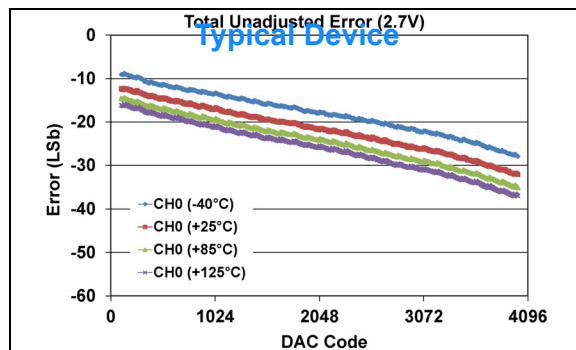


FIGURE 1-87: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB21)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

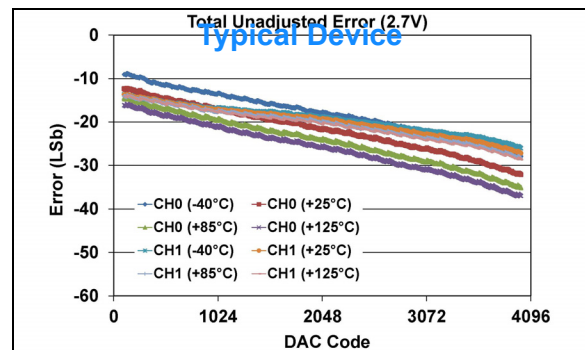


FIGURE 1-90: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB22)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

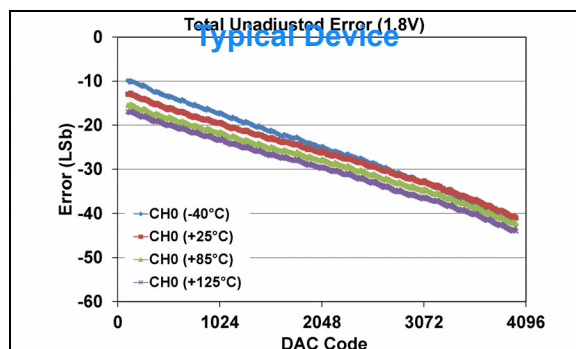


FIGURE 1-88: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB21)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

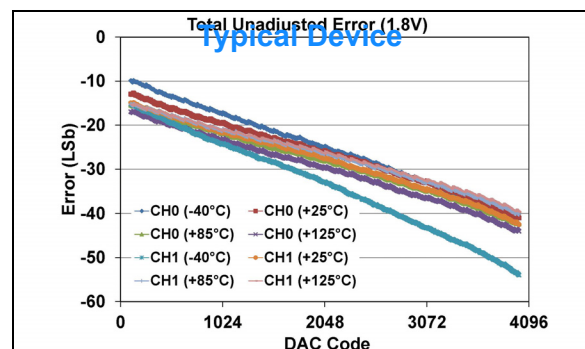


FIGURE 1-91: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB22)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 1\text{V}$, $Gx = '0'$ (1x)

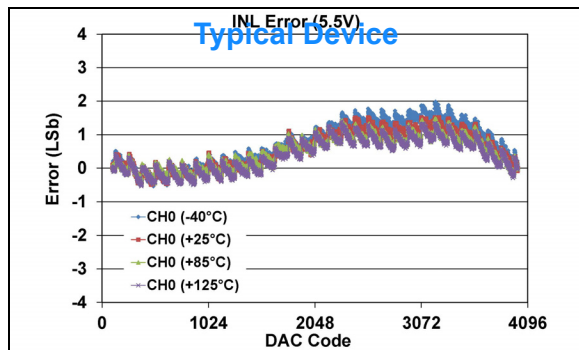


FIGURE 1-92: INL Error vs. DAC Code, and Temperature (Code 100 - 4000)
(Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

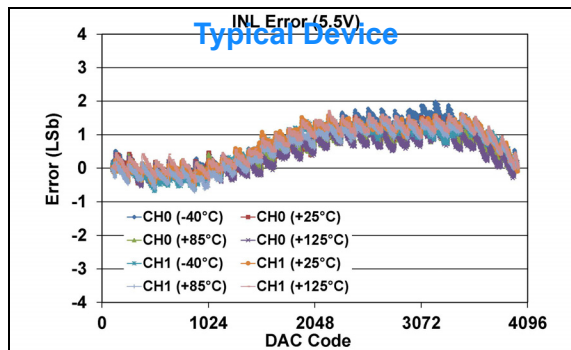


FIGURE 1-95: INL Error vs. DAC Code, and Temperature (Code 100 - 4000)
(Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

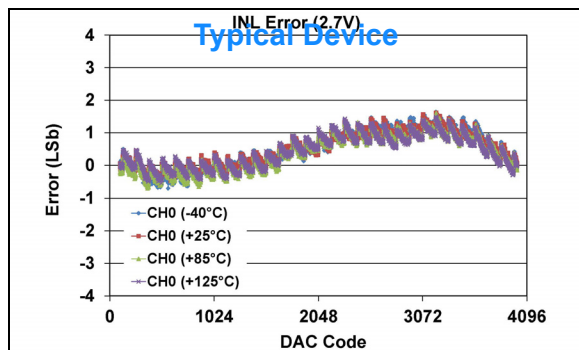


FIGURE 1-93: INL Error vs. DAC Code, and Temperature (Code 100 - 4000)
(Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

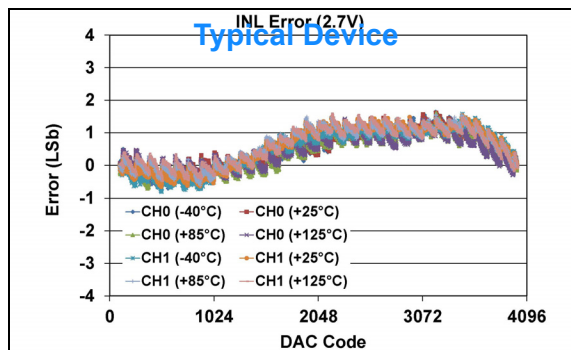


FIGURE 1-96: INL Error vs. DAC Code, and Temperature (Code 100 - 4000)
(Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

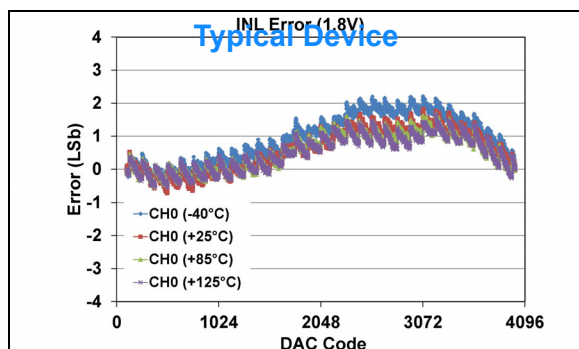


FIGURE 1-94: INL Error vs. DAC Code, and Temperature (Code 100 - 4000)
(Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

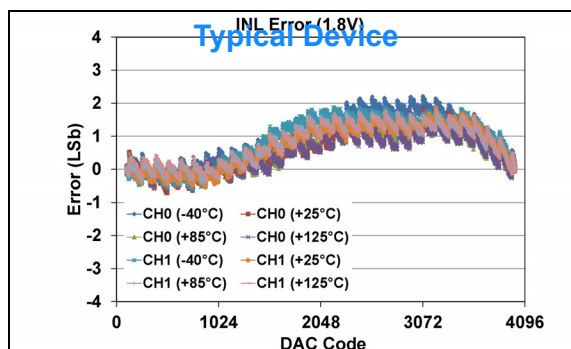


FIGURE 1-97: INL Error vs. DAC Code, and Temperature (Code 100 - 4000)
(Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 1\text{V}$, $Gx = '0'$ (1x)

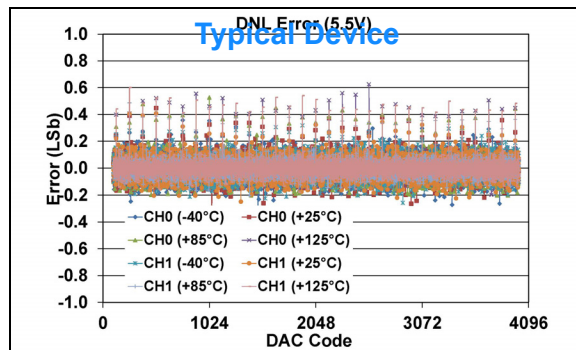


FIGURE 1-98: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - MCP47FXB21)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

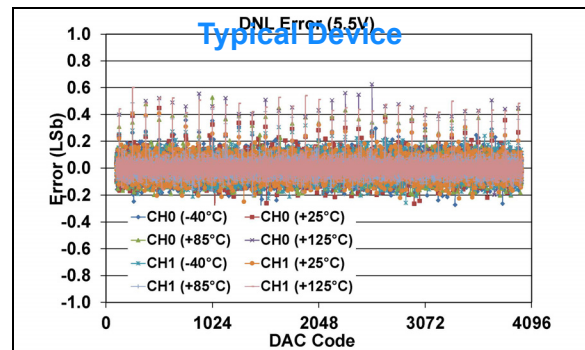


FIGURE 1-101: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - MCP47FXB22)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

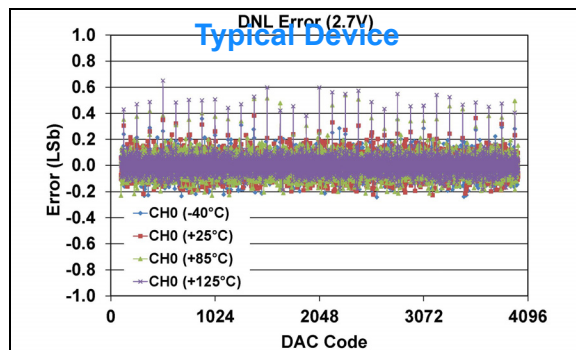


FIGURE 1-99: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - MCP47FXB21)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

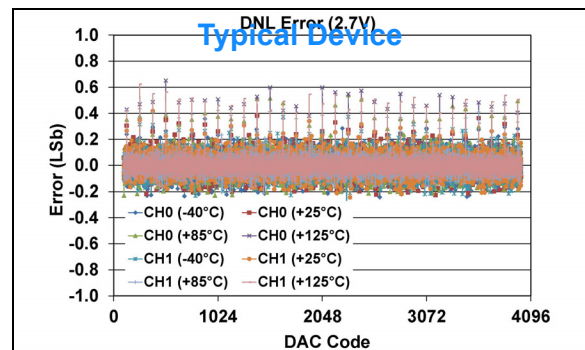


FIGURE 1-102: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - MCP47FXB22)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

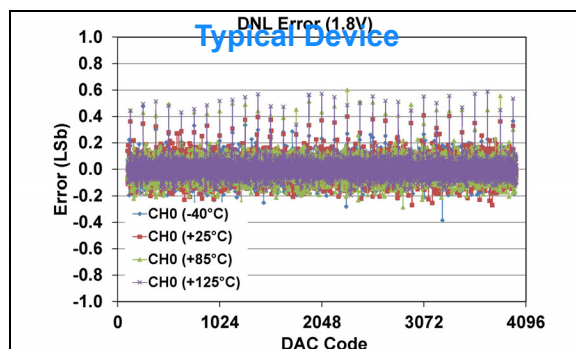


FIGURE 1-100: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - MCP47FXB21)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

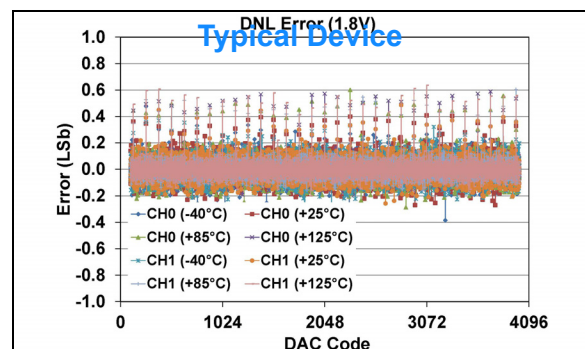


FIGURE 1-103: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - MCP47FXB22)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 1\text{V}$, $Gx = '1'$ (2x)

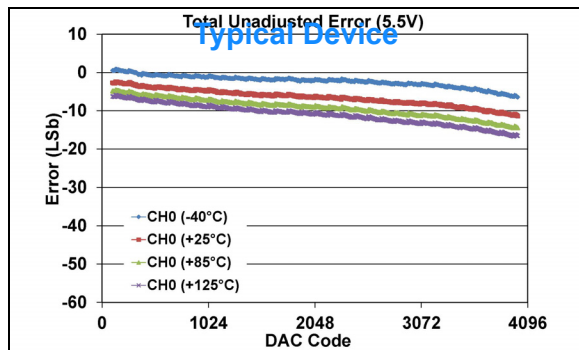


FIGURE 1-104: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

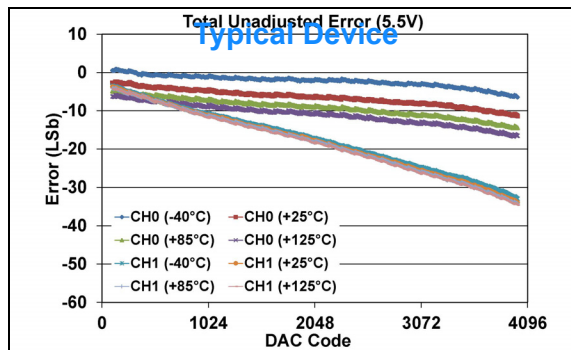


FIGURE 1-107: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

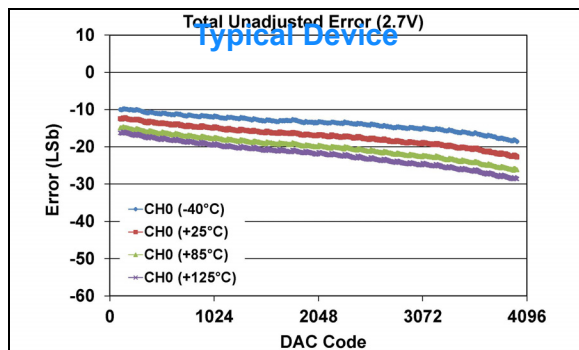


FIGURE 1-105: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

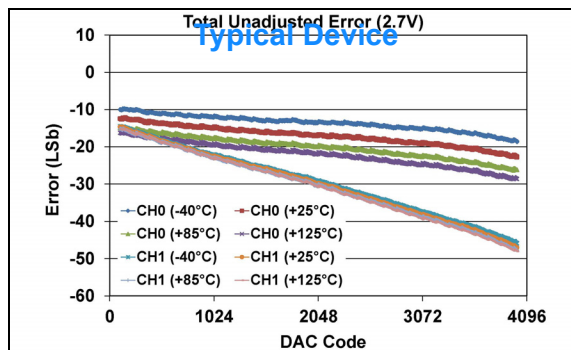


FIGURE 1-108: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

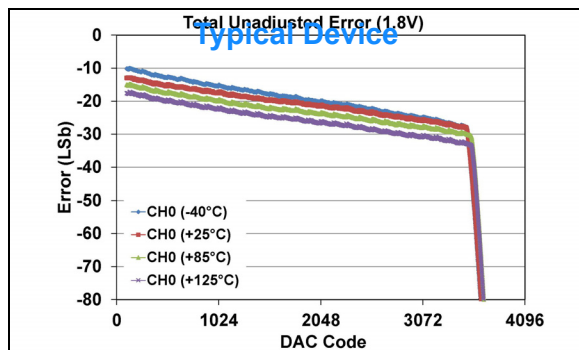


FIGURE 1-106: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x))
(see [Appendix B.3](#) for additional information).

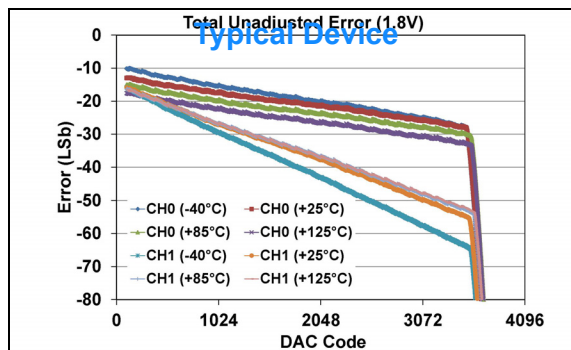


FIGURE 1-109: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x))
(see [Appendix B.3](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 1\text{V}$, $Gx = '1'$ (2x)

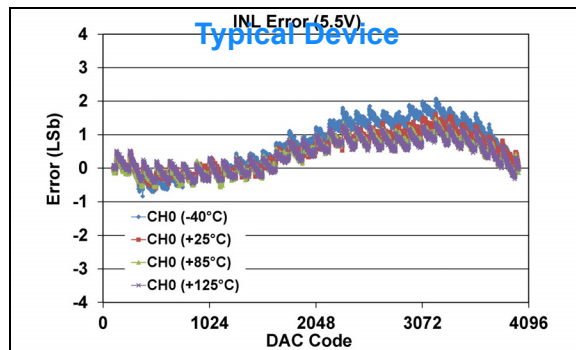


FIGURE 1-110: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - MCP47FXB21)
(12-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

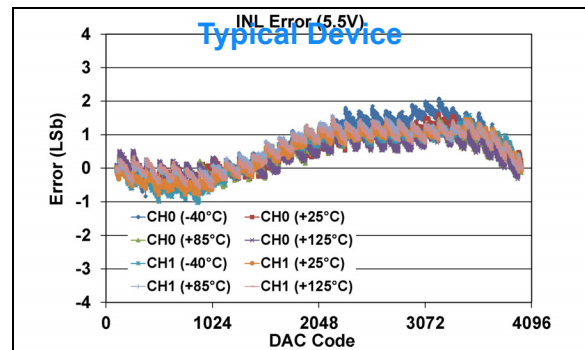


FIGURE 1-113: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - MCP47FXB22)
(12-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

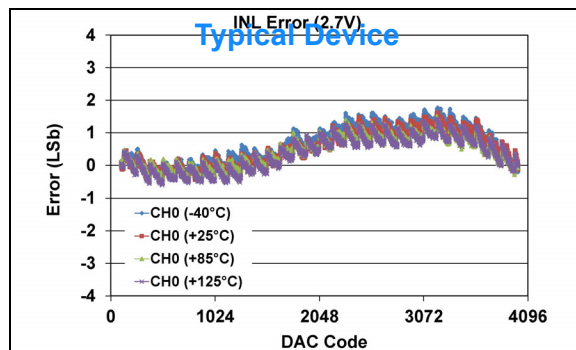


FIGURE 1-111: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - MCP47FXB21)
(12-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

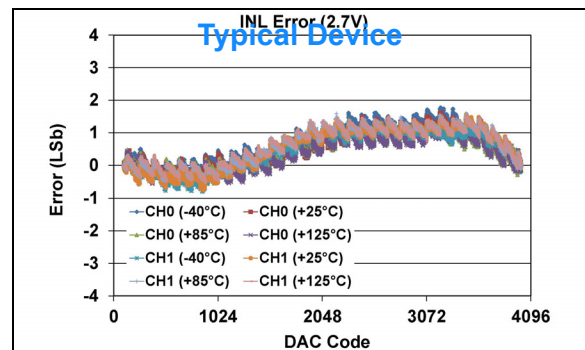


FIGURE 1-114: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - MCP47FXB22)
(12-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

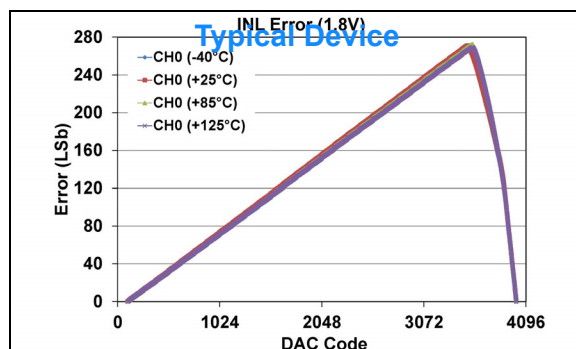


FIGURE 1-112: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - MCP47FXB21)
(12-bit: $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x))
(see [Appendix B.3](#) for additional information).

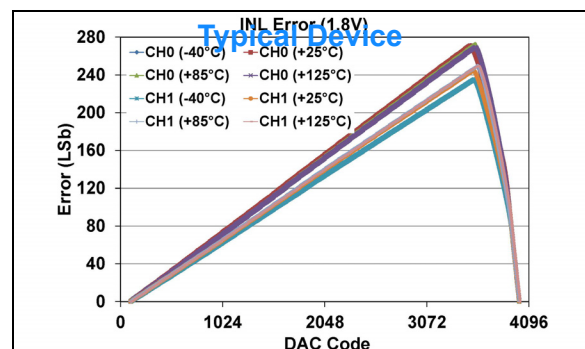


FIGURE 1-115: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - MCP47FXB22)
(12-bit: $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x))
(see [Appendix B.3](#) for additional information).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 1\text{V}$, $Gx = '1'$ (2x)

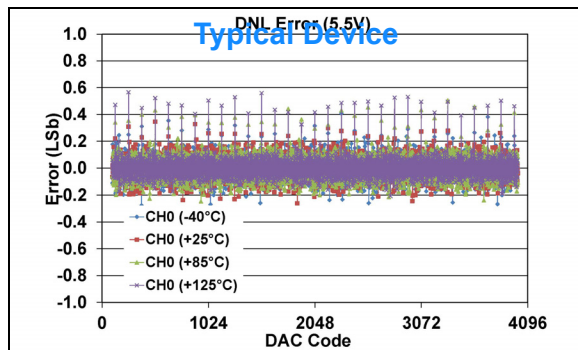


FIGURE 1-116: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

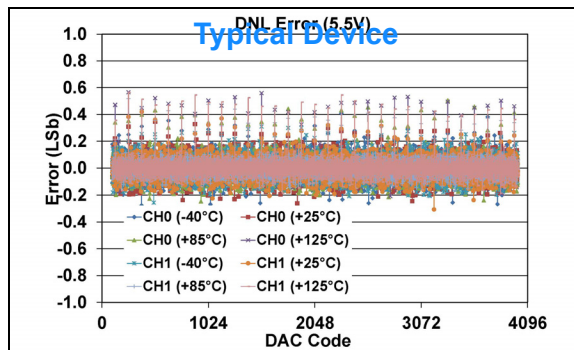


FIGURE 1-119: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

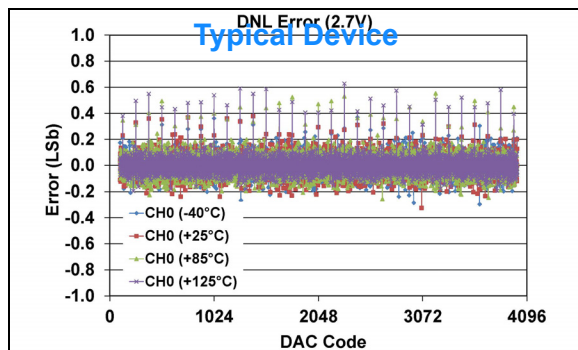


FIGURE 1-117: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

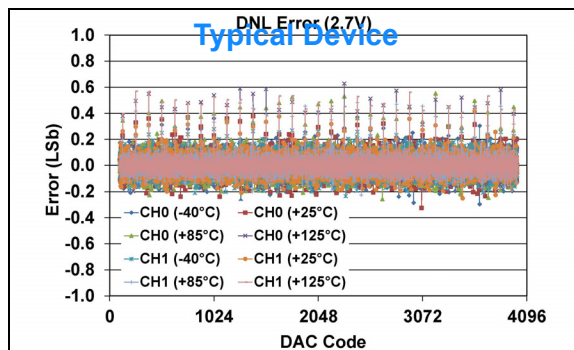


FIGURE 1-120: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

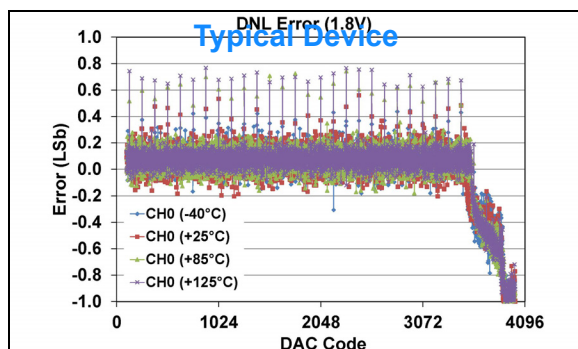


FIGURE 1-118: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x))
(see [Appendix B.3](#) for additional information).

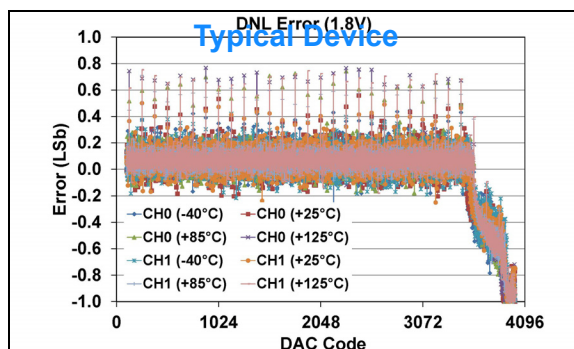


FIGURE 1-121: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x))
(see [Appendix B.3](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 2.048\text{V}$

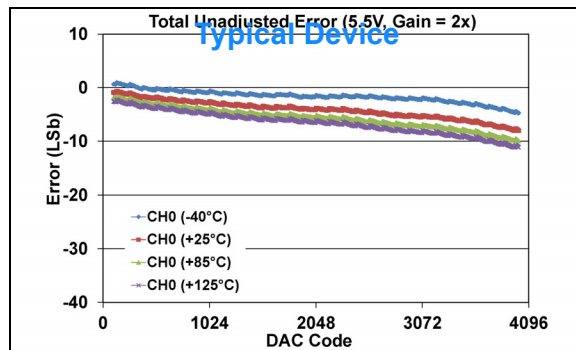


FIGURE 1-122: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB21)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

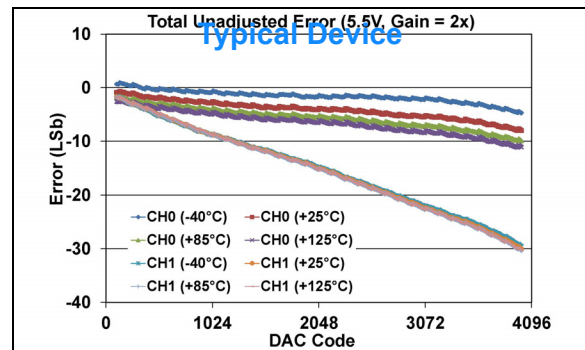


FIGURE 1-125: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB22)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

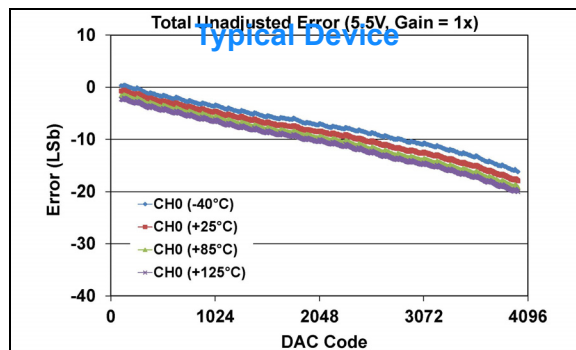


FIGURE 1-123: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB21)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

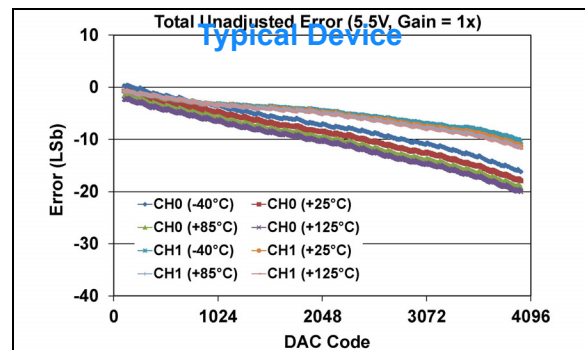


FIGURE 1-126: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB22)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

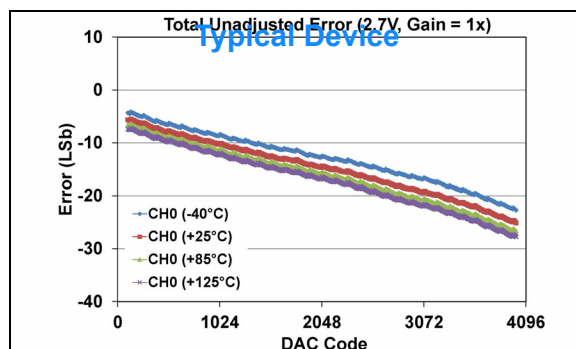


FIGURE 1-124: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB21)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

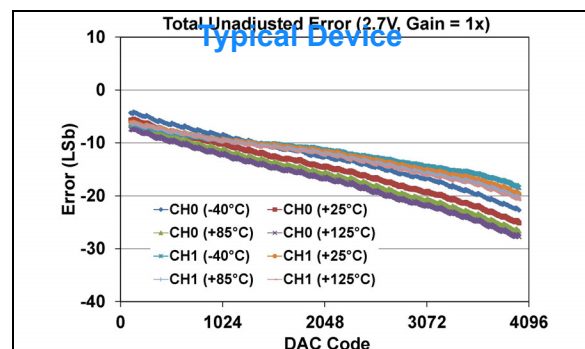


FIGURE 1-127: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB22)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 2.048\text{V}$

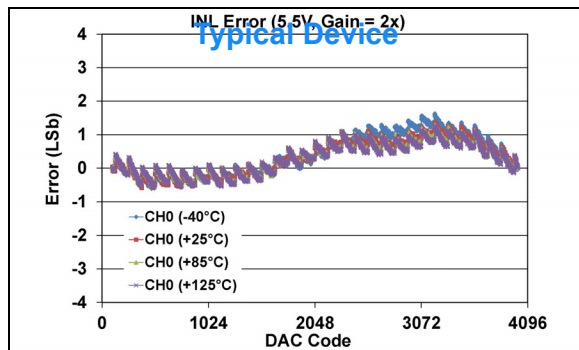


FIGURE 1-128: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - MCP47FXB21)
(12-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

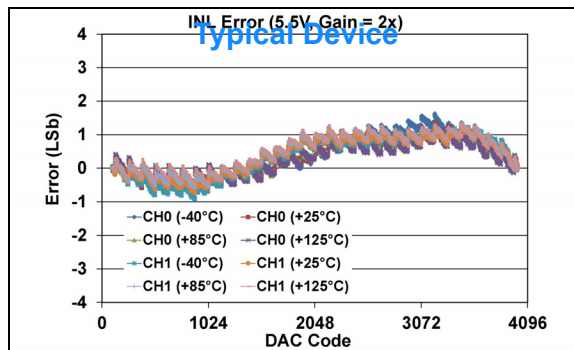


FIGURE 1-131: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - MCP47FXB22)
(12-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

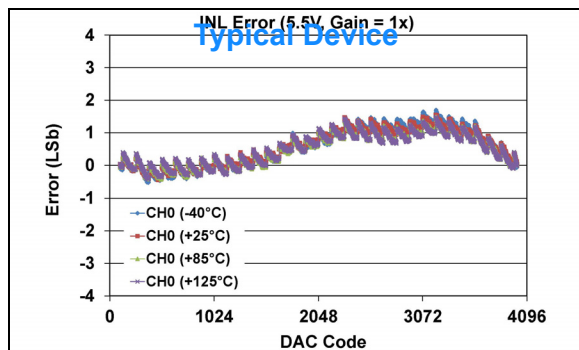


FIGURE 1-129: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - MCP47FXB21)
(12-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

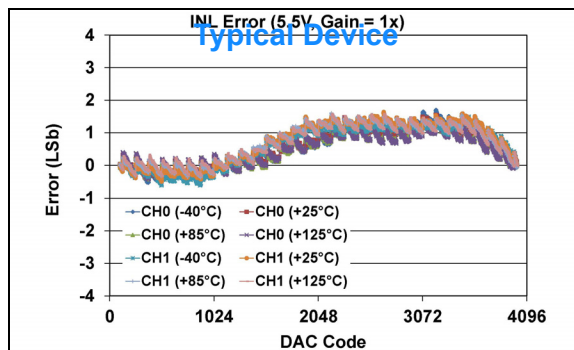


FIGURE 1-132: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - MCP47FXB22)
(12-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

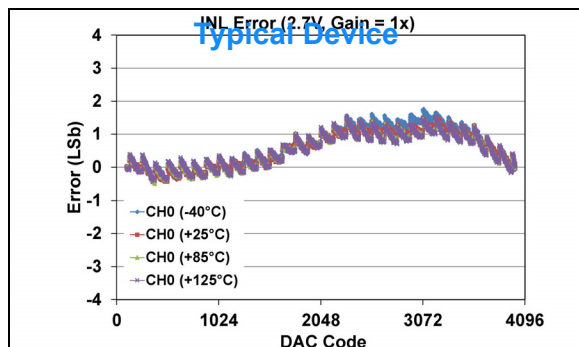


FIGURE 1-130: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - MCP47FXB21)
(12-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

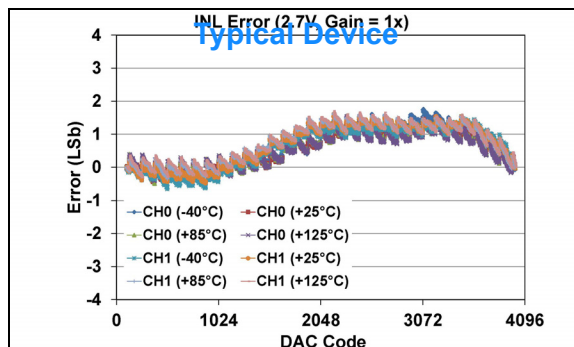


FIGURE 1-133: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - MCP47FXB22)
(12-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 2.048\text{V}$

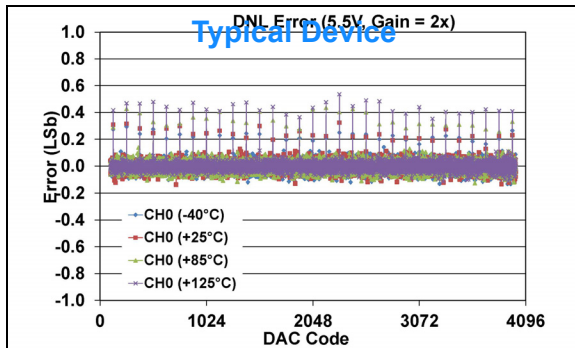


FIGURE 1-134: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - MCP47FXB21)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

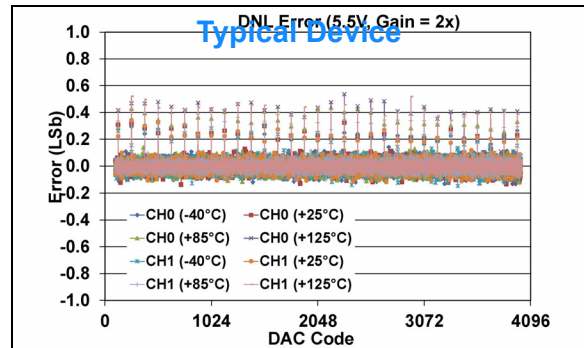


FIGURE 1-137: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - MCP47FXB22)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

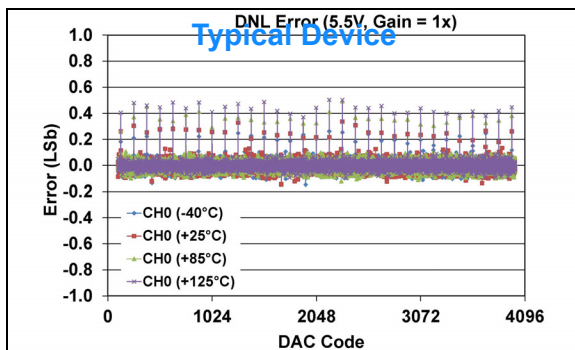


FIGURE 1-135: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - MCP47FXB21)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

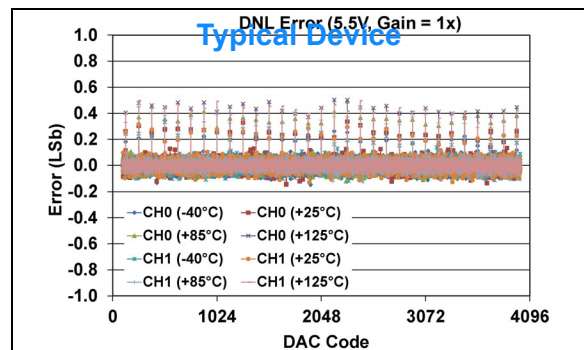


FIGURE 1-138: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - MCP47FXB22)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

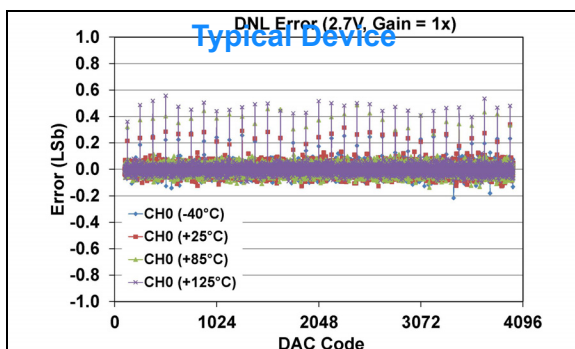


FIGURE 1-136: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - MCP47FXB21)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

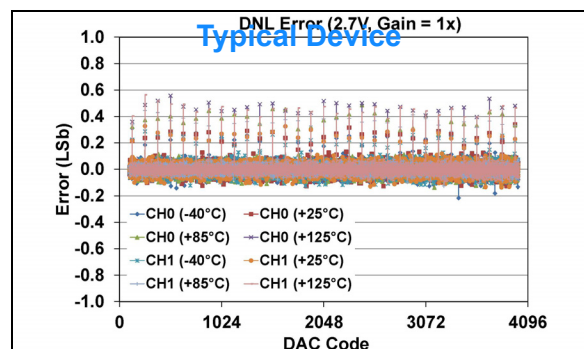


FIGURE 1-139: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - MCP47FXB22)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = V_{DD}$, $Gx = '0'$ (1x)

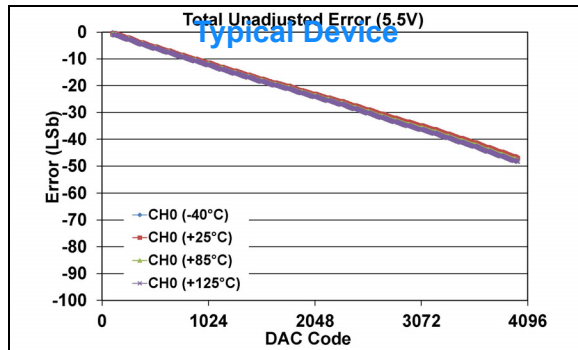


FIGURE 1-140: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

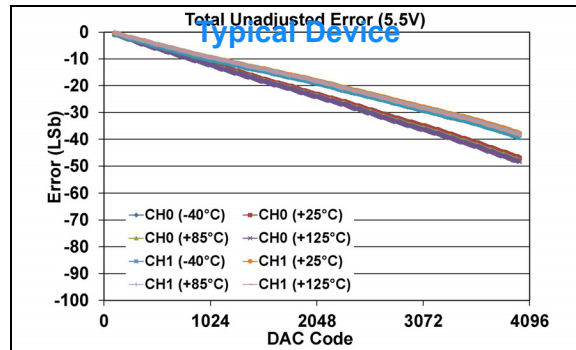


FIGURE 1-143: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

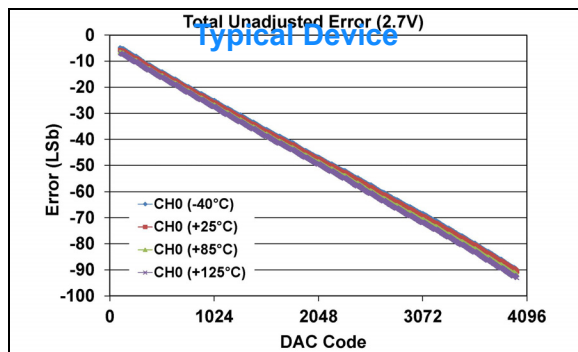


FIGURE 1-141: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

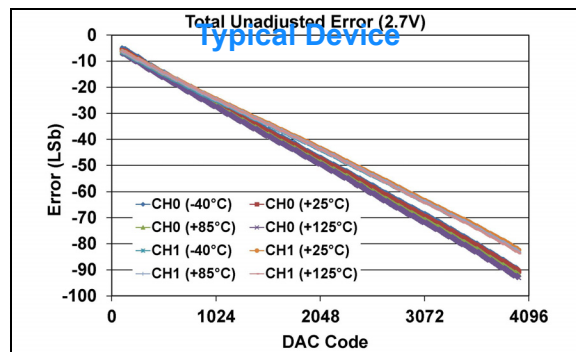


FIGURE 1-144: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

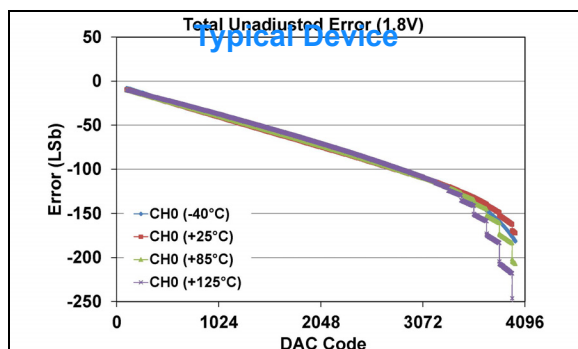


FIGURE 1-142: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x))
(see [Appendix B.4](#) for additional information).

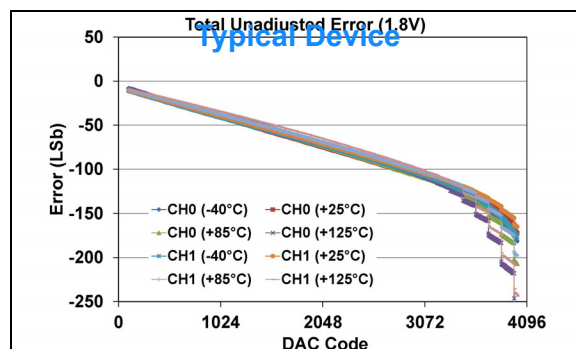


FIGURE 1-145: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x))
(see [Appendix B.4](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = V_{DD}$, $Gx = '0'$ (1x)

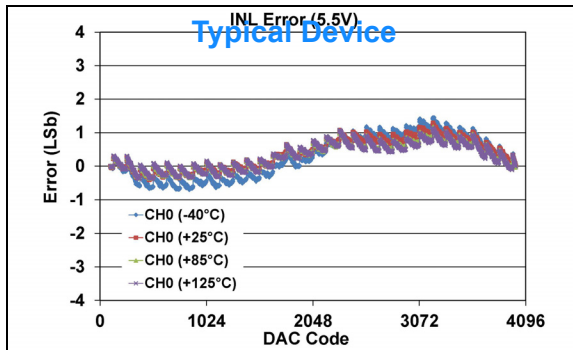


FIGURE 1-146: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

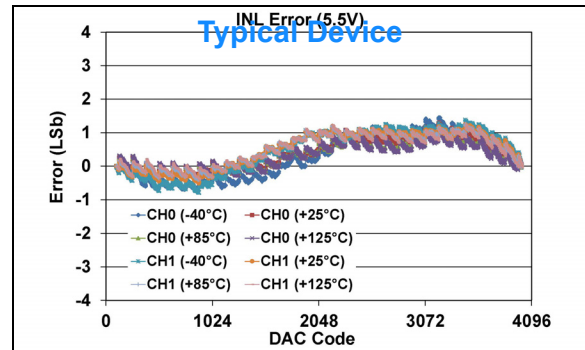


FIGURE 1-149: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

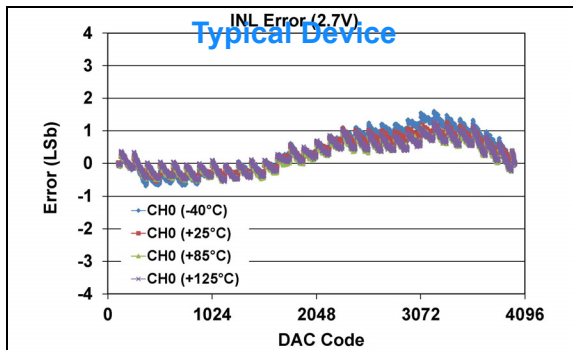


FIGURE 1-147: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

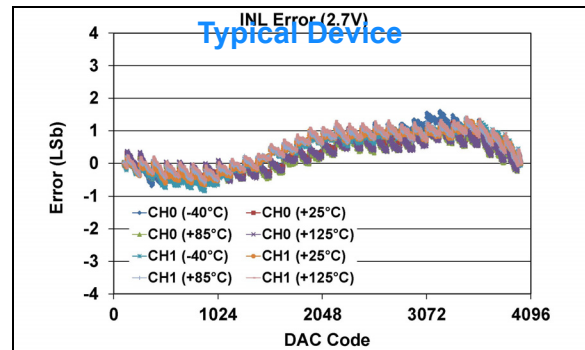


FIGURE 1-150: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

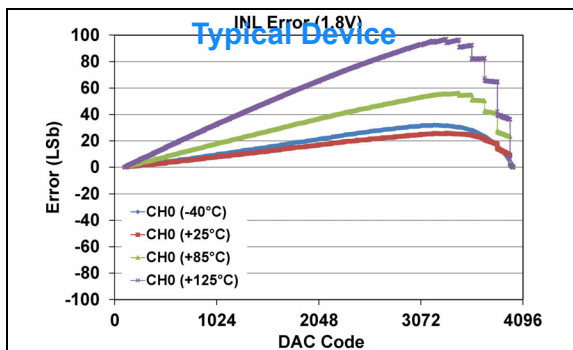


FIGURE 1-148: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x))
(see [Appendix B.4](#) for additional information).

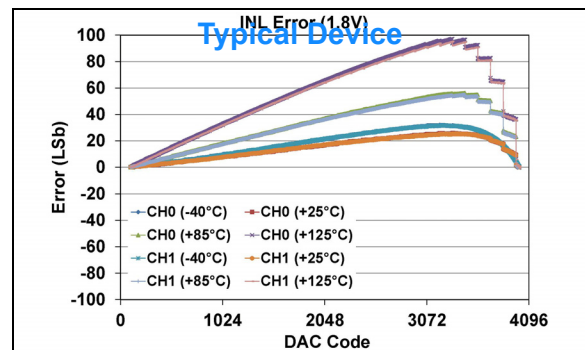


FIGURE 1-151: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x))
(see [Appendix B.4](#) for additional information).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = V_{DD}$, $Gx = '0'$ (1x)

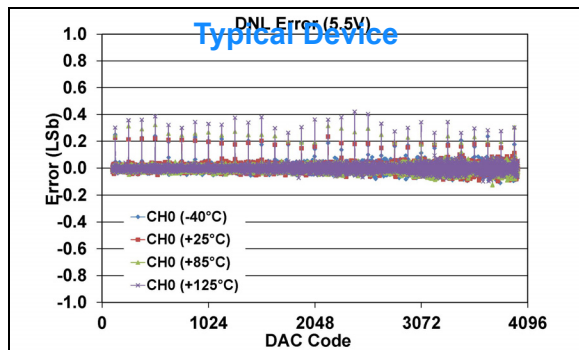


FIGURE 1-152: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

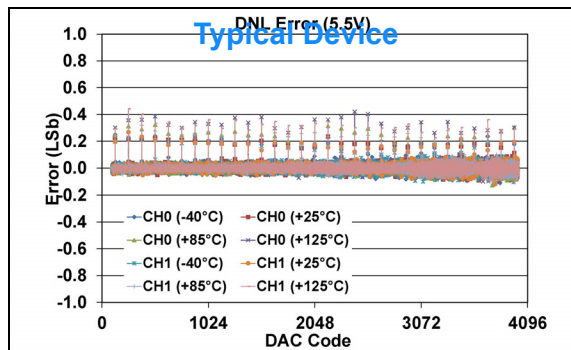


FIGURE 1-155: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

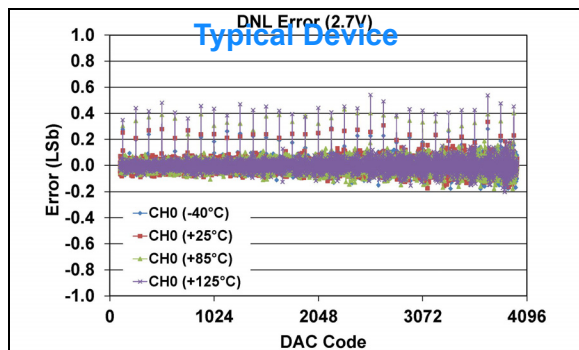


FIGURE 1-153: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

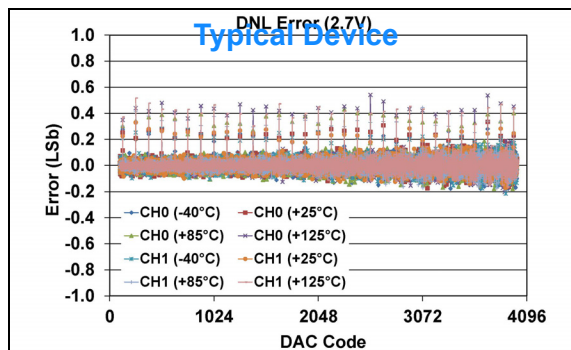


FIGURE 1-156: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

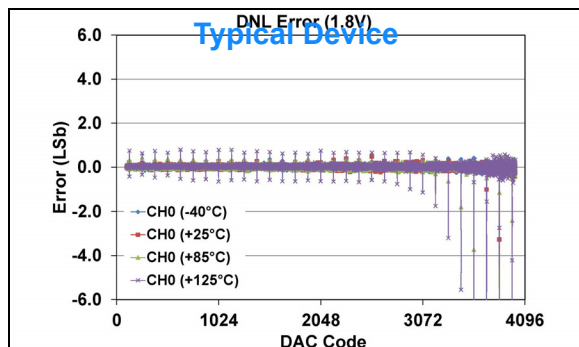


FIGURE 1-154: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x))
(see [Appendix B.4](#) for additional information).

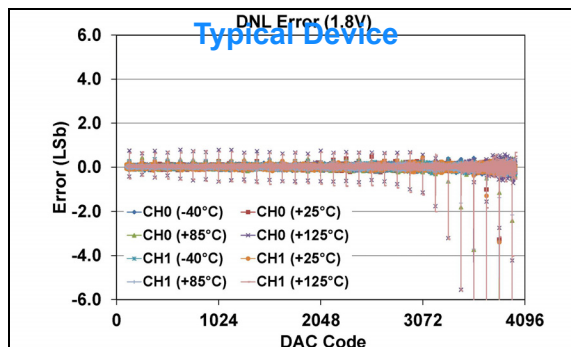


FIGURE 1-157: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x))
(see [Appendix B.4](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 1\text{V}$, $Gx = '0'$ (1x)

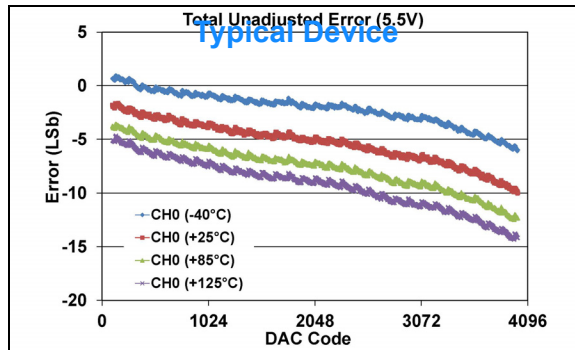


FIGURE 1-158: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB21)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

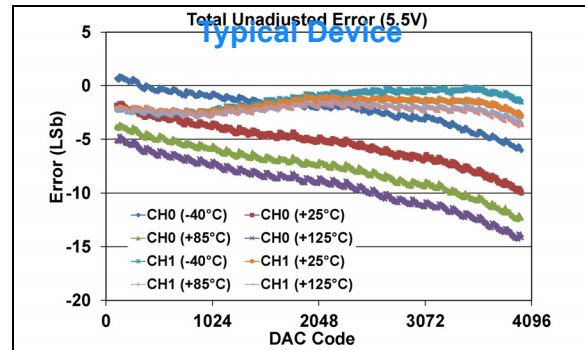


FIGURE 1-161: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB22)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

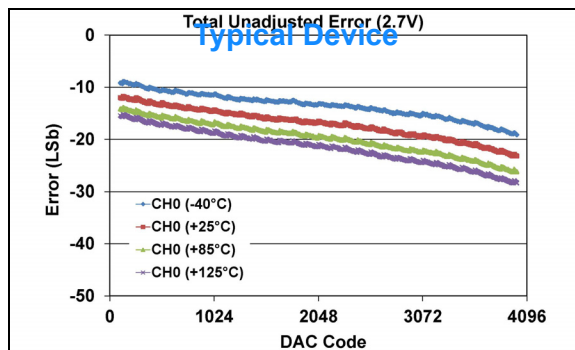


FIGURE 1-159: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB21)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

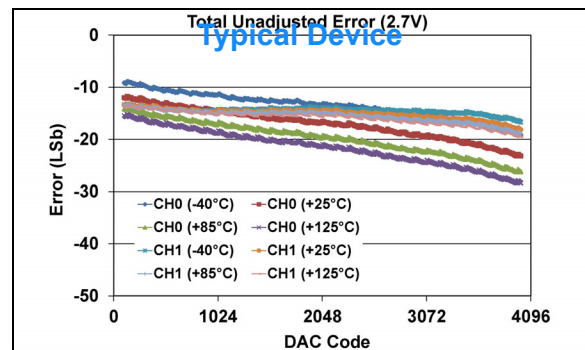


FIGURE 1-162: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB22)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

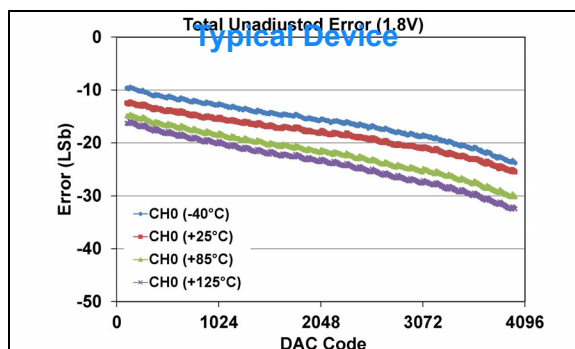


FIGURE 1-160: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB21)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

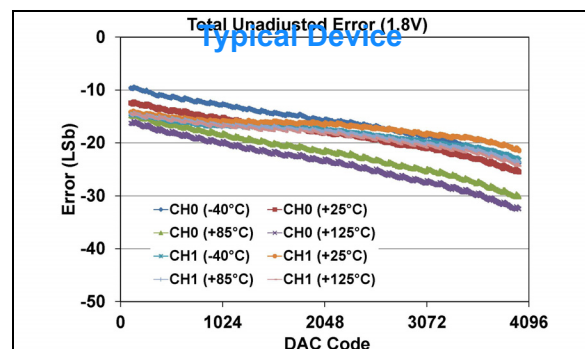


FIGURE 1-163: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB22)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 1\text{V}$, $Gx = '0'$ (1x)

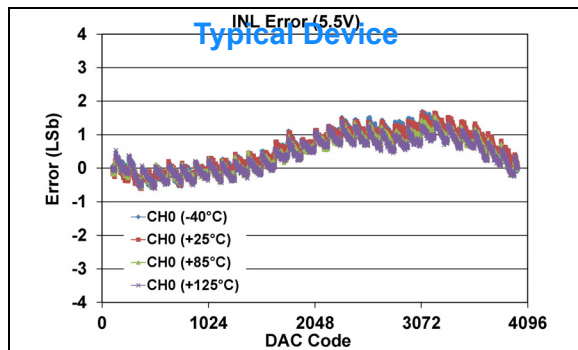


FIGURE 1-164: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

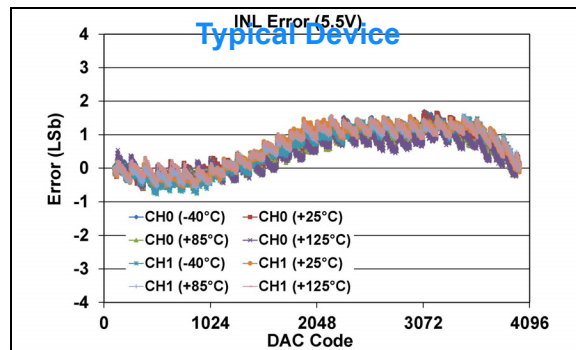


FIGURE 1-167: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

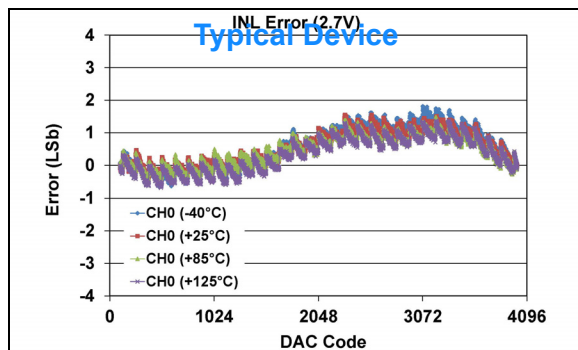


FIGURE 1-165: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

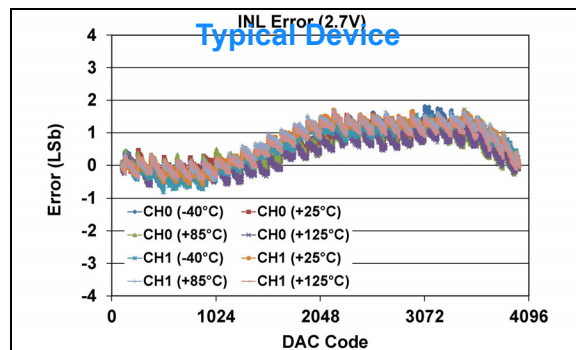


FIGURE 1-168: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

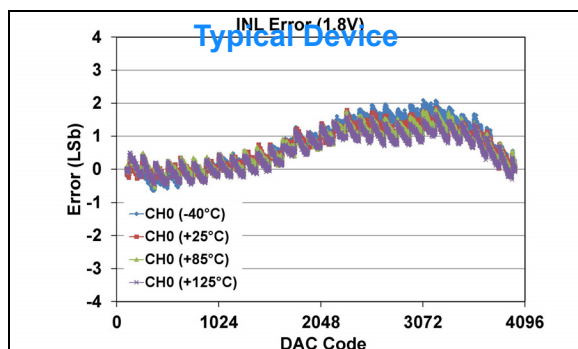


FIGURE 1-166: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

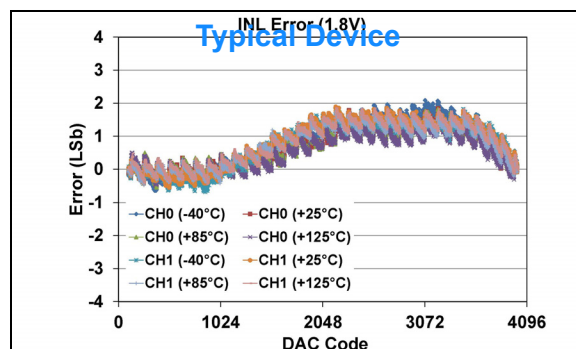


FIGURE 1-169: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 1\text{V}$, $Gx = '0'$ (1x)

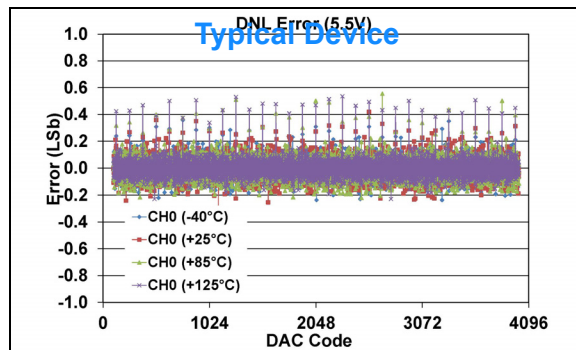


FIGURE 1-170: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - MCP47FXB21)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

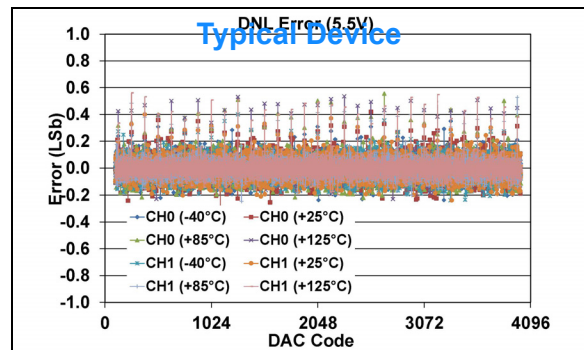


FIGURE 1-173: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - MCP47FXB22)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

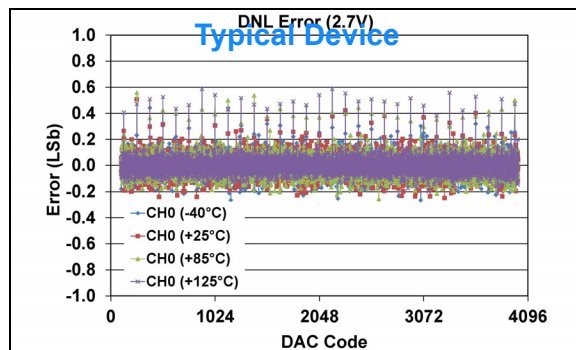


FIGURE 1-171: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - MCP47FXB21)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

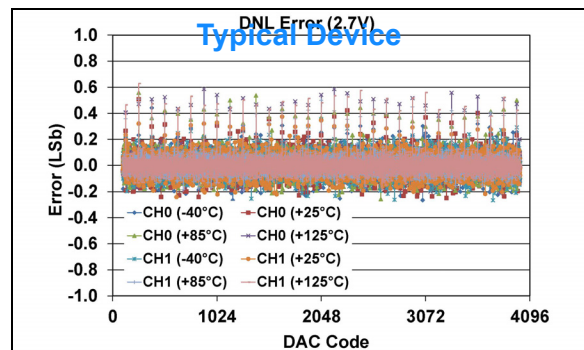


FIGURE 1-174: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - MCP47FXB22)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

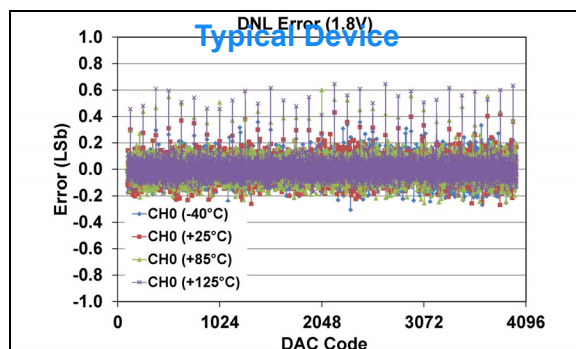


FIGURE 1-172: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - MCP47FXB21)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

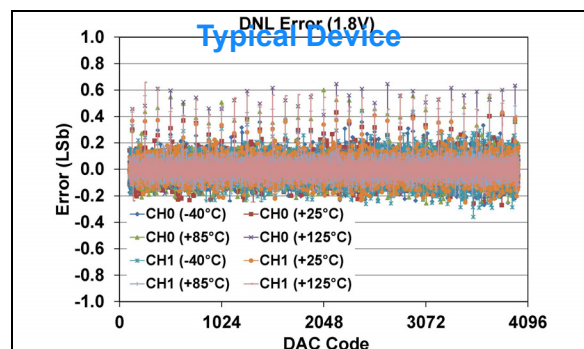


FIGURE 1-175: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - MCP47FXB22)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 1\text{V}$, $Gx = '1'$ (2x)

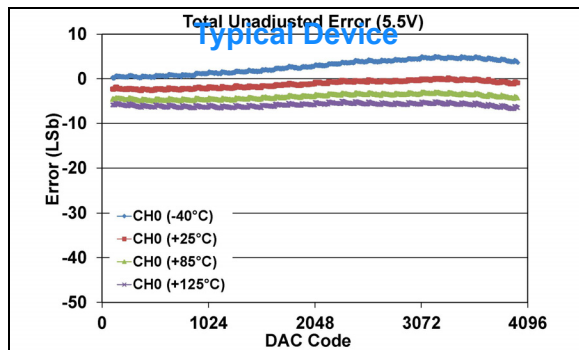


FIGURE 1-176: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

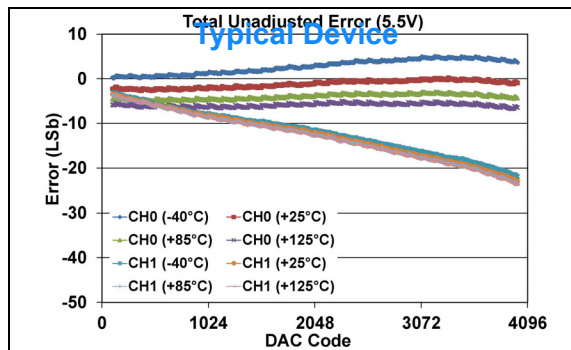


FIGURE 1-179: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

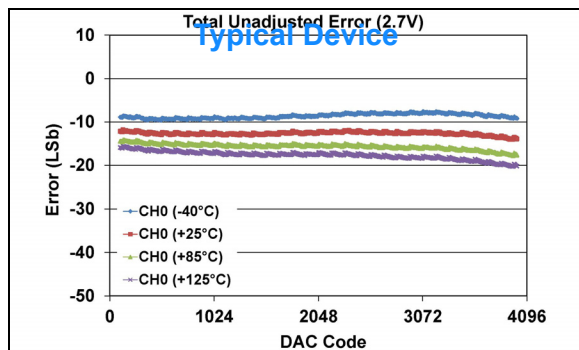


FIGURE 1-177: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

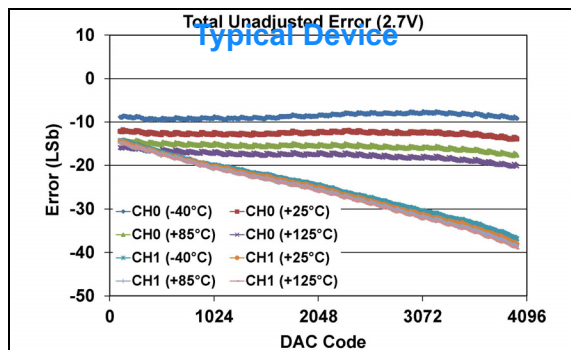


FIGURE 1-180: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

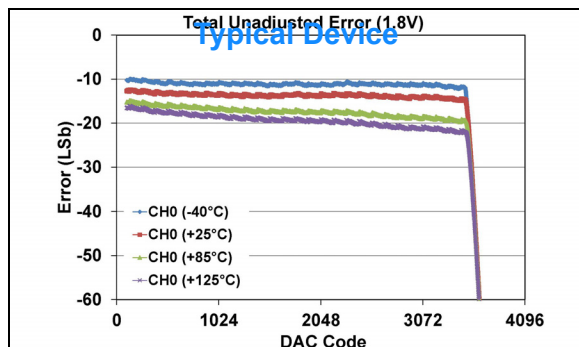


FIGURE 1-178: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x))
(see [Appendix B.5](#) for additional information).

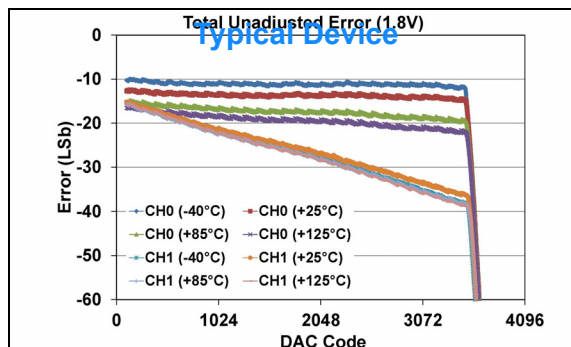


FIGURE 1-181: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x))
(see [Appendix B.5](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 1\text{V}$, $Gx = '1'$ (2x)

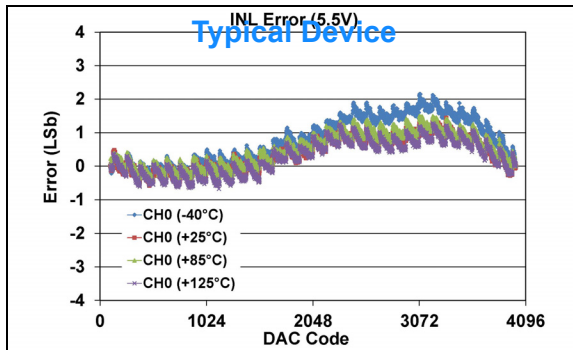


FIGURE 1-182: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - MCP47FXB21)
(12-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

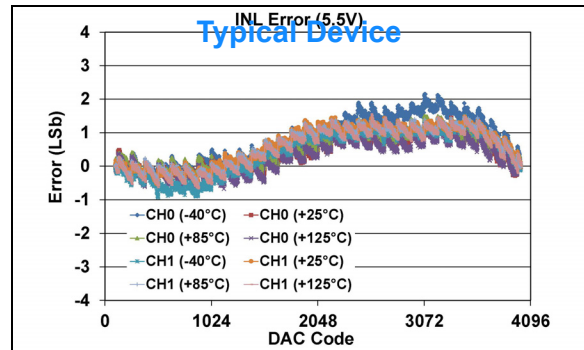


FIGURE 1-185: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - MCP47FXB22)
(12-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

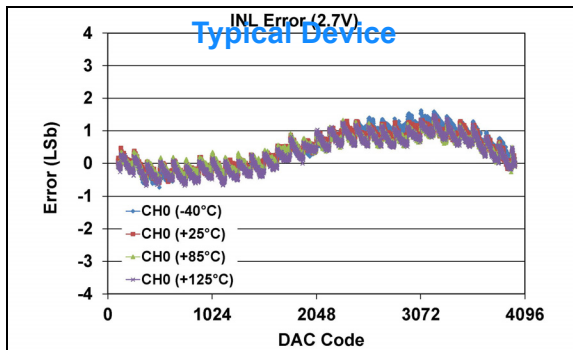


FIGURE 1-183: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - MCP47FXB21)
(12-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

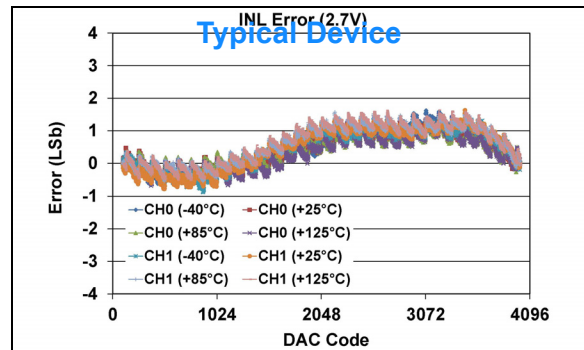


FIGURE 1-186: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - MCP47FXB22)
(12-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

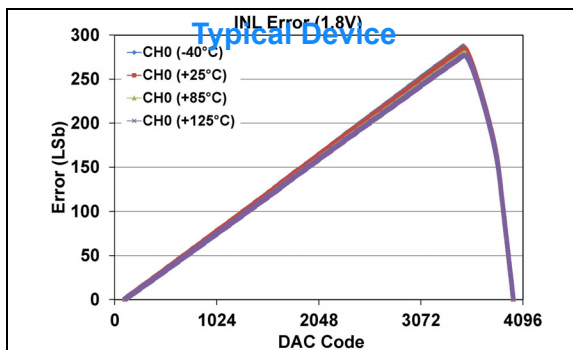


FIGURE 1-184: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - MCP47FXB21)
(12-bit: $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x))
(see [Appendix B.5](#) for additional information).

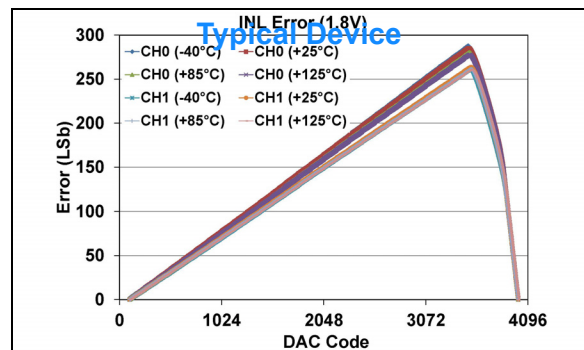


FIGURE 1-187: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - MCP47FXB22)
(12-bit: $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x))
(see [Appendix B.5](#) for additional information).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 1\text{V}$, $Gx = '1'$ (2x)

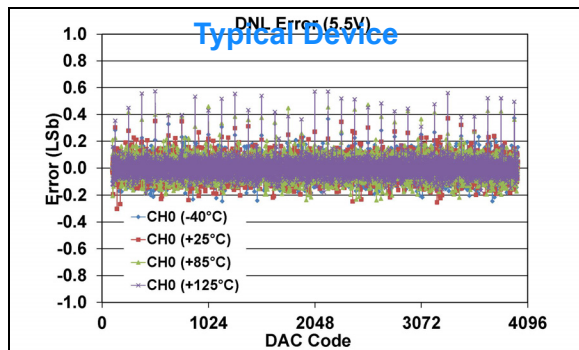


FIGURE 1-188: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

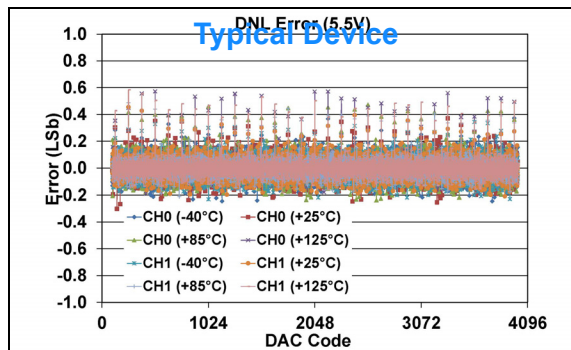


FIGURE 1-191: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

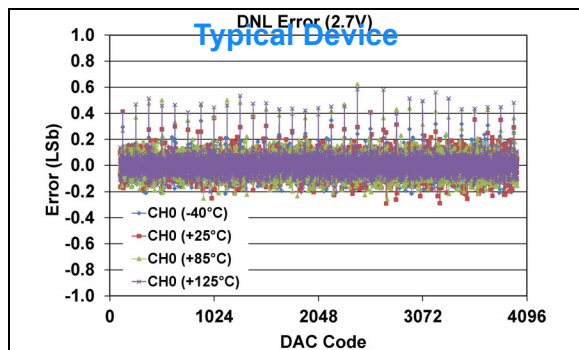


FIGURE 1-189: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

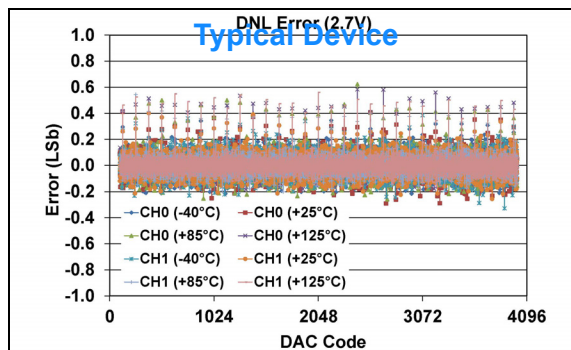


FIGURE 1-192: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

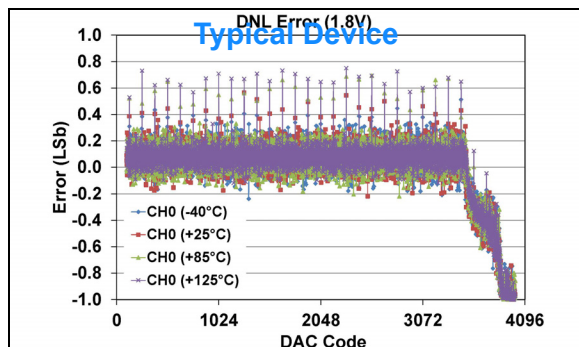


FIGURE 1-190: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x))
(see [Appendix B.5](#) for additional information).

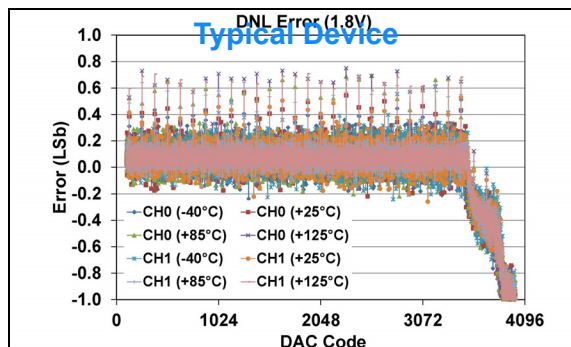


FIGURE 1-193: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x))
(see [Appendix B.5](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 2.048\text{V}$

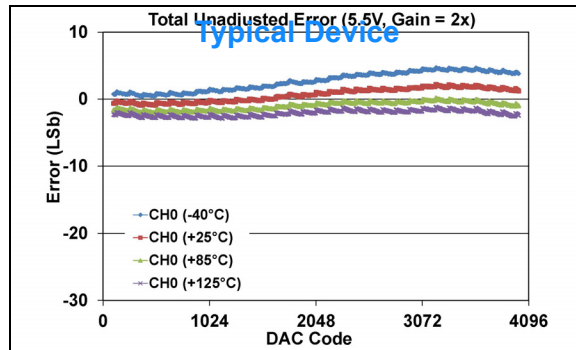


FIGURE 1-194: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB21)
(12-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

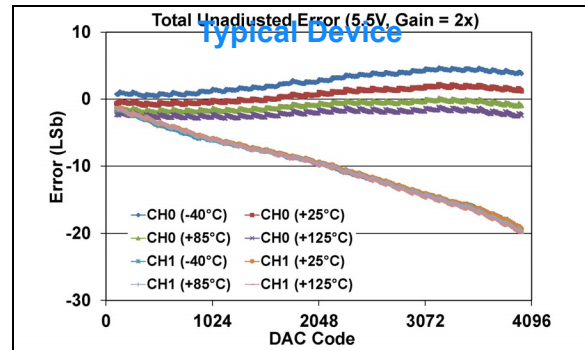


FIGURE 1-197: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB22)
(12-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

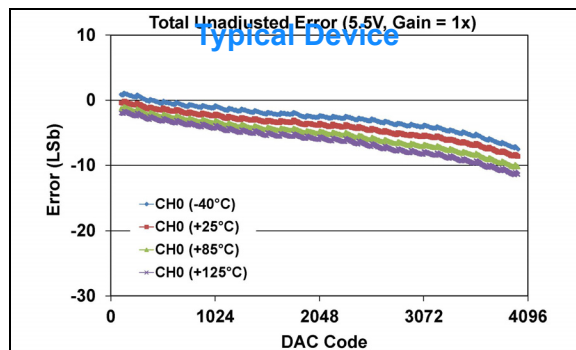


FIGURE 1-195: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB21)
(12-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

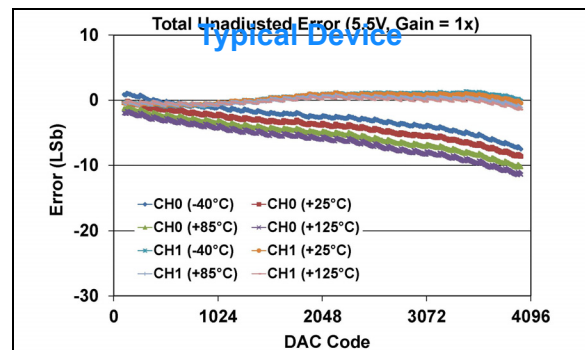


FIGURE 1-198: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB22)
(12-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

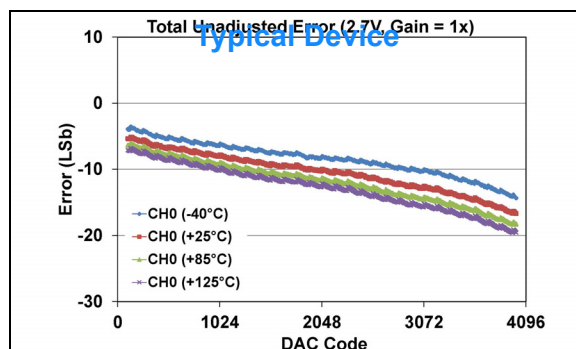


FIGURE 1-196: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB21)
(12-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

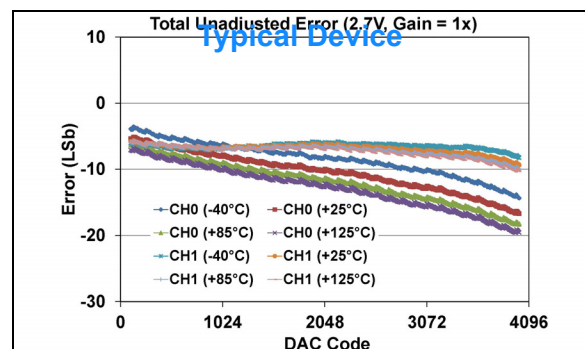


FIGURE 1-199: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB22)
(12-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 2.048\text{V}$

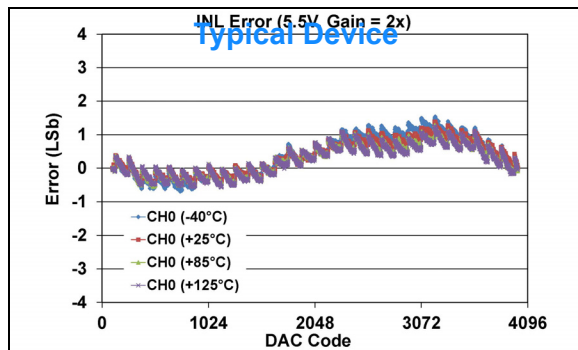


FIGURE 1-200: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

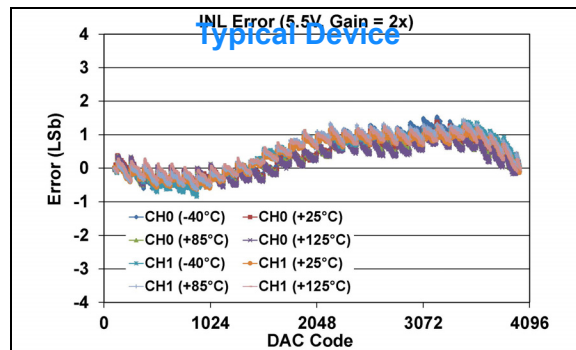


FIGURE 1-203: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

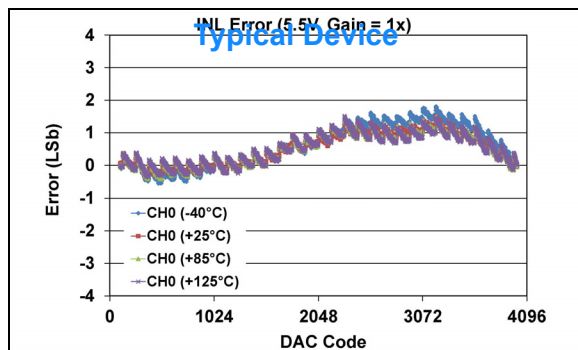


FIGURE 1-201: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

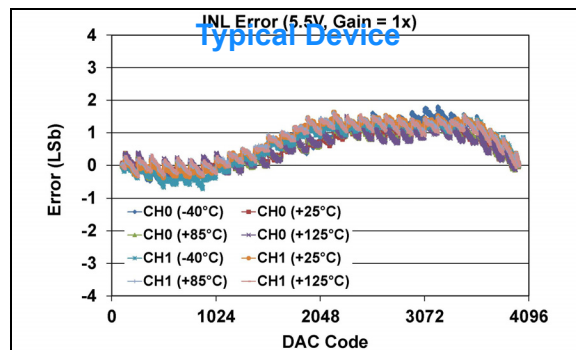


FIGURE 1-204: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

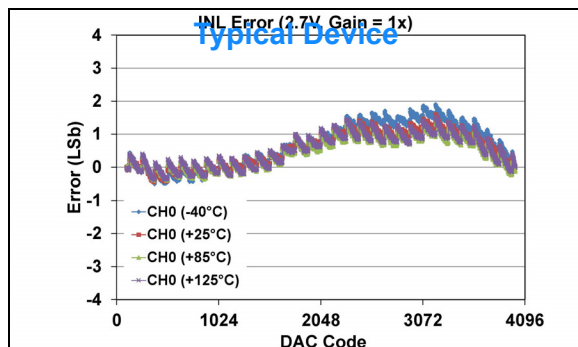


FIGURE 1-202: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

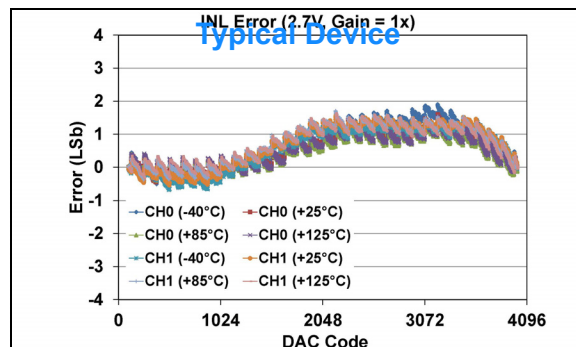


FIGURE 1-205: INL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

12-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 2.048\text{V}$

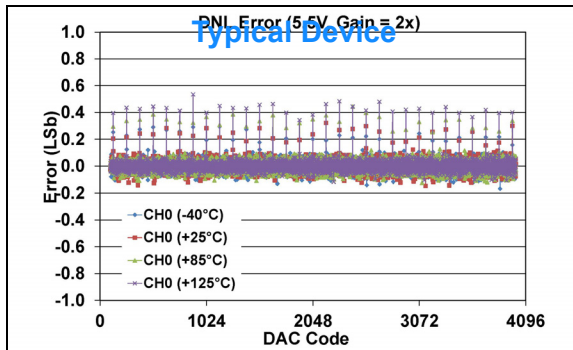


FIGURE 1-206: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

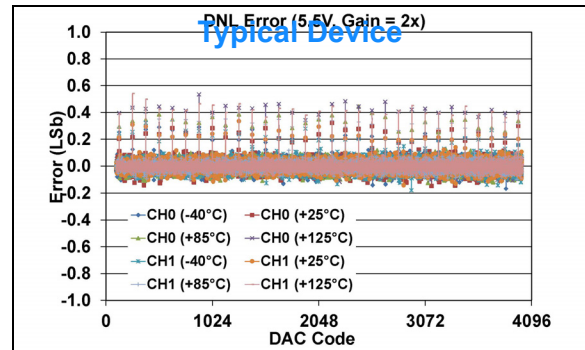


FIGURE 1-209: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

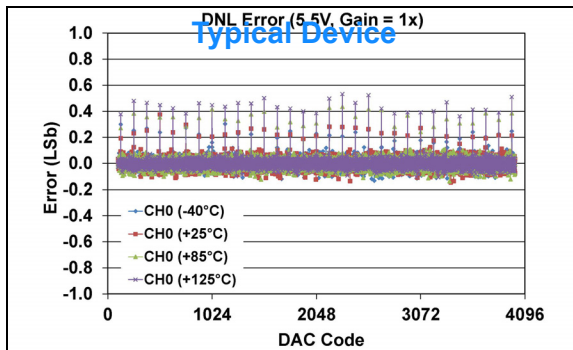


FIGURE 1-207: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

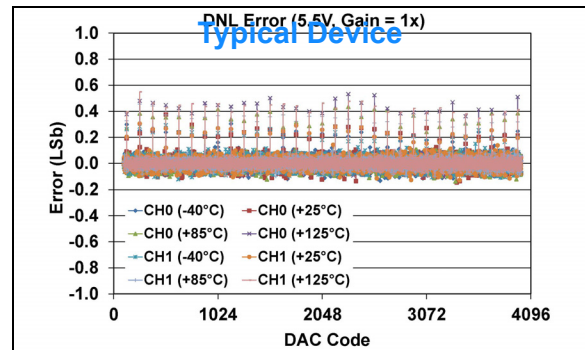


FIGURE 1-210: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

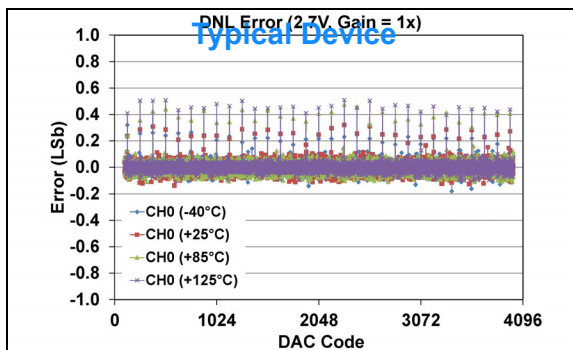


FIGURE 1-208: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Single Channel - **MCP47FXB21**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

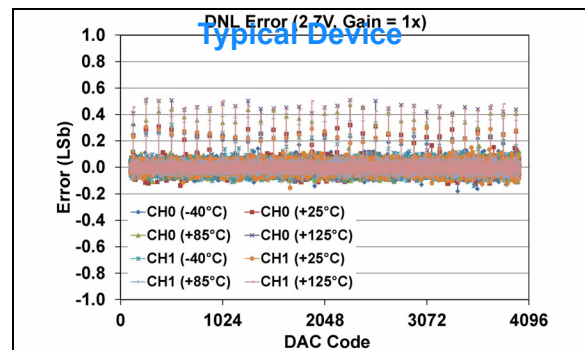


FIGURE 1-211: DNL Error vs. DAC Code, and Temperature (Code 100 - 4000) (Dual Channel - **MCP47FXB22**)
(**12-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '00'$ (V_{DD} Mode), $Gx = '0'$ (1x)

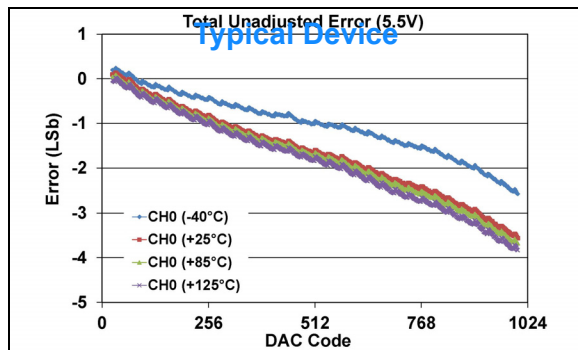


FIGURE 1-212: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB11**)
(10-bit: $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

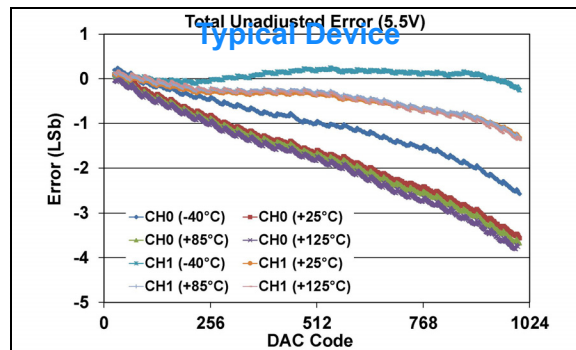


FIGURE 1-215: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB12**)
(10-bit: $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

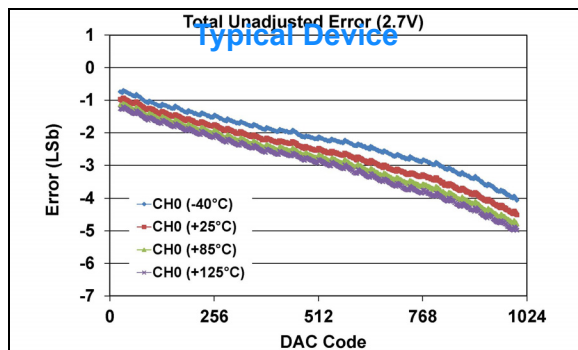


FIGURE 1-213: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB11**)
(10-bit: $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

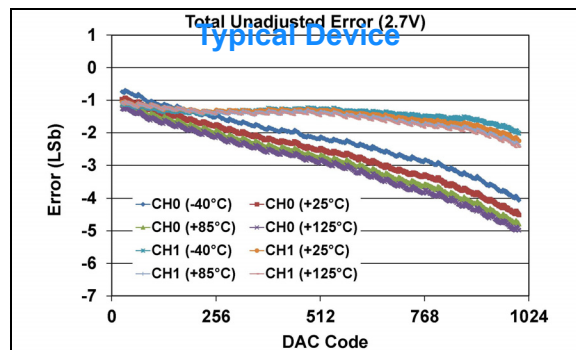


FIGURE 1-216: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB12**)
(10-bit: $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

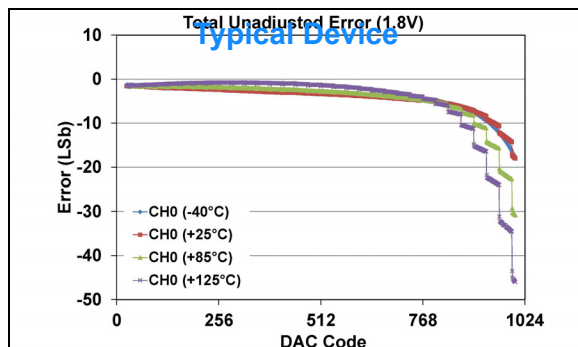


FIGURE 1-214: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB11**)
(10-bit: $V_{DD} = 1.8\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x))
(see [Appendix B.1](#) for additional information).

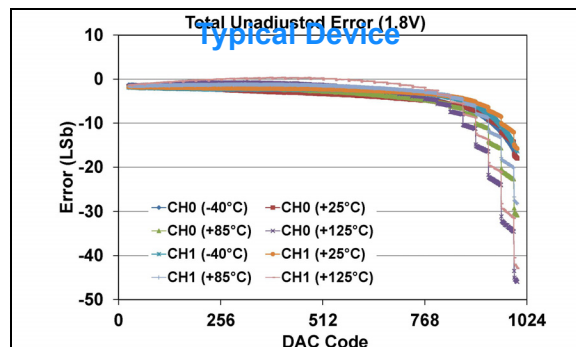


FIGURE 1-217: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB12**)
(10-bit: $V_{DD} = 1.8\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x))
(see [Appendix B.1](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '00'$ (V_{DD} Mode), $Gx = '0'$ (1x)

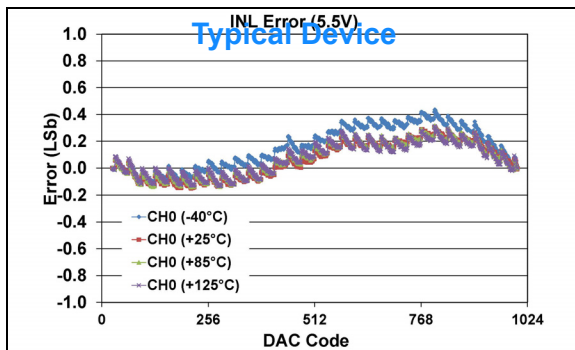


FIGURE 1-218: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

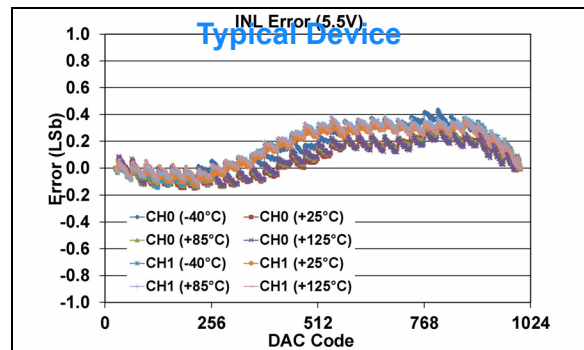


FIGURE 1-221: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

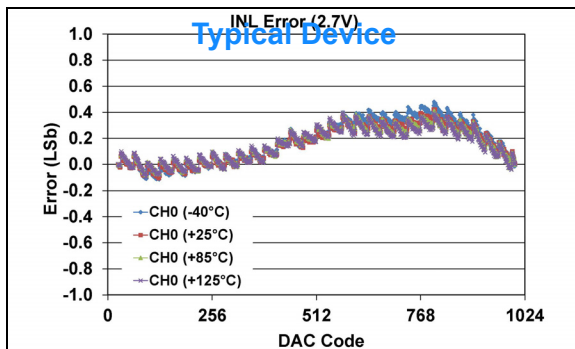


FIGURE 1-219: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

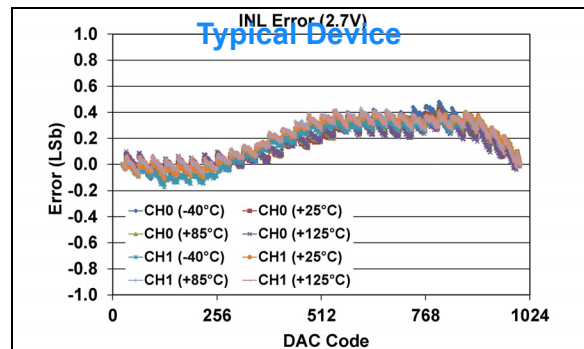


FIGURE 1-222: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

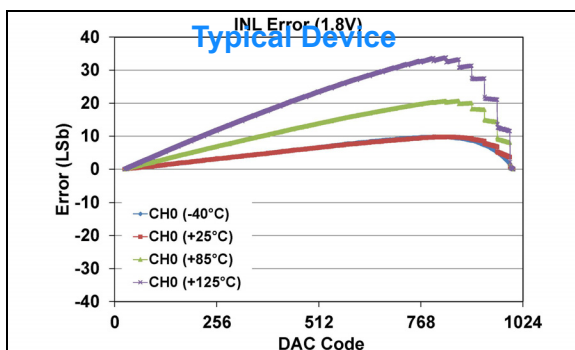


FIGURE 1-220: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x))
(see [Appendix B.1](#) for additional information).

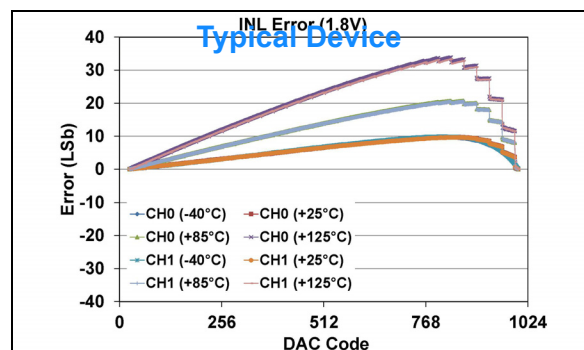


FIGURE 1-223: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x))
(see [Appendix B.1](#) for additional information).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '00'$ (V_{DD} Mode), $Gx = '0'$ (1x)

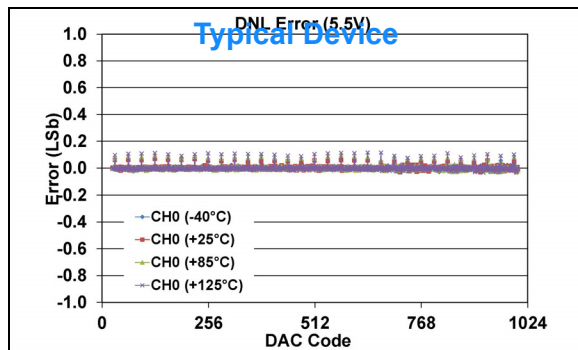


FIGURE 1-224: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(10-bit: $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

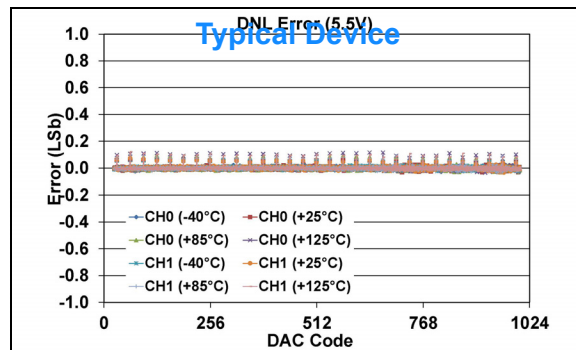


FIGURE 1-227: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(10-bit: $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

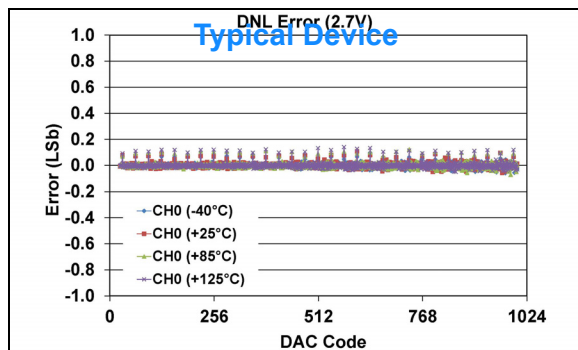


FIGURE 1-225: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(10-bit: $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

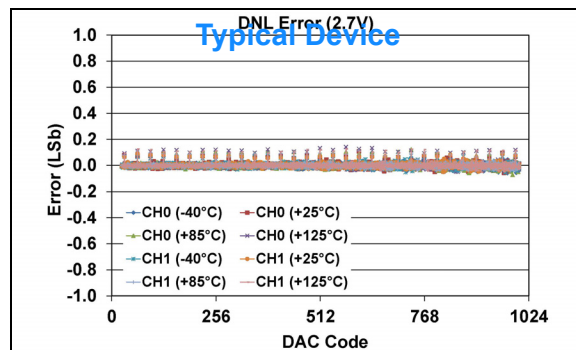


FIGURE 1-228: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(10-bit: $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

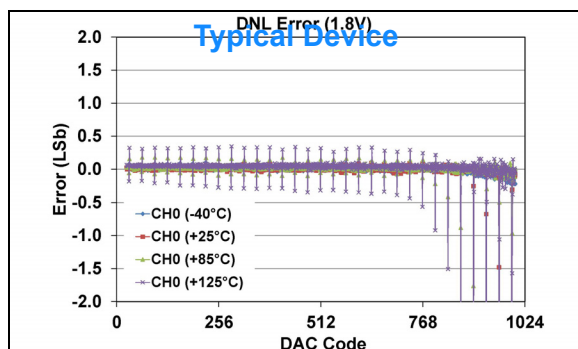


FIGURE 1-226: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(10-bit: $V_{DD} = 1.8\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x))
(see [Appendix B.1](#) for additional information).

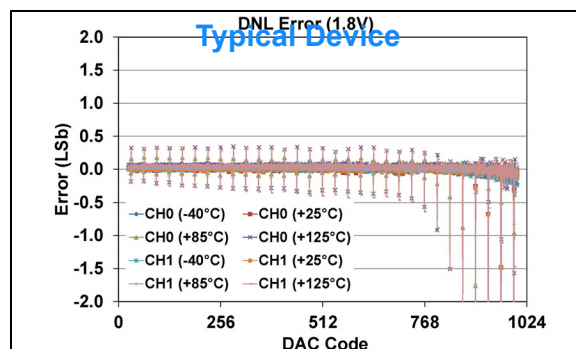


FIGURE 1-229: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(10-bit: $V_{DD} = 1.8\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x))
(see [Appendix B.1](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: VRxB:VRxA = '01' (Bandgap Mode)

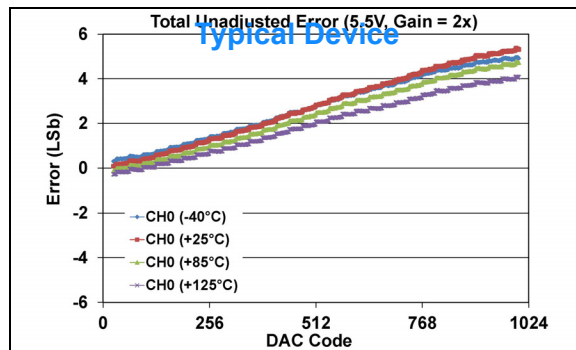


FIGURE 1-230: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB11)
(10-bit: $V_{DD} = 5.5\text{V}$, VRxB:VRxA = '01' (Bandgap), Gx = '1' (2x)).

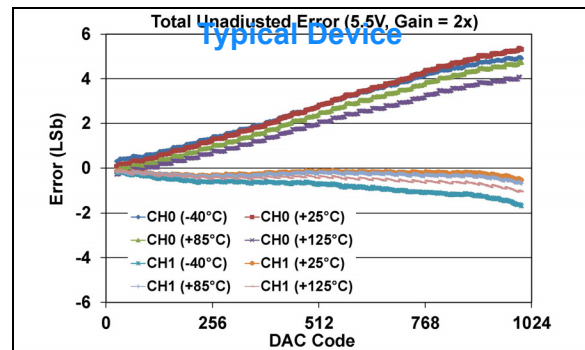


FIGURE 1-233: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB12)
(10-bit: $V_{DD} = 5.5\text{V}$, VRxB:VRxA = '01' (Bandgap), Gx = '1' (2x)).

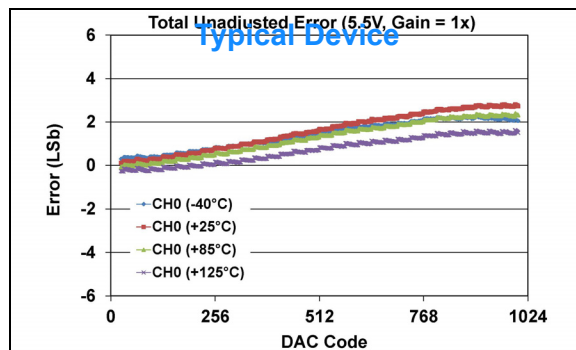


FIGURE 1-231: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB11)
(10-bit: $V_{DD} = 5.5\text{V}$, VRxB:VRxA = '01' (Bandgap), Gx = '0' (1x)).

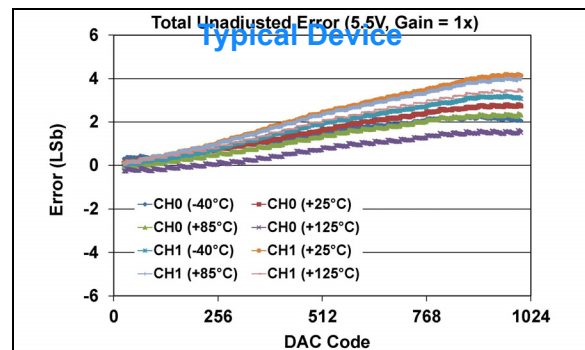


FIGURE 1-234: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB12)
(10-bit: $V_{DD} = 5.5\text{V}$, VRxB:VRxA = '01' (Bandgap), Gx = '0' (1x)).

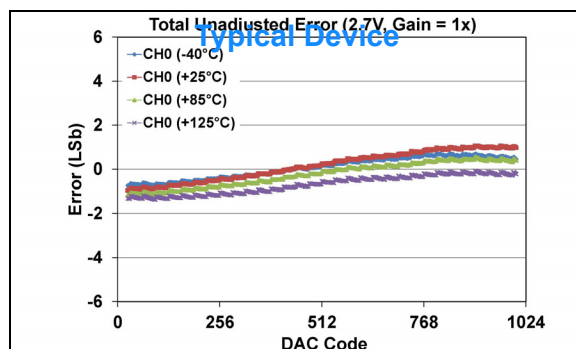


FIGURE 1-232: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB11)
(10-bit: $V_{DD} = 2.7\text{V}$, VRxB:VRxA = '01' (Bandgap), Gx = '0' (1x)).

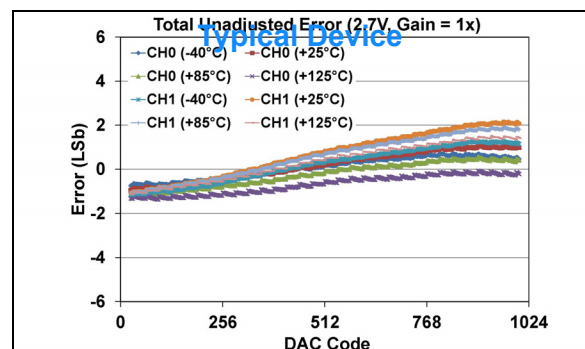


FIGURE 1-235: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB12)
(10-bit: $V_{DD} = 2.7\text{V}$, VRxB:VRxA = '01' (Bandgap), Gx = '0' (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '01'$ (Bandgap Mode)

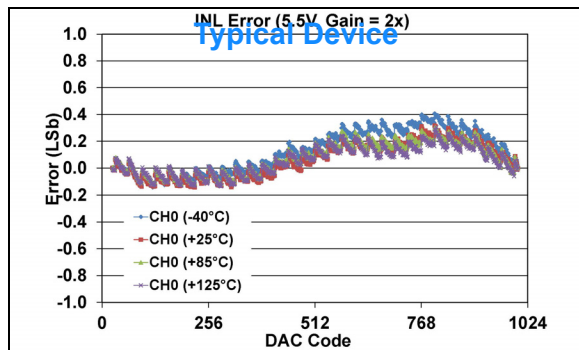


FIGURE 1-236: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(10-bit: $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $Gx = '1'$ (2x)).

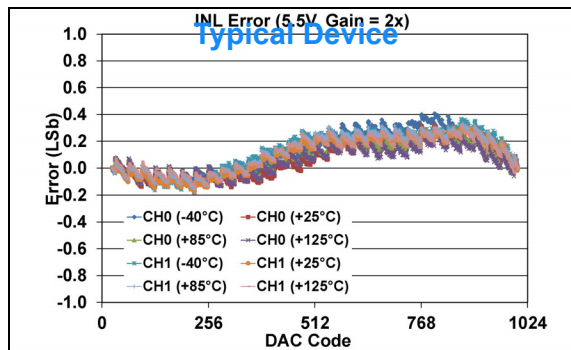


FIGURE 1-239: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(10-bit: $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $Gx = '1'$ (2x)).

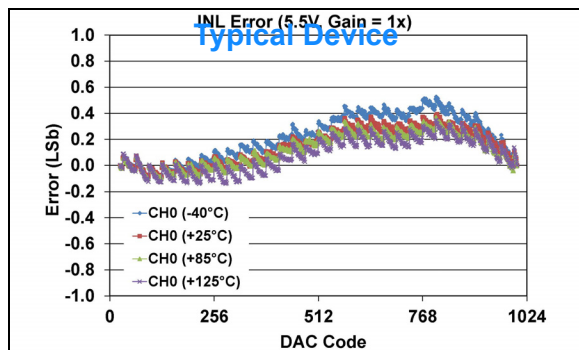


FIGURE 1-237: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(10-bit: $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $Gx = '0'$ (1x)).

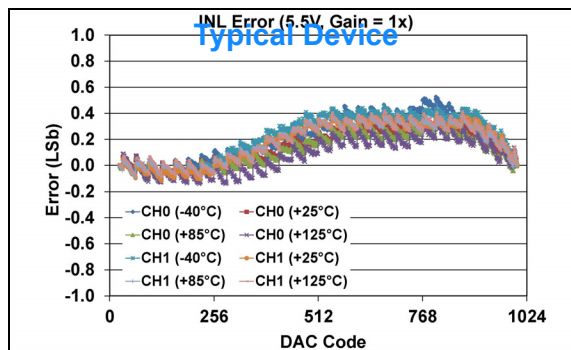


FIGURE 1-240: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(10-bit: $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $Gx = '0'$ (1x)).

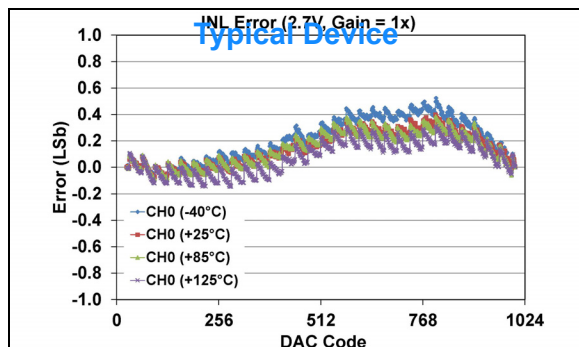


FIGURE 1-238: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(10-bit: $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $Gx = '0'$ (1x)).

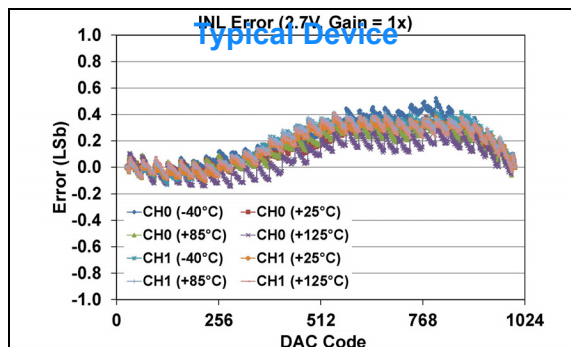


FIGURE 1-241: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(10-bit: $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $Gx = '0'$ (1x)).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: VRxB:VRxA = '01' (Bandgap Mode)

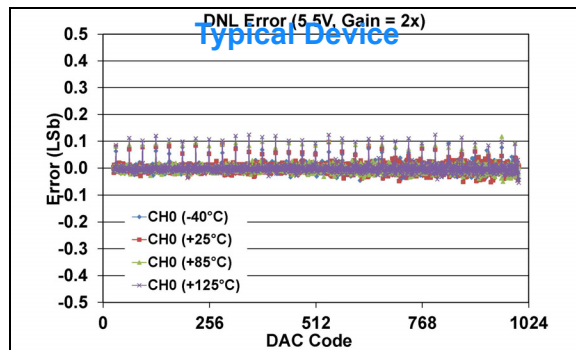


FIGURE 1-242: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - MCP47FXB11)
(10-bit: $V_{DD} = 5.5\text{V}$, VRxB:VRxA = '01' (Bandgap), Gx = '1' (2x)).

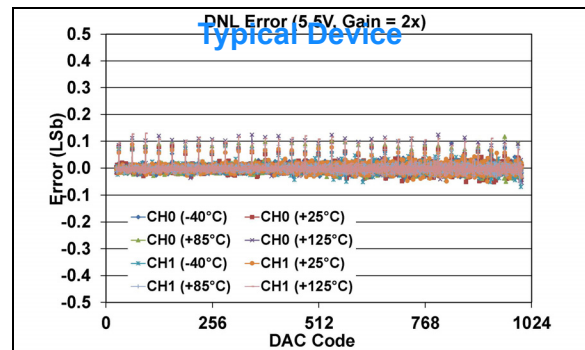


FIGURE 1-245: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - MCP47FXB12)
(10-bit: $V_{DD} = 5.5\text{V}$, VRxB:VRxA = '01' (Bandgap), Gx = '1' (2x)).

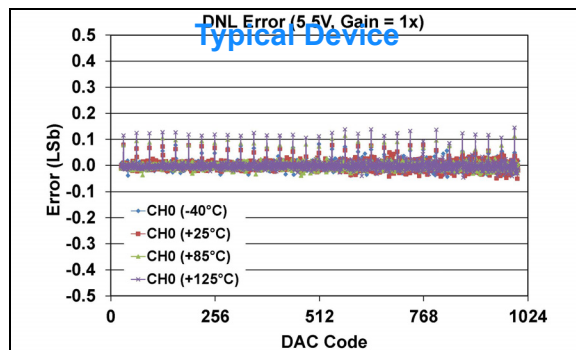


FIGURE 1-243: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - MCP47FXB11)
(10-bit: $V_{DD} = 5.5\text{V}$, VRxB:VRxA = '01' (Bandgap), Gx = '0' (1x)).

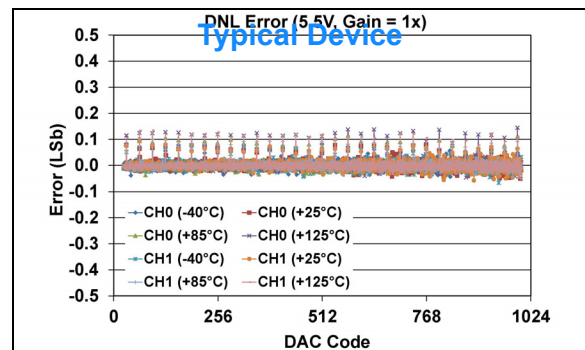


FIGURE 1-246: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - MCP47FXB12)
(10-bit: $V_{DD} = 5.5\text{V}$, VRxB:VRxA = '01' (Bandgap), Gx = '0' (1x)).

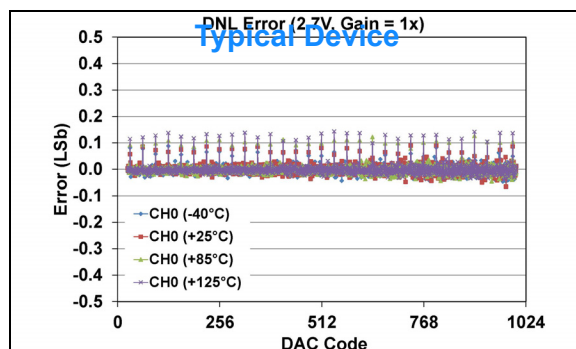


FIGURE 1-244: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - MCP47FXB11)
(10-bit: $V_{DD} = 2.7\text{V}$, VRxB:VRxA = '01' (Bandgap), Gx = '0' (1x)).

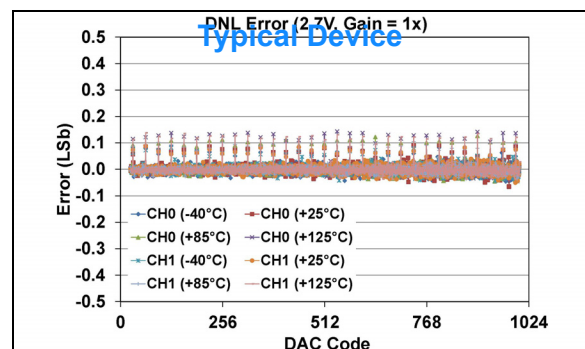


FIGURE 1-247: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - MCP47FXB12)
(10-bit: $V_{DD} = 2.7\text{V}$, VRxB:VRxA = '01' (Bandgap), Gx = '0' (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = V_{DD}$, $Gx = '0'$ (1x)

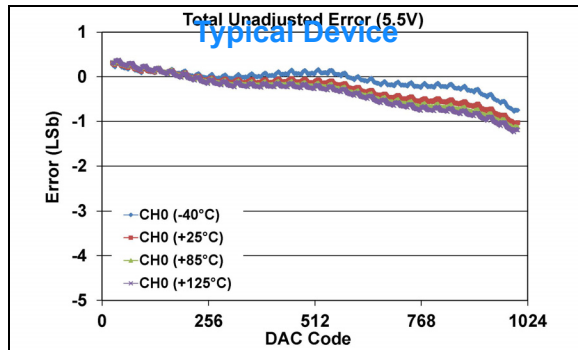


FIGURE 1-248: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB11**)

(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

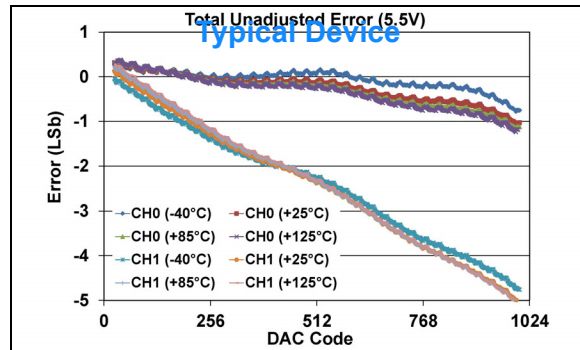


FIGURE 1-251: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB12**)

(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

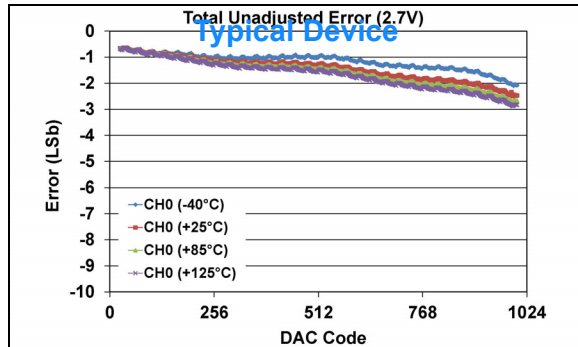


FIGURE 1-249: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB11**)

(10-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

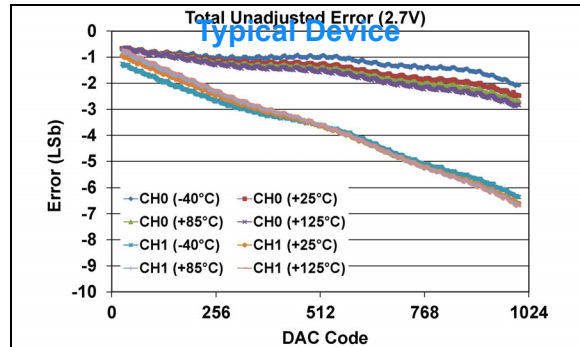


FIGURE 1-252: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB12**)

(10-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

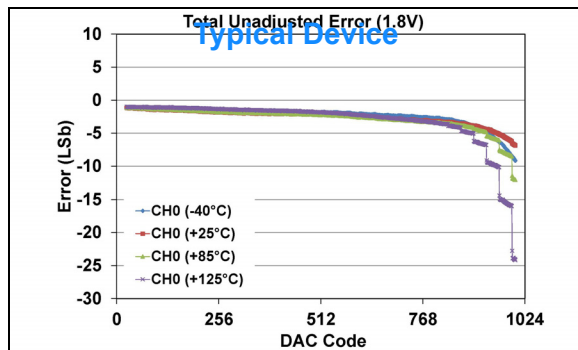


FIGURE 1-250: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB11**)

(10-bit: $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x))
(see [Appendix B.2](#) for additional information).

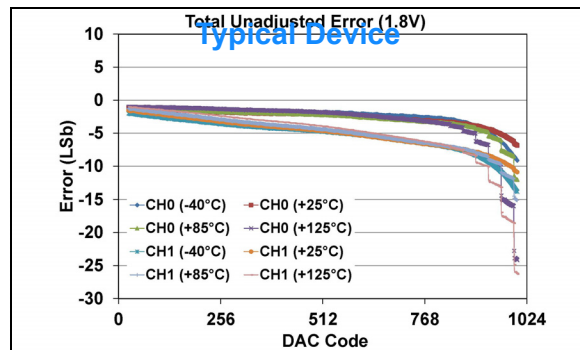


FIGURE 1-253: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB12**)

(10-bit: $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x))
(see [Appendix B.2](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = V_{DD}$, $Gx = '0'$ (1x)

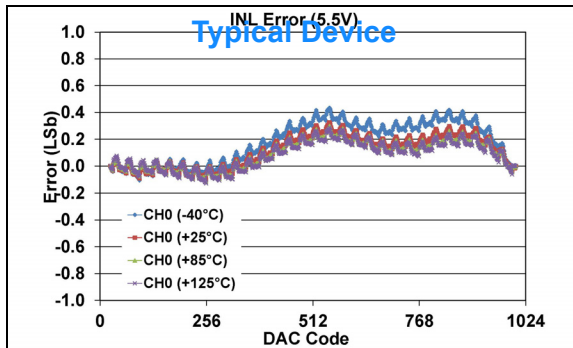


FIGURE 1-254: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

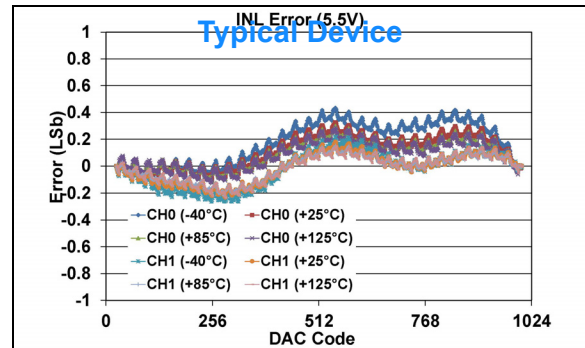


FIGURE 1-257: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

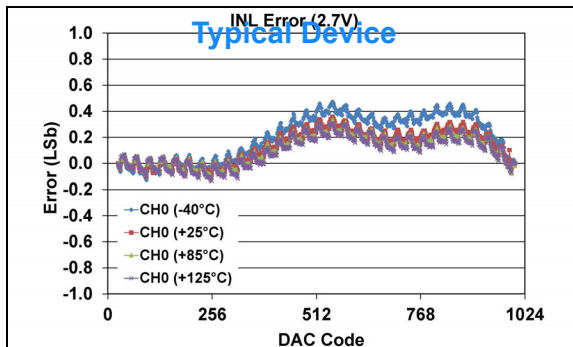


FIGURE 1-255: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

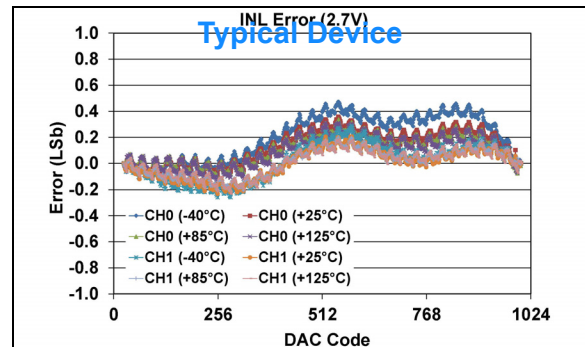


FIGURE 1-258: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

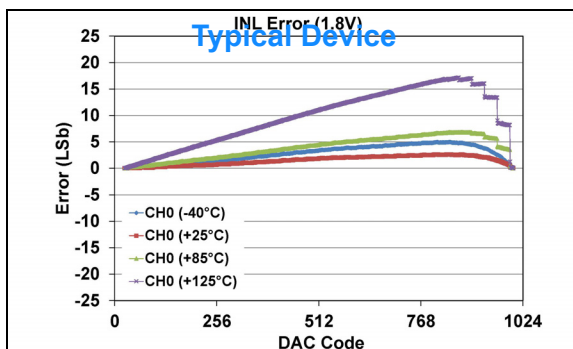


FIGURE 1-256: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x))
(see [Appendix B.2](#) for additional information).

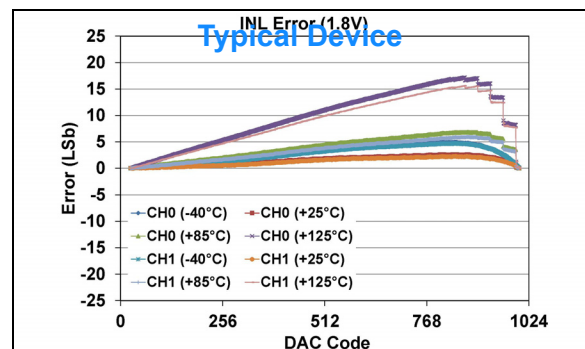


FIGURE 1-259: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x))
(see [Appendix B.2](#) for additional information).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = V_{DD}$, $Gx = '0'$ (1x)

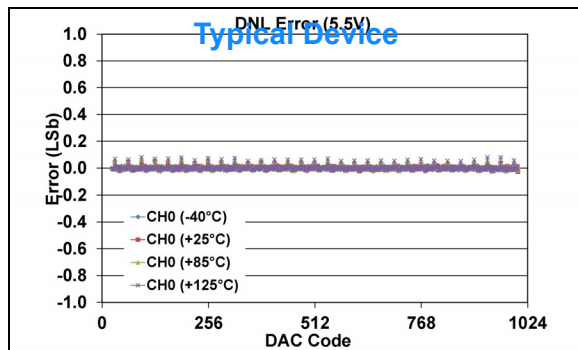


FIGURE 1-260: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

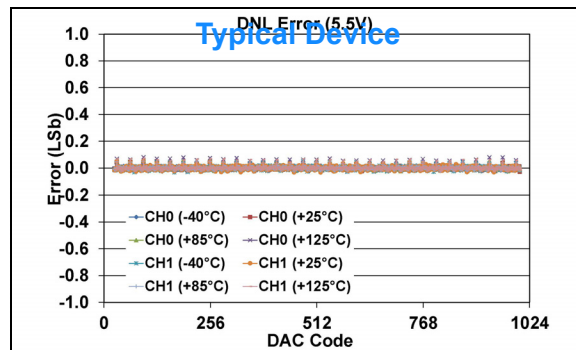


FIGURE 1-263: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

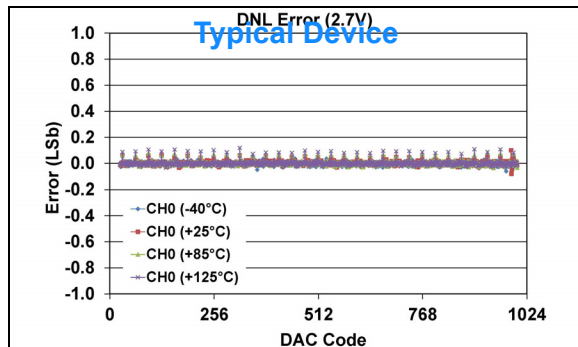


FIGURE 1-261: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

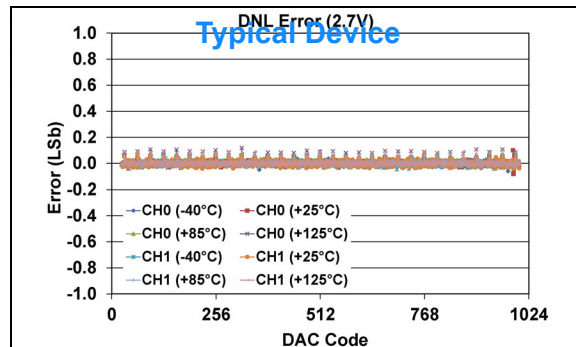


FIGURE 1-264: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

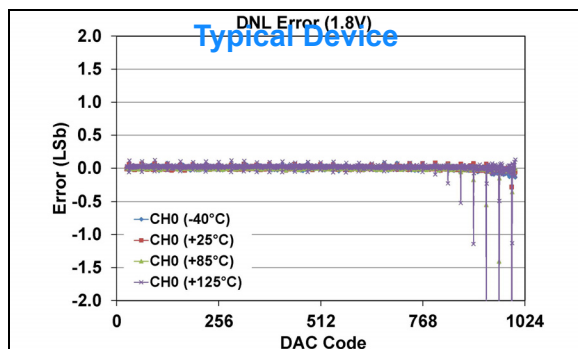


FIGURE 1-262: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x))
(see [Appendix B.2](#) for additional information).

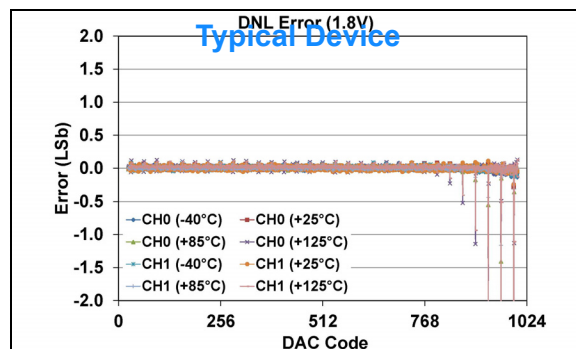


FIGURE 1-265: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x))
(see [Appendix B.2](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 1\text{V}$, $Gx = '0'$ (1x)

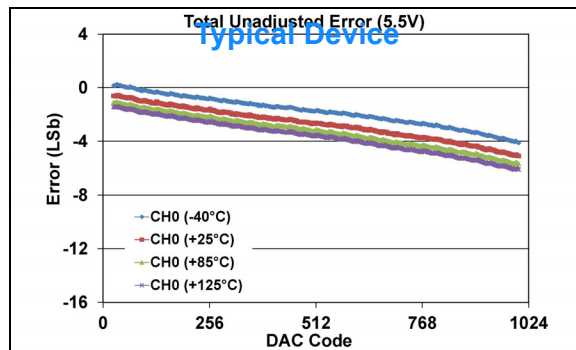


FIGURE 1-266: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB11)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

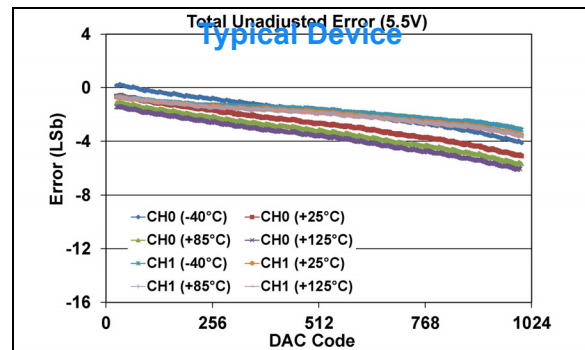


FIGURE 1-269: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB12)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

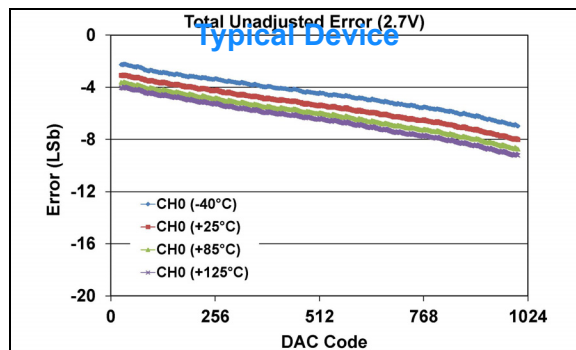


FIGURE 1-267: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB11)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

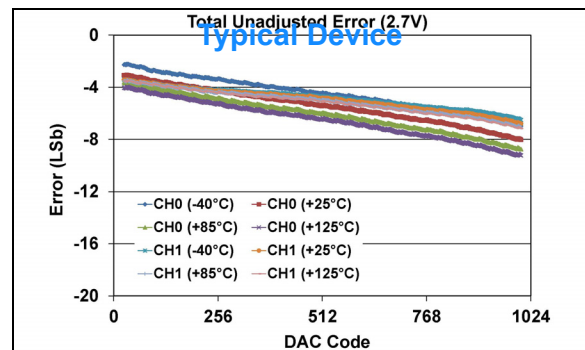


FIGURE 1-270: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB12)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

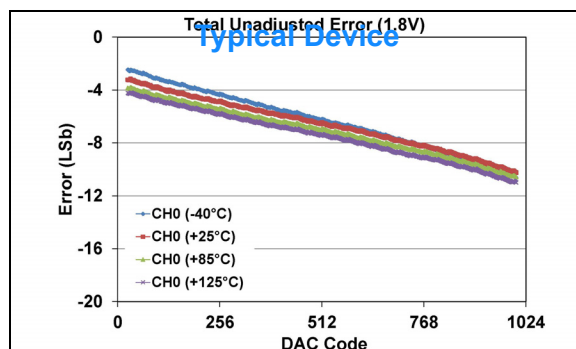


FIGURE 1-268: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB11)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

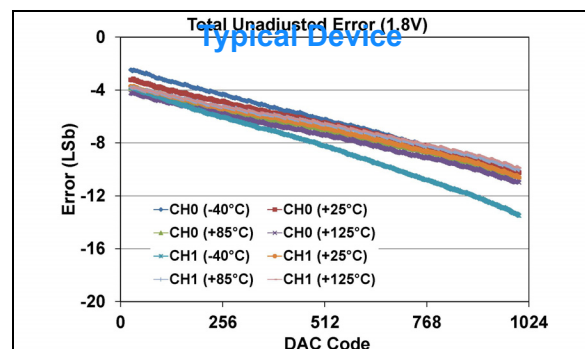


FIGURE 1-271: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB12)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 1\text{V}$, $Gx = '0'$ (1x)

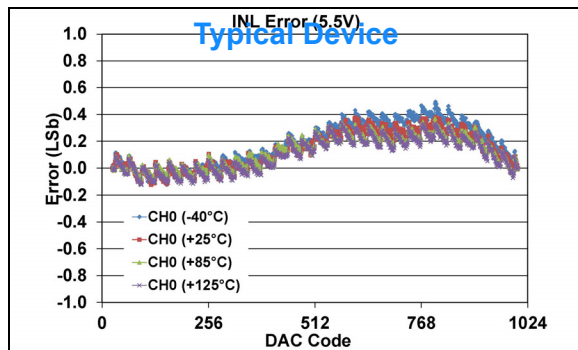


FIGURE 1-272: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

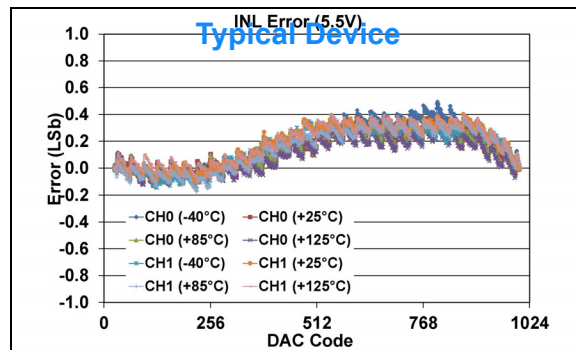


FIGURE 1-275: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

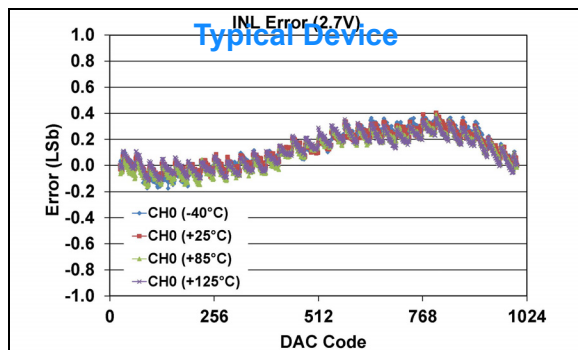


FIGURE 1-273: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

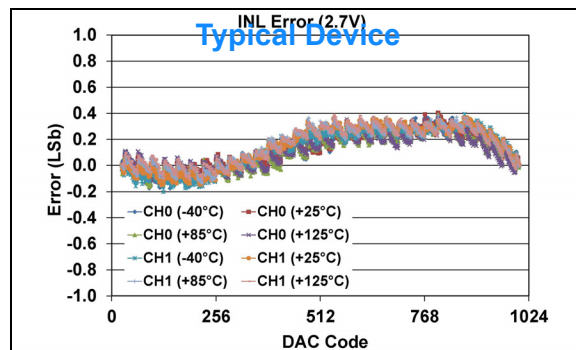


FIGURE 1-276: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

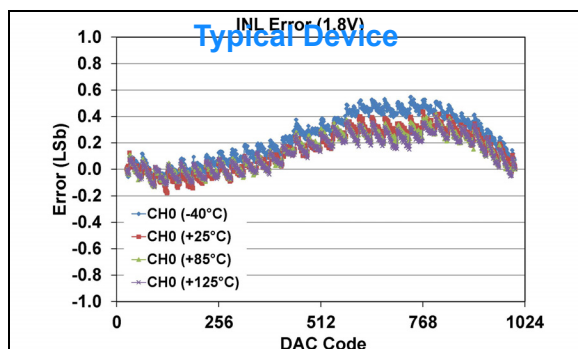


FIGURE 1-274: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

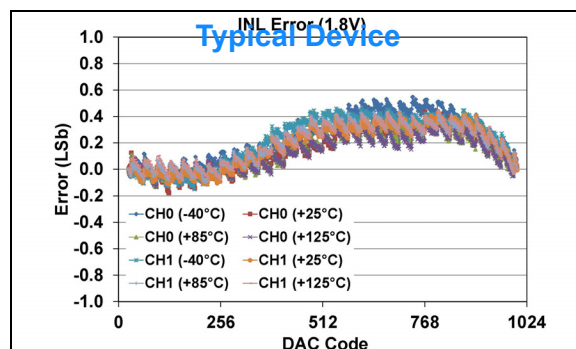


FIGURE 1-277: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 1\text{V}$, $Gx = '0'$ (1x)

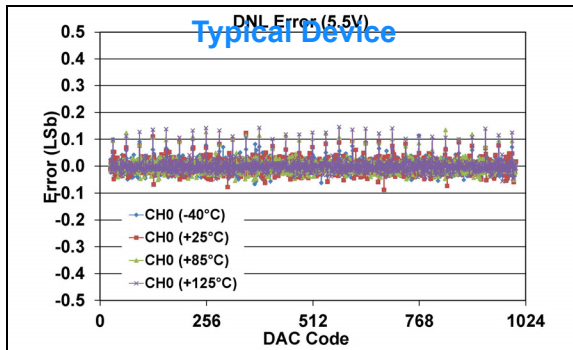


FIGURE 1-278: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - MCP47FXB11)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

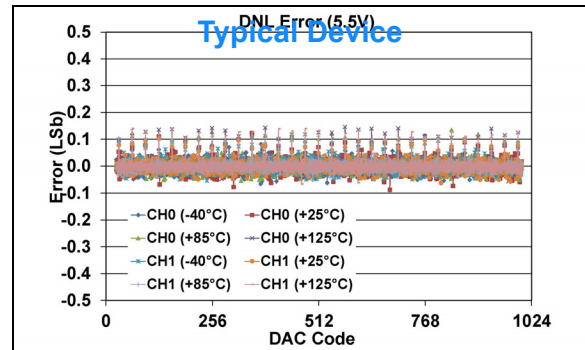


FIGURE 1-281: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - MCP47FXB12)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

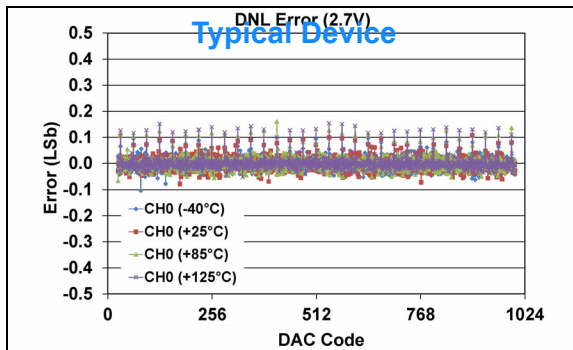


FIGURE 1-279: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - MCP47FXB11)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

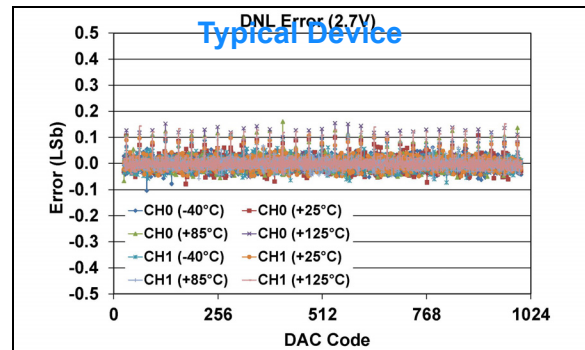


FIGURE 1-282: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - MCP47FXB12)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

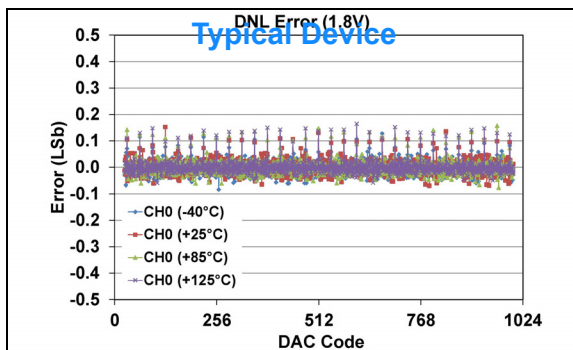


FIGURE 1-280: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - MCP47FXB11)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

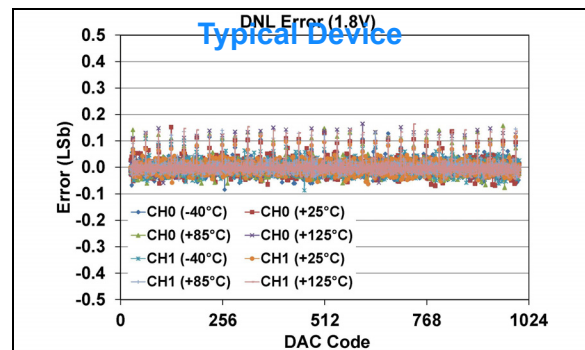


FIGURE 1-283: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - MCP47FXB12)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 1\text{V}$, $Gx = '1'$ (2x)

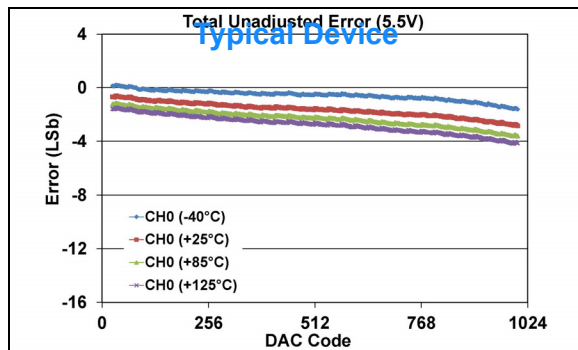


FIGURE 1-284: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

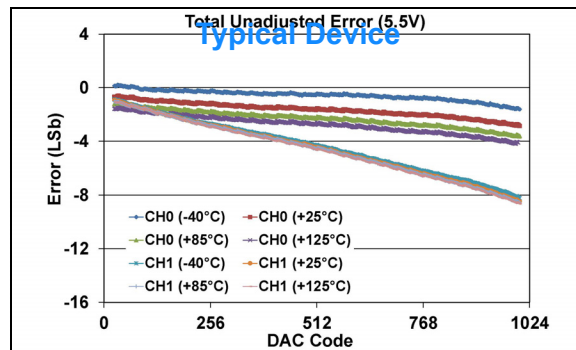


FIGURE 1-287: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

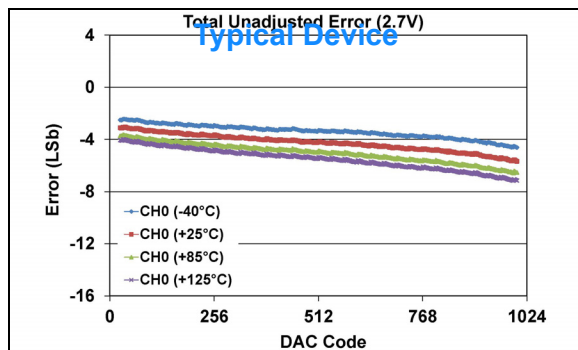


FIGURE 1-285: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

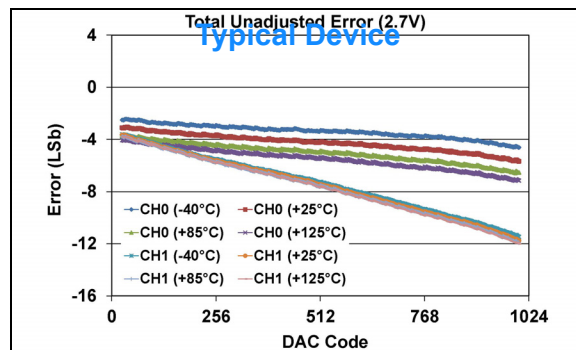


FIGURE 1-288: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

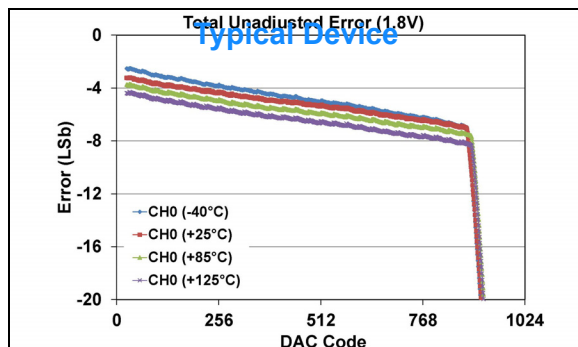


FIGURE 1-286: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x))
(see [Appendix B.3](#) for additional information).

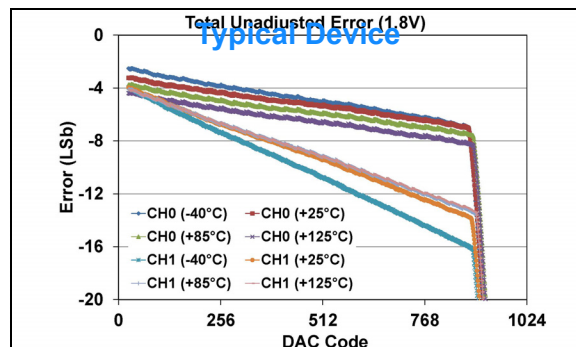


FIGURE 1-289: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x))
(see [Appendix B.3](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 1\text{V}$, $Gx = '1'$ (2x)

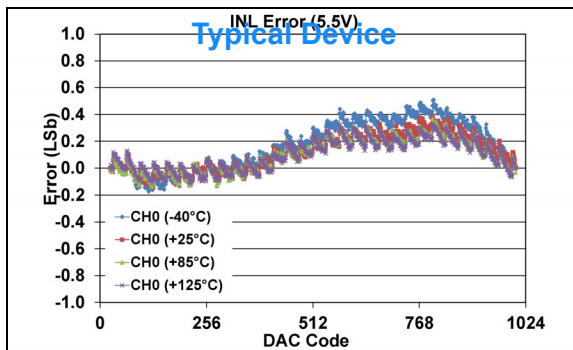


FIGURE 1-290: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - MCP47FXB11)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

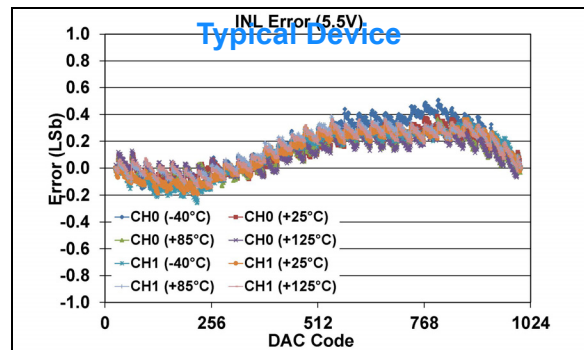


FIGURE 1-293: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - MCP47FXB12)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

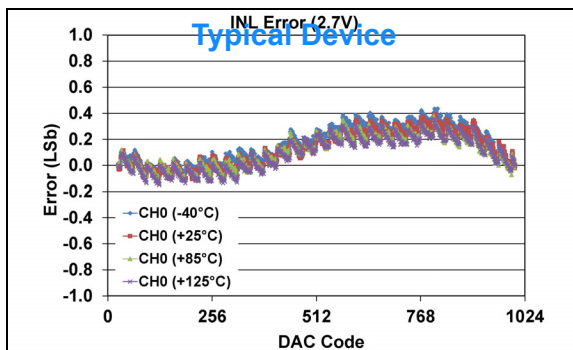


FIGURE 1-291: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - MCP47FXB11)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

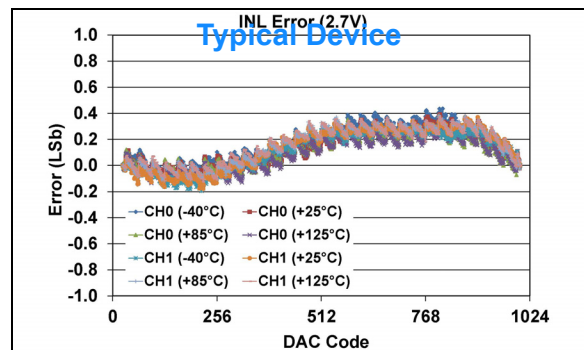


FIGURE 1-294: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - MCP47FXB12)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

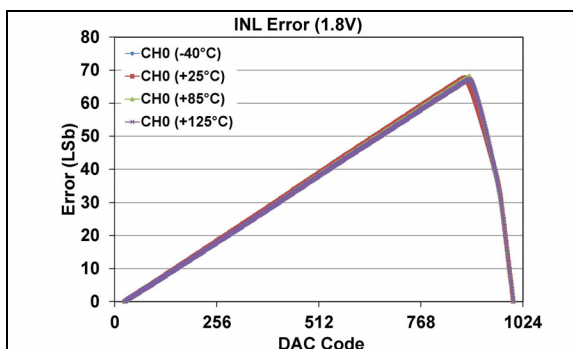


FIGURE 1-292: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - MCP47FXB11)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x))
(see [Appendix B.3](#) for additional information).

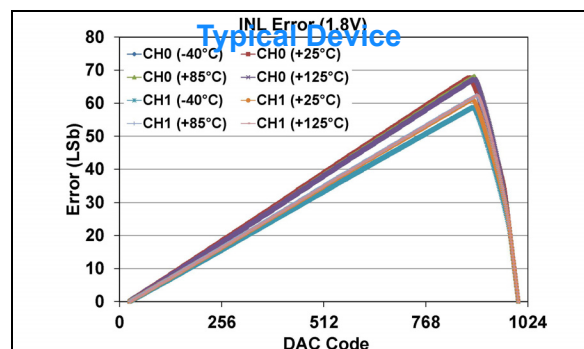


FIGURE 1-295: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - MCP47FXB12)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x))
(see [Appendix B.3](#) for additional information).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 1\text{V}$, $Gx = '1'$ (2x)

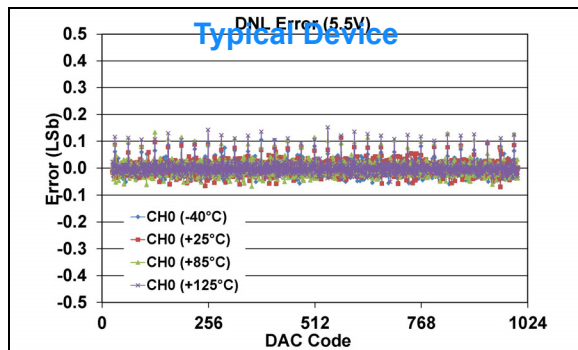


FIGURE 1-296: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

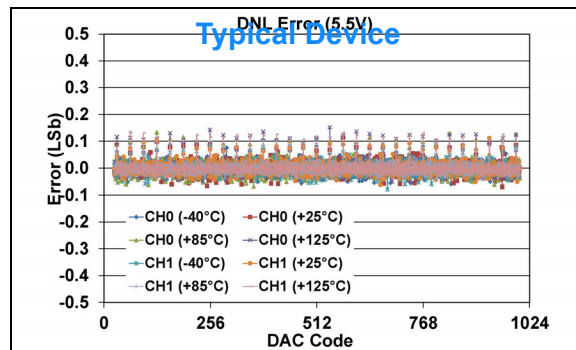


FIGURE 1-299: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

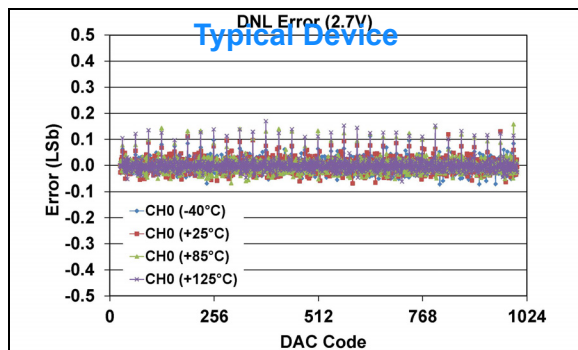


FIGURE 1-297: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

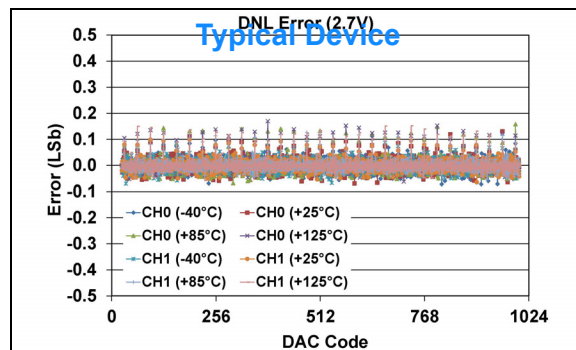


FIGURE 1-300: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

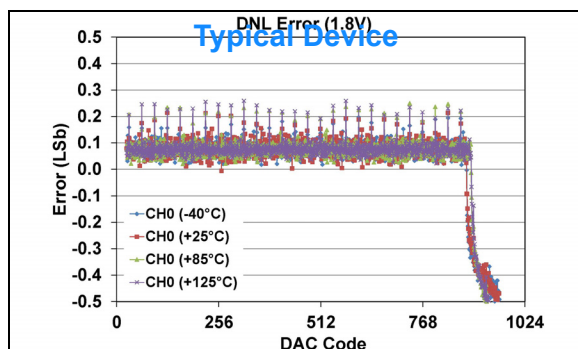


FIGURE 1-298: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x))
(see [Appendix B.3](#) for additional information).

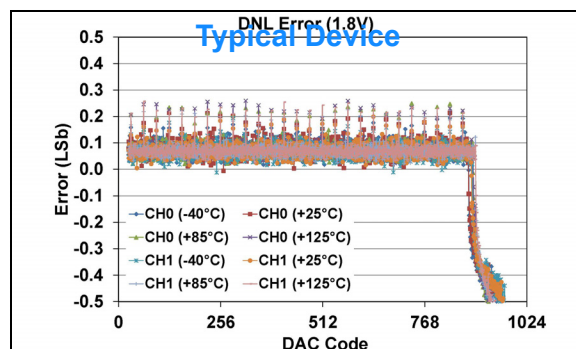


FIGURE 1-301: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x))
(see [Appendix B.3](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 2.048\text{V}$

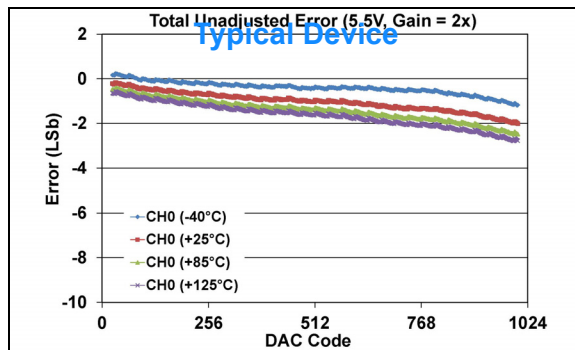


FIGURE 1-302: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB11)
(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

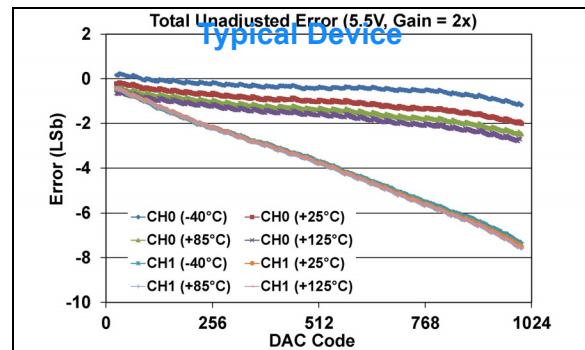


FIGURE 1-305: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB12)
(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

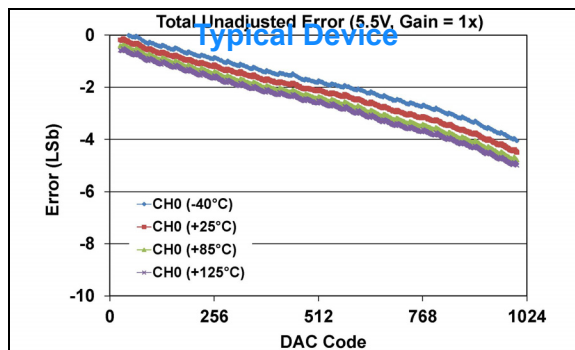


FIGURE 1-303: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB11)
(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

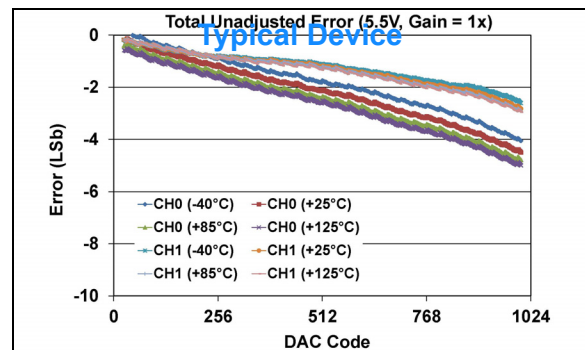


FIGURE 1-306: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB12)
(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

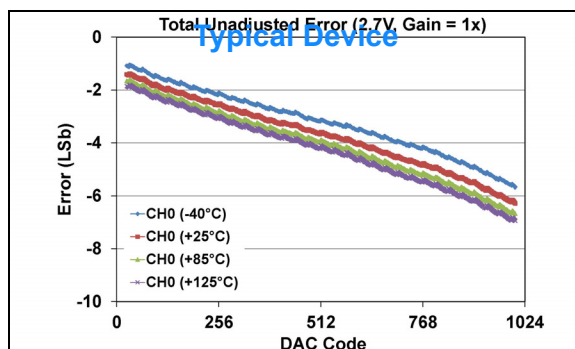


FIGURE 1-304: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB11)
(10-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

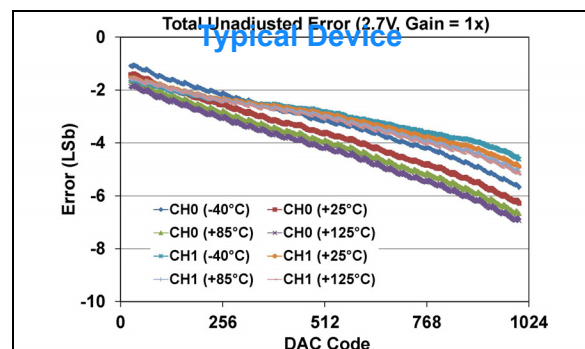


FIGURE 1-307: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB12)
(10-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 2.048\text{V}$

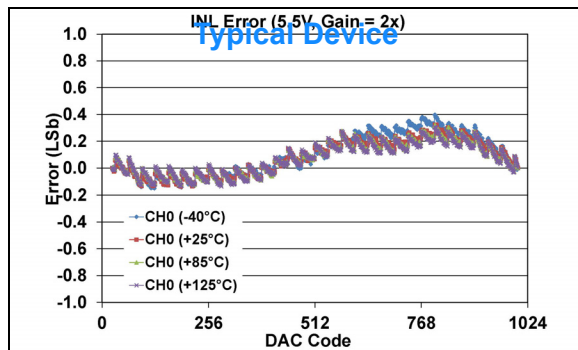


FIGURE 1-308: INL Error vs. DAC Code, and Temperature (Code 25 - 1000)
(Single Channel - **MCP47FXB11**)
(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

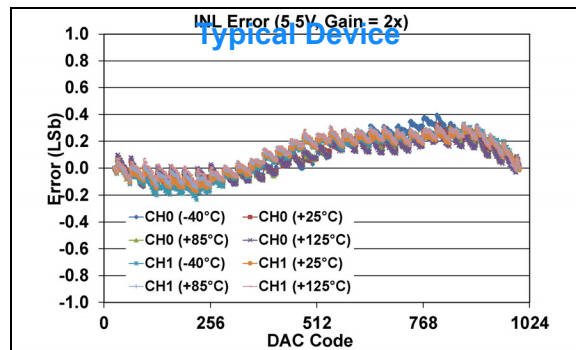


FIGURE 1-311: INL Error vs. DAC Code, and Temperature (Code 25 - 1000)
(Dual Channel - **MCP47FXB12**)
(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

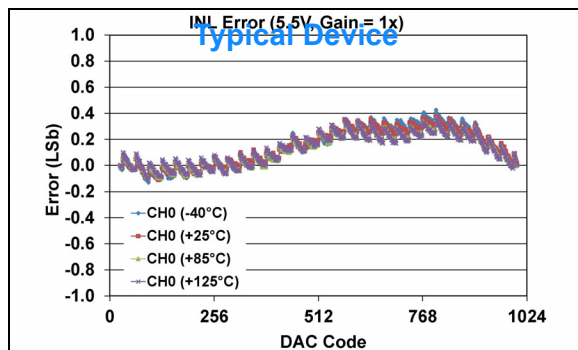


FIGURE 1-309: INL Error vs. DAC Code, and Temperature (Code 25 - 1000)
(Single Channel - **MCP47FXB11**)
(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

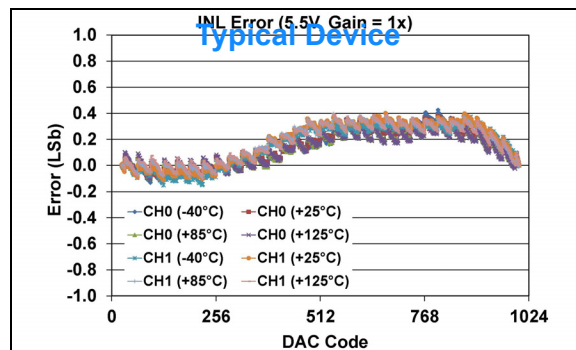


FIGURE 1-312: INL Error vs. DAC Code, and Temperature (Code 25 - 1000)
(Dual Channel - **MCP47FXB12**)
(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

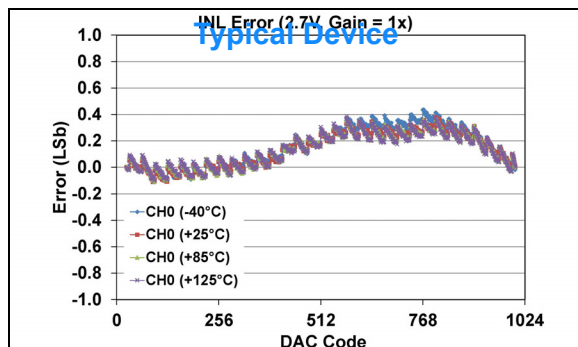


FIGURE 1-310: INL Error vs. DAC Code, and Temperature (Code 25 - 1000)
(Single Channel - **MCP47FXB11**)
(10-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

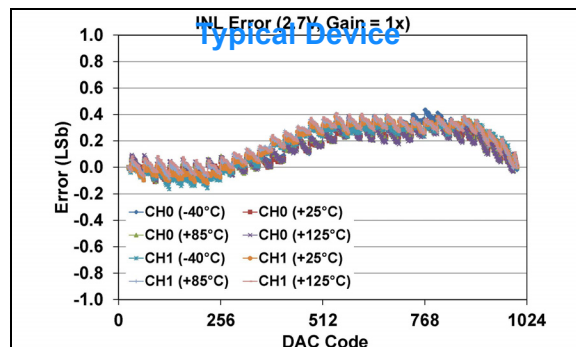


FIGURE 1-313: INL Error vs. DAC Code, and Temperature (Code 25 - 1000)
(Dual Channel - **MCP47FXB12**)
(10-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 2.048\text{V}$

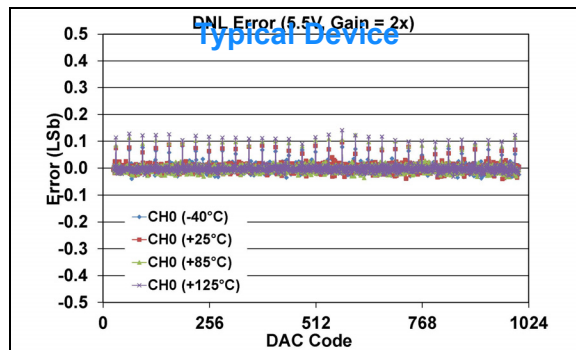


FIGURE 1-314: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - MCP47FXB11)
(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

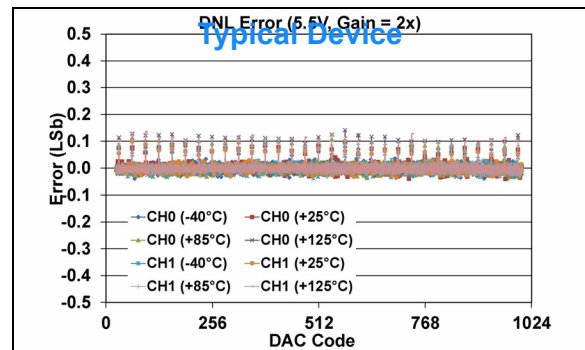


FIGURE 1-317: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - MCP47FXB12)
(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

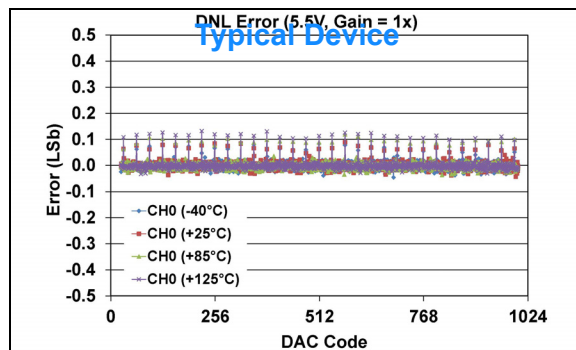


FIGURE 1-315: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - MCP47FXB11)
(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

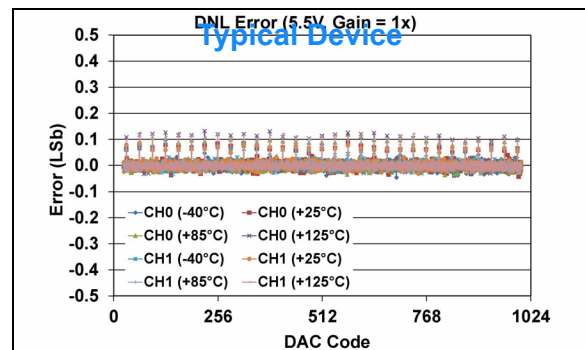


FIGURE 1-318: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - MCP47FXB12)
(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

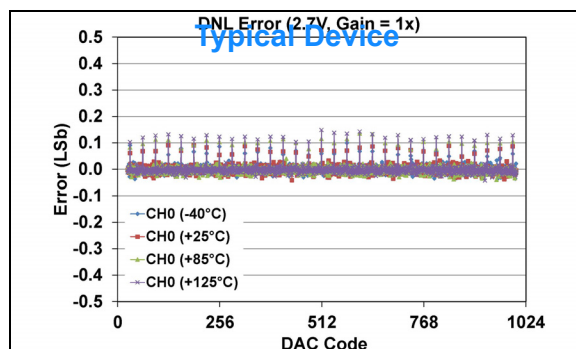


FIGURE 1-316: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - MCP47FXB11)
(10-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

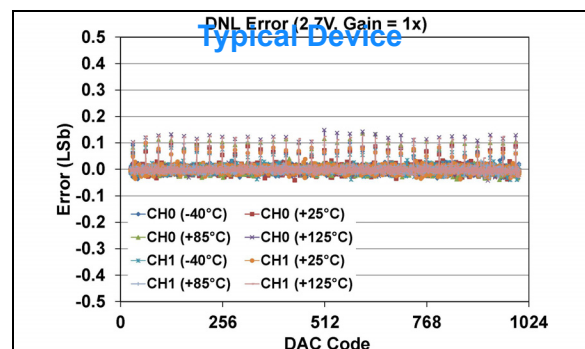


FIGURE 1-319: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - MCP47FXB12)
(10-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = V_{DD}$, $Gx = '0'$ (1x)

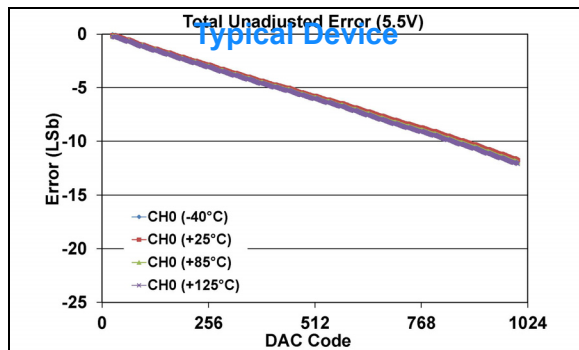


FIGURE 1-320: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB11)

(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

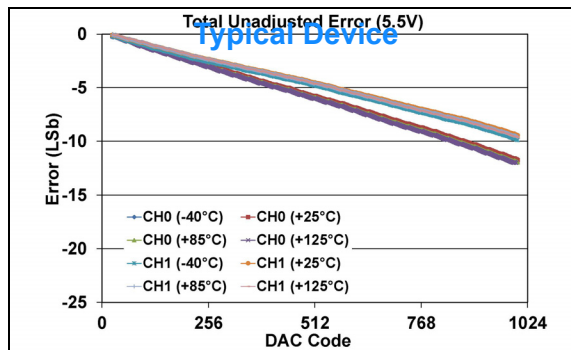


FIGURE 1-323: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB12)

(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

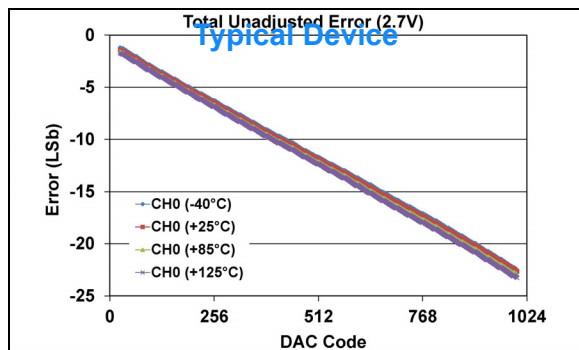


FIGURE 1-321: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB11)

(10-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

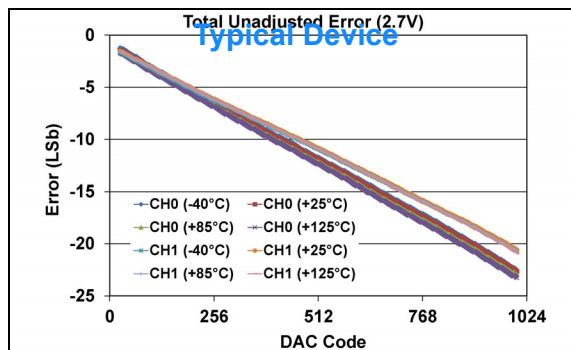


FIGURE 1-324: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB12)

(10-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

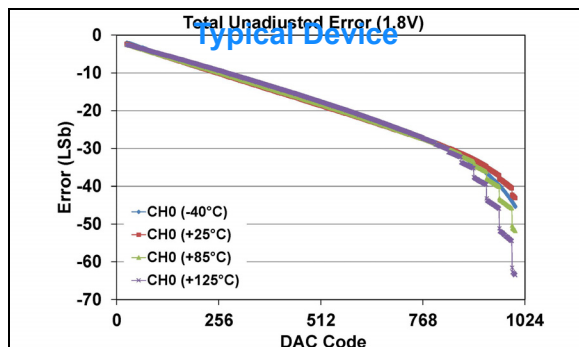


FIGURE 1-322: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB11)

(10-bit: $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x))
(see [Appendix B.4](#) for additional information).

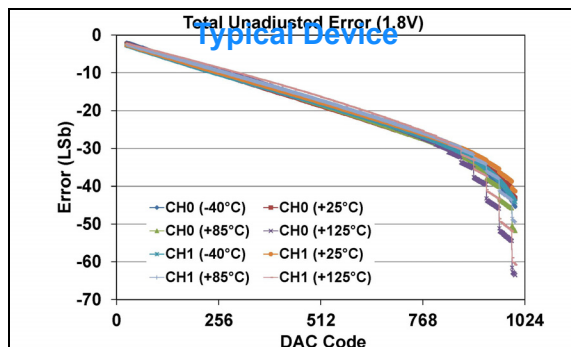


FIGURE 1-325: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB12)

(10-bit: $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x))
(see [Appendix B.4](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = V_{DD}$, $Gx = '0'$ (1x)

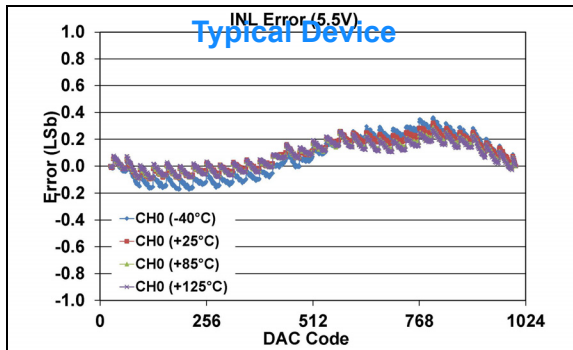


FIGURE 1-326: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - MCP47FXB11)
(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

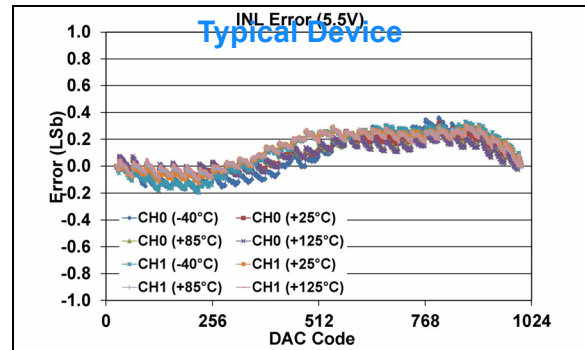


FIGURE 1-329: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - MCP47FXB12)
(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

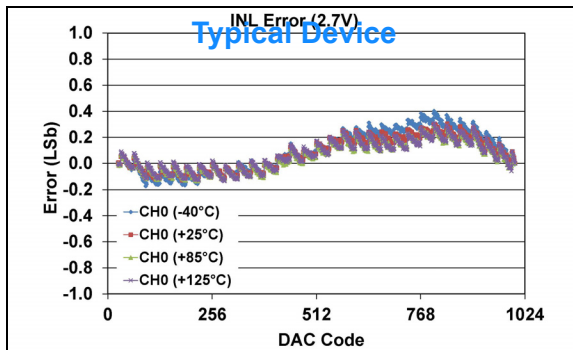


FIGURE 1-327: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - MCP47FXB11)
(10-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

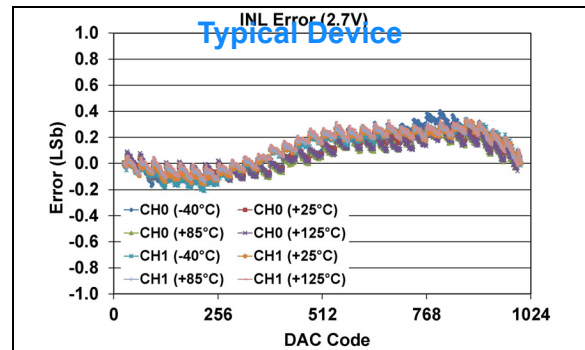


FIGURE 1-330: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - MCP47FXB12)
(10-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

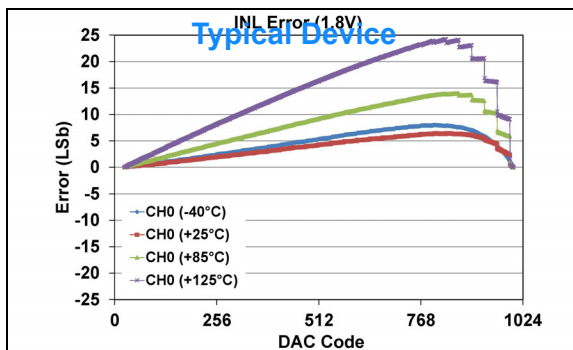


FIGURE 1-328: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - MCP47FXB11)
(10-bit: $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x))
(see [Appendix B.4](#) for additional information).

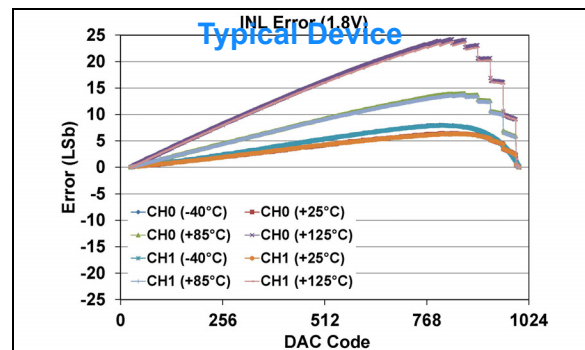


FIGURE 1-331: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - MCP47FXB12)
(10-bit: $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x))
(see [Appendix B.4](#) for additional information).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = V_{DD}$, $Gx = '0'$ (1x)

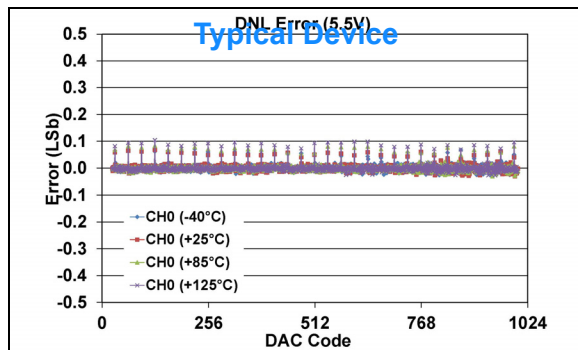


FIGURE 1-332: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000)
(Single Channel - **MCP47FXB11**)
(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

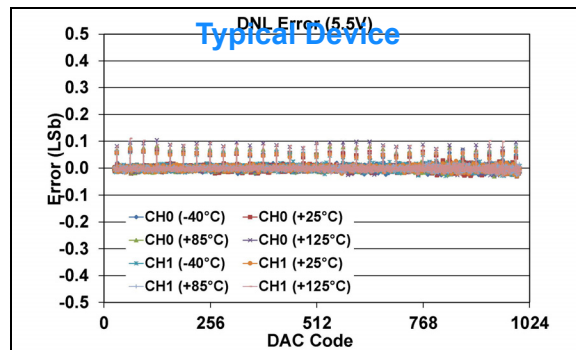


FIGURE 1-335: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000)
(Dual Channel - **MCP47FXB12**)
(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

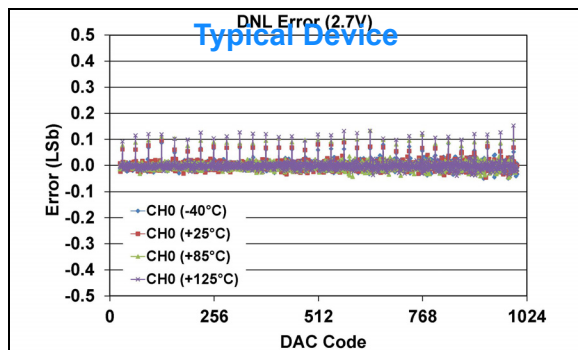


FIGURE 1-333: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000)
(Single Channel - **MCP47FXB11**)
(10-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

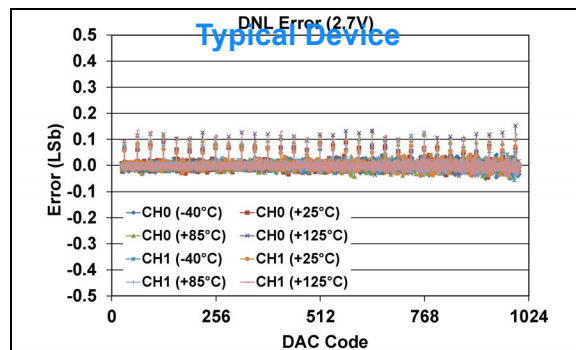


FIGURE 1-336: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000)
(Dual Channel - **MCP47FXB12**)
(10-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

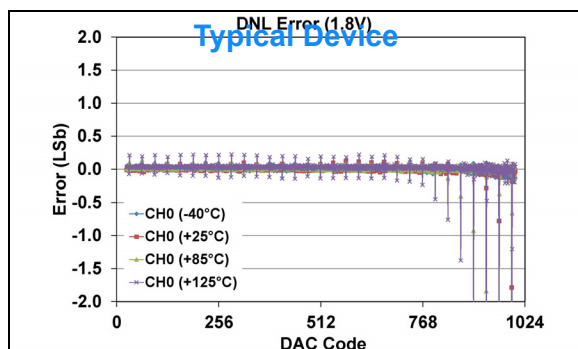


FIGURE 1-334: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000)
(Single Channel - **MCP47FXB11**)
(10-bit: $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x))
(see [Appendix B.4](#) for additional information).

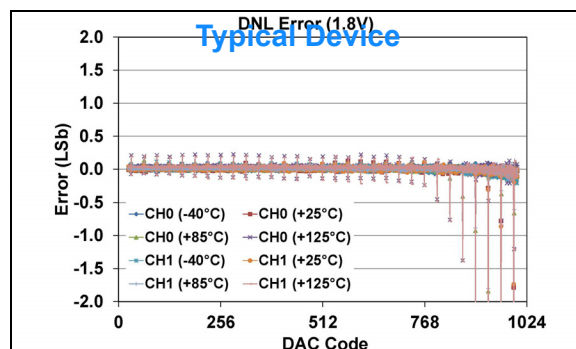


FIGURE 1-337: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000)
(Dual Channel - **MCP47FXB12**)
(10-bit: $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x))
(see [Appendix B.4](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 1\text{V}$, $Gx = '0'$ (1x)

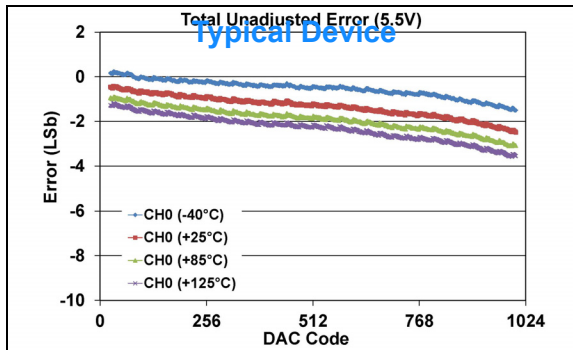


FIGURE 1-338: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB11)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

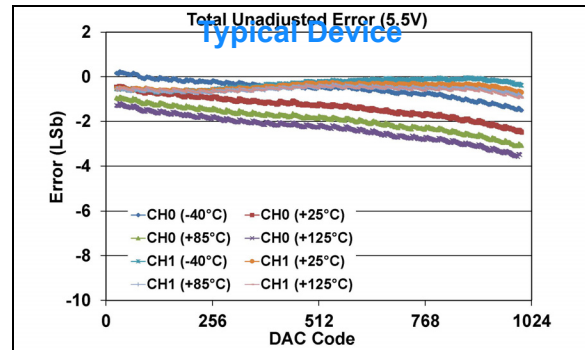


FIGURE 1-341: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB12)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

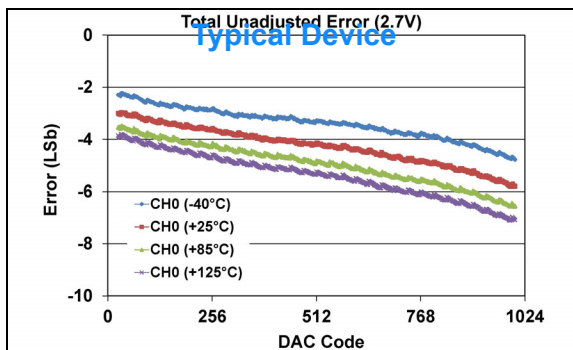


FIGURE 1-339: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB11)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

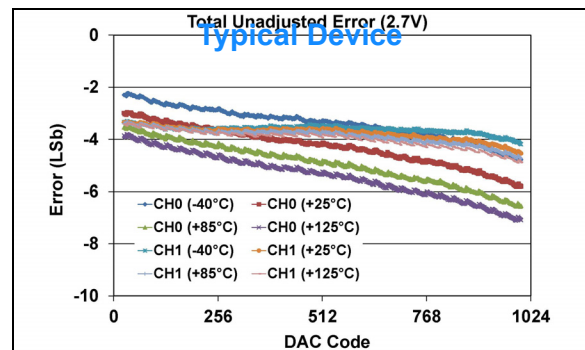


FIGURE 1-342: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB12)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

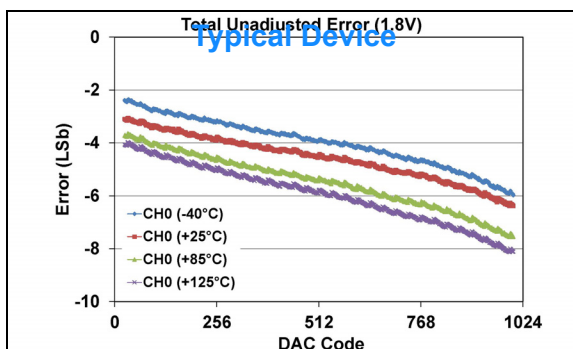


FIGURE 1-340: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB11)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

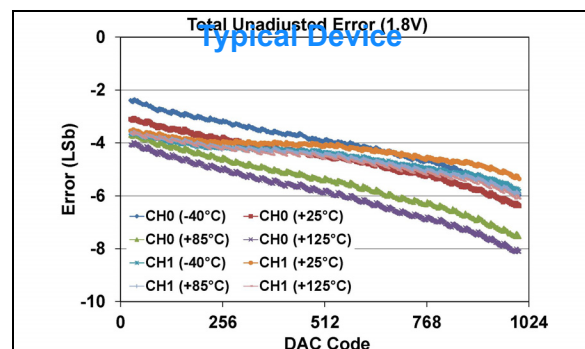


FIGURE 1-343: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB12)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 1\text{V}$, $Gx = '0'$ (1x)

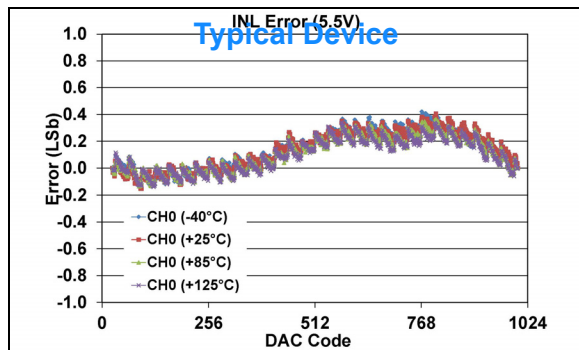


FIGURE 1-344: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

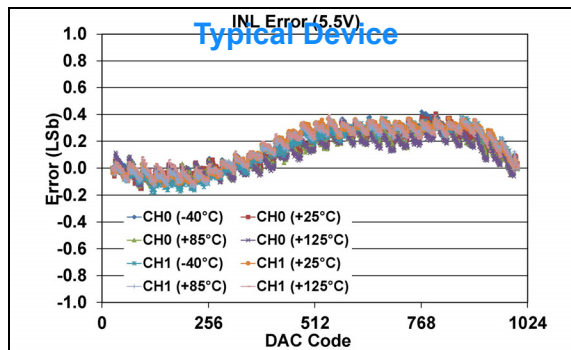


FIGURE 1-347: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

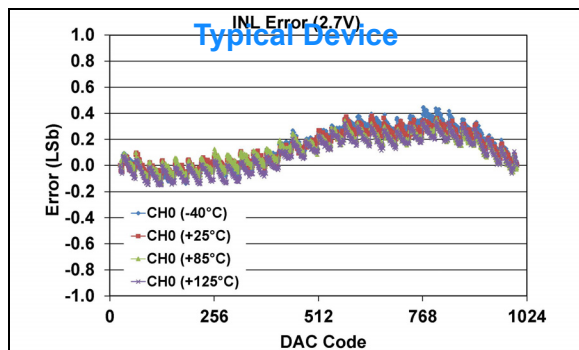


FIGURE 1-345: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

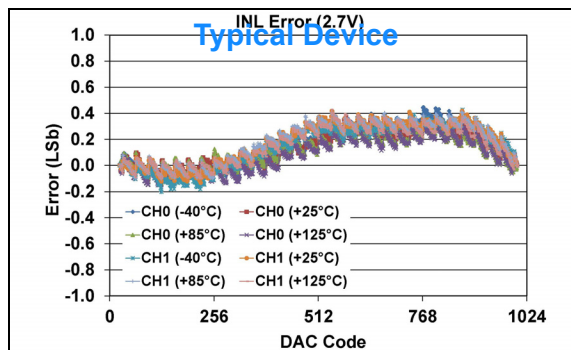


FIGURE 1-348: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

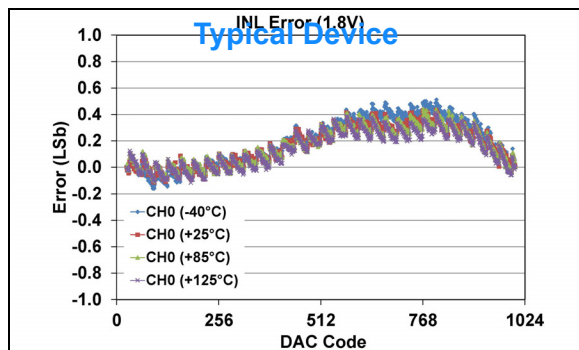


FIGURE 1-346: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

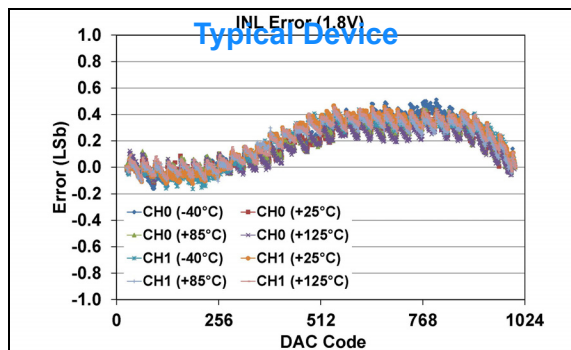


FIGURE 1-349: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 1\text{V}$, $Gx = '0'$ (1x)

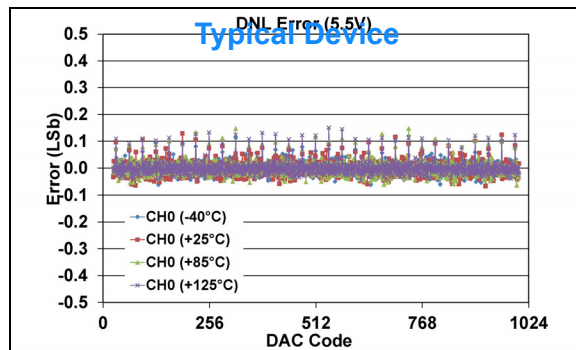


FIGURE 1-350: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - MCP47FXB11)
(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

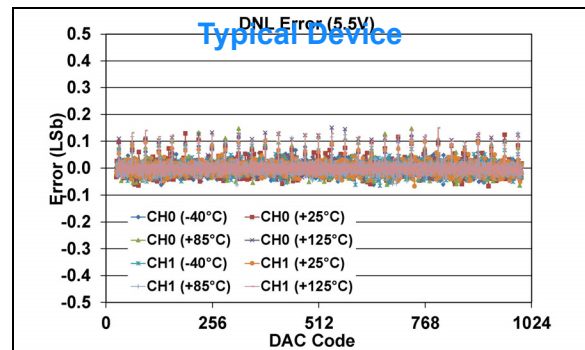


FIGURE 1-353: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - MCP47FXB12)
(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

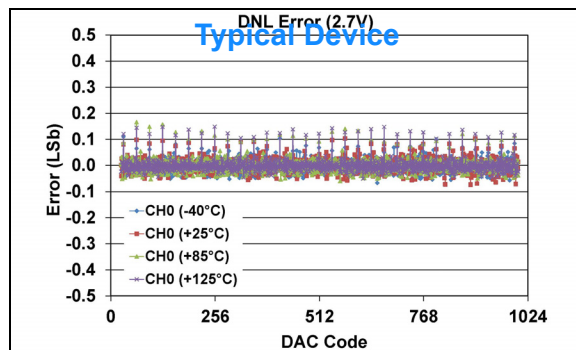


FIGURE 1-351: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - MCP47FXB11)
(10-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

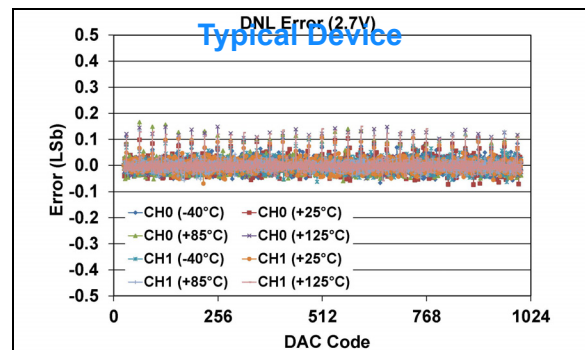


FIGURE 1-354: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - MCP47FXB12)
(10-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

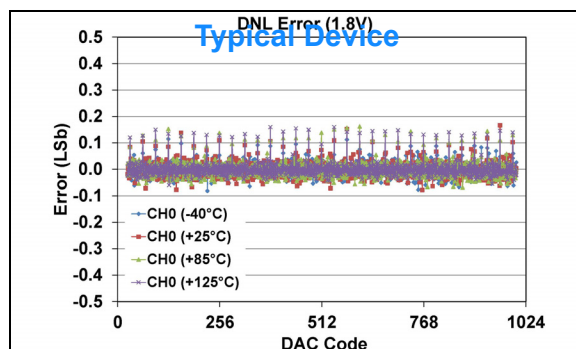


FIGURE 1-352: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - MCP47FXB11)
(10-bit: $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

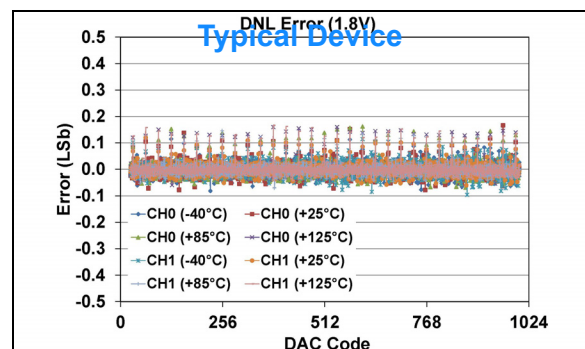


FIGURE 1-355: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - MCP47FXB12)
(10-bit: $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 1\text{V}$, $Gx = '1'$ (2x)

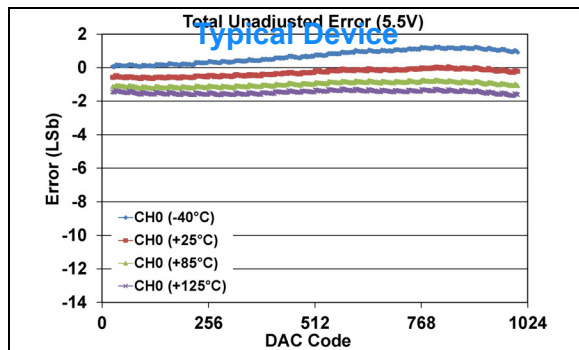


FIGURE 1-356: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

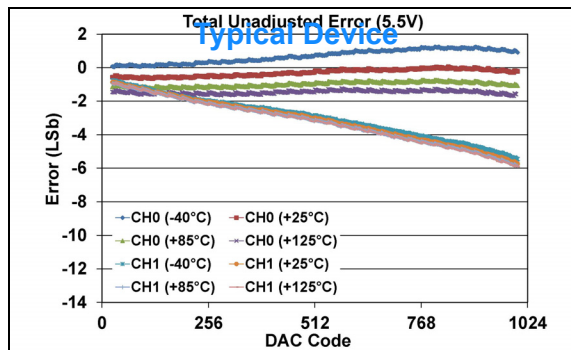


FIGURE 1-359: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

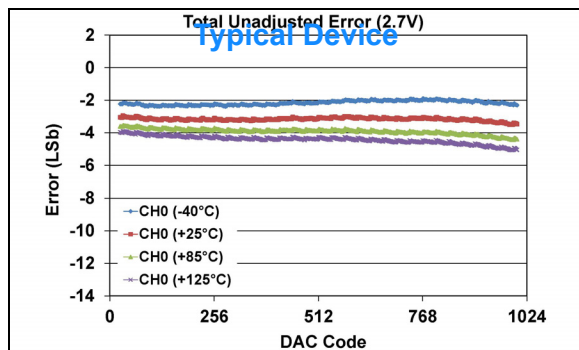


FIGURE 1-357: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

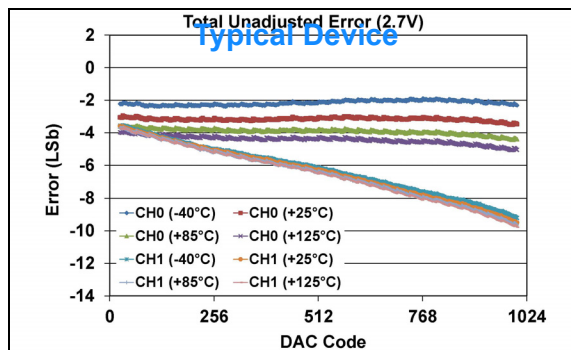


FIGURE 1-360: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

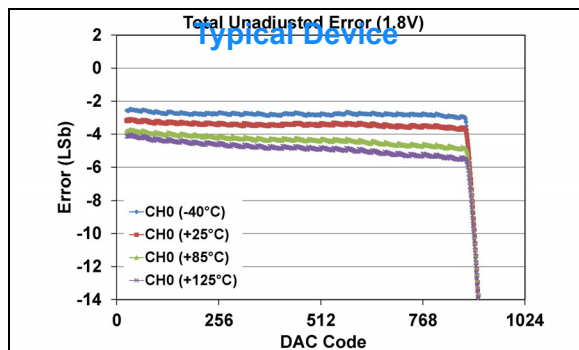


FIGURE 1-358: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x))
(see [Appendix B.5](#) for additional information).

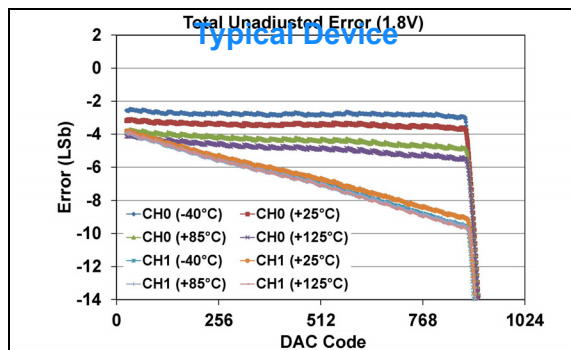


FIGURE 1-361: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x))
(see [Appendix B.5](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 1\text{V}$, $Gx = '1'$ (2x)

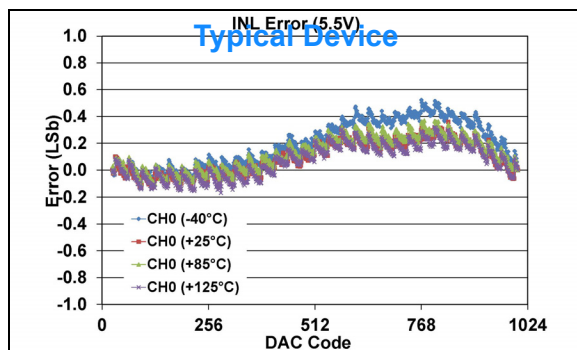


FIGURE 1-362: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - MCP47FXB11)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

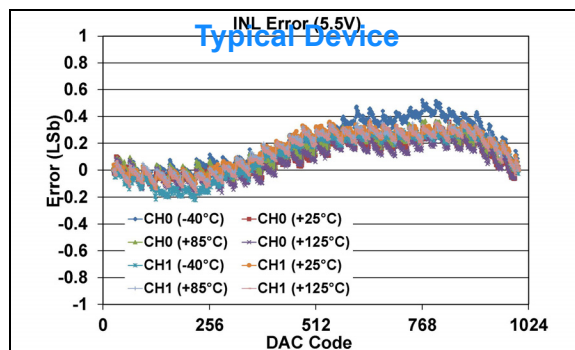


FIGURE 1-365: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - MCP47FXB12)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

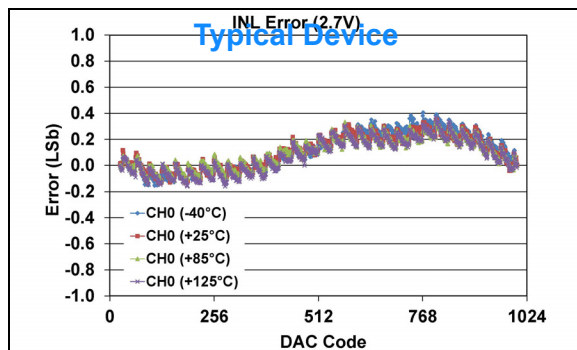


FIGURE 1-363: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - MCP47FXB11)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

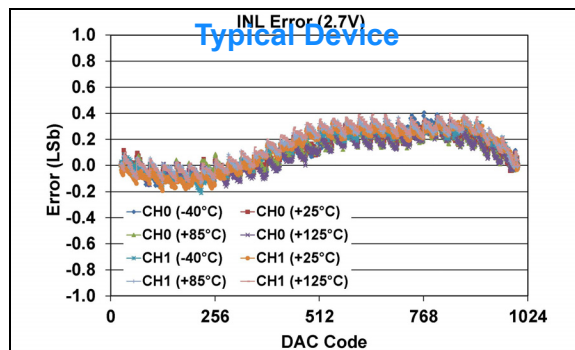


FIGURE 1-366: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - MCP47FXB12)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

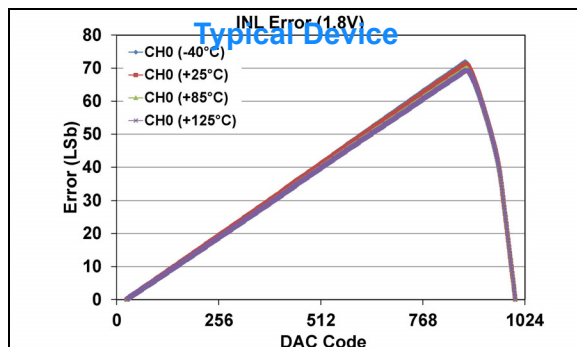


FIGURE 1-364: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - MCP47FXB11)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x))
(see [Appendix B.5](#) for additional information).

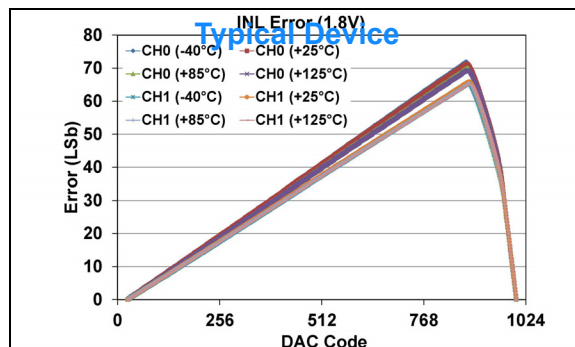


FIGURE 1-367: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - MCP47FXB12)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x))
(see [Appendix B.5](#) for additional information).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 1\text{V}$, $Gx = '1'$ (2x)

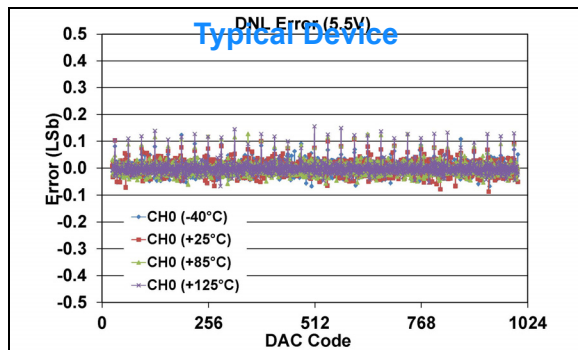


FIGURE 1-368: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000)
(Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

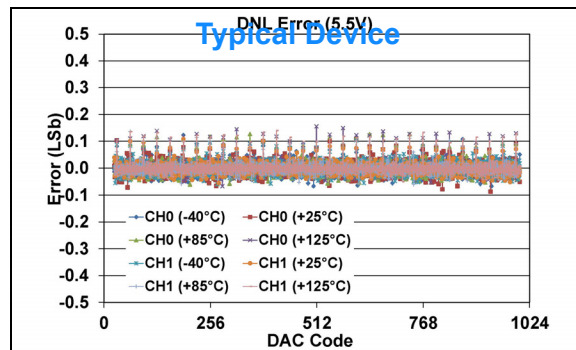


FIGURE 1-371: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000)
(Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

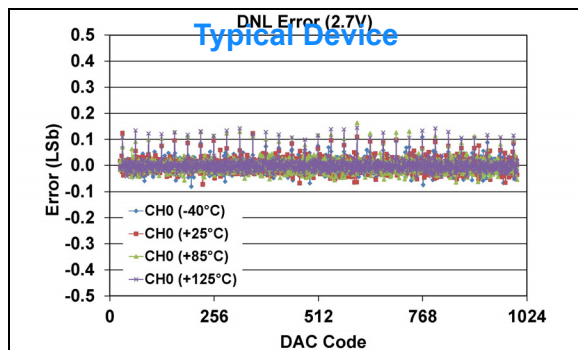


FIGURE 1-369: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000)
(Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

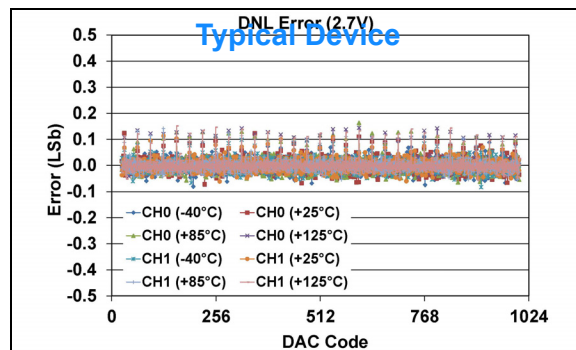


FIGURE 1-372: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000)
(Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

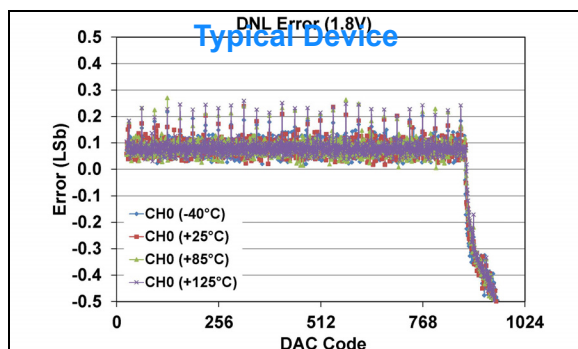


FIGURE 1-370: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000)
(Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x))
(see [Appendix B.5](#) for additional information).

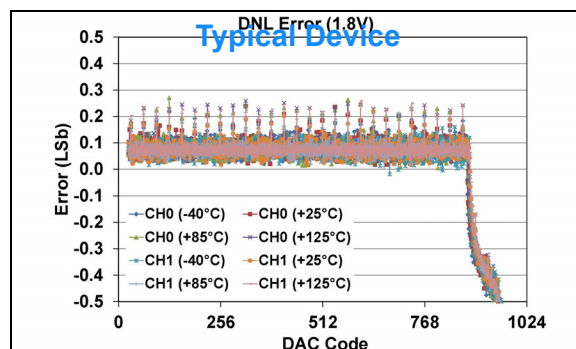


FIGURE 1-373: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000)
(Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x))
(see [Appendix B.5](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 2.048\text{V}$

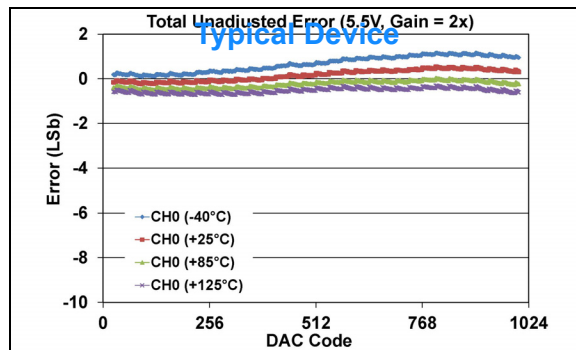


FIGURE 1-374: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

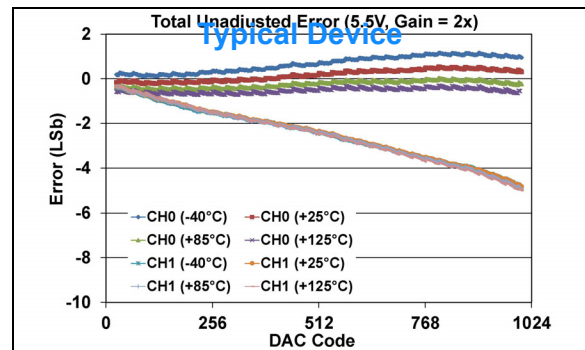


FIGURE 1-377: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

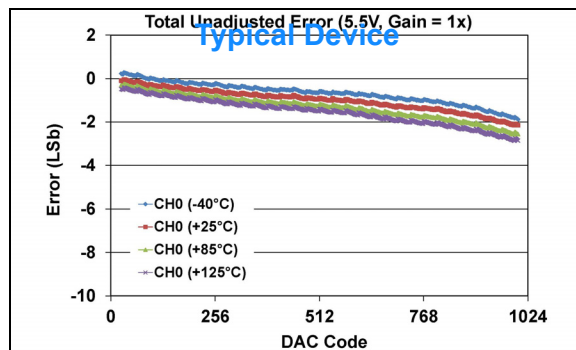


FIGURE 1-375: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

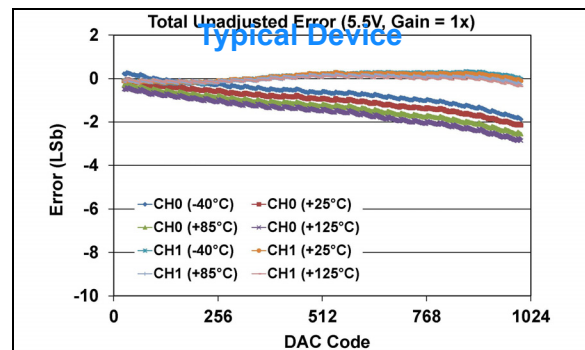


FIGURE 1-378: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

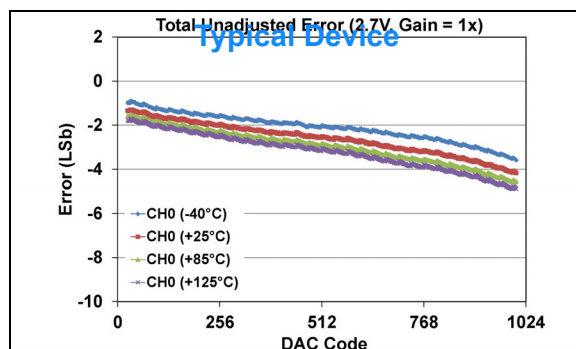


FIGURE 1-376: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

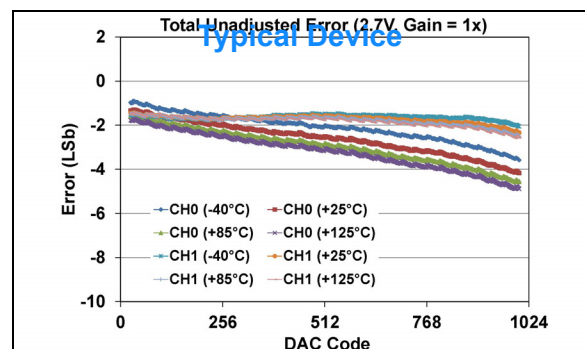


FIGURE 1-379: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 2.048\text{V}$

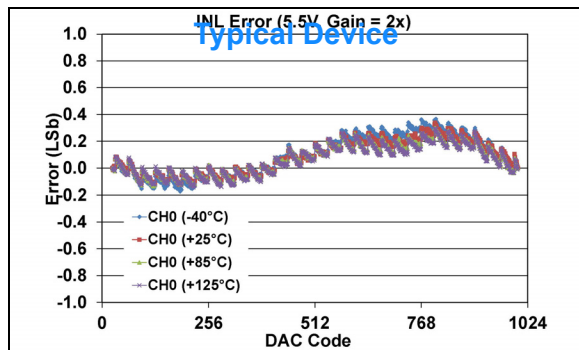


FIGURE 1-380: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

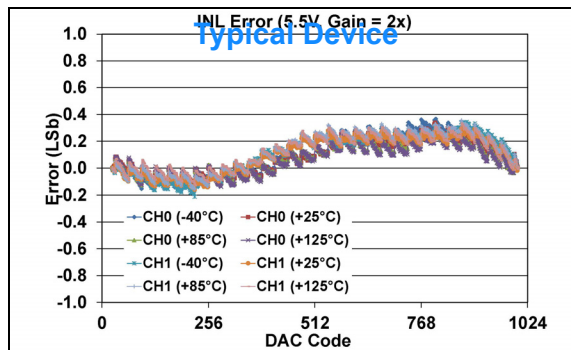


FIGURE 1-383: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

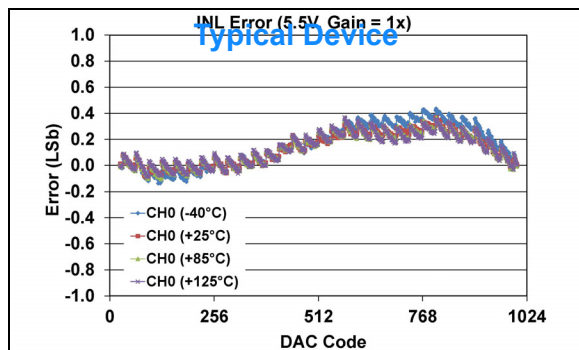


FIGURE 1-381: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

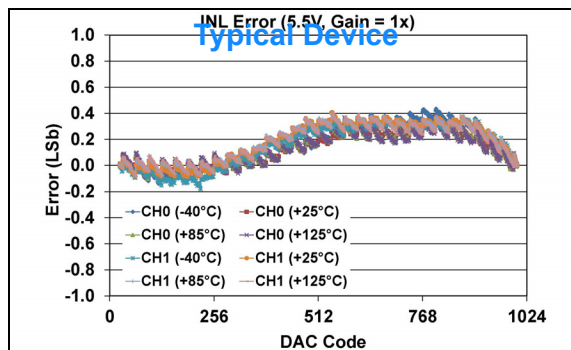


FIGURE 1-384: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(10-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

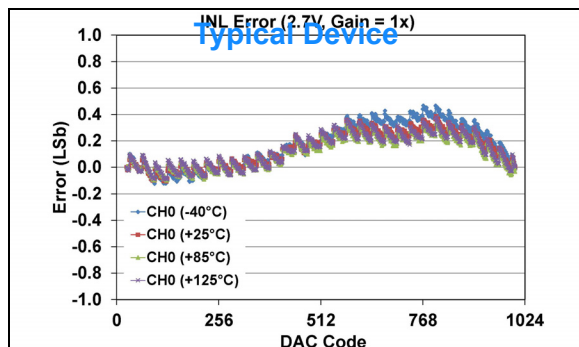


FIGURE 1-382: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(10-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

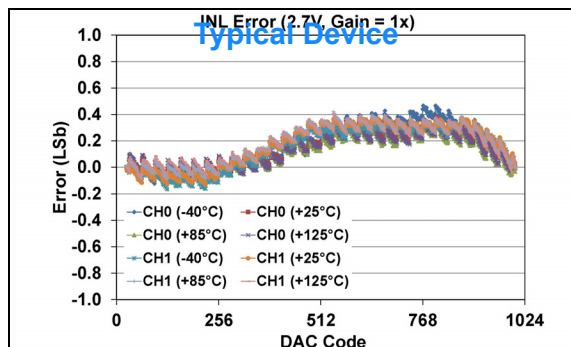


FIGURE 1-385: INL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(10-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

10-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 2.048\text{V}$

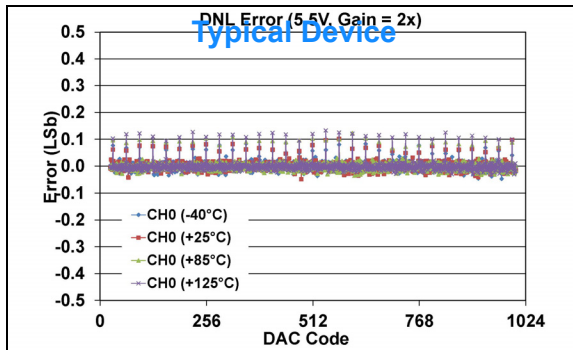


FIGURE 1-386: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $G_x = '1'$ (2x)).

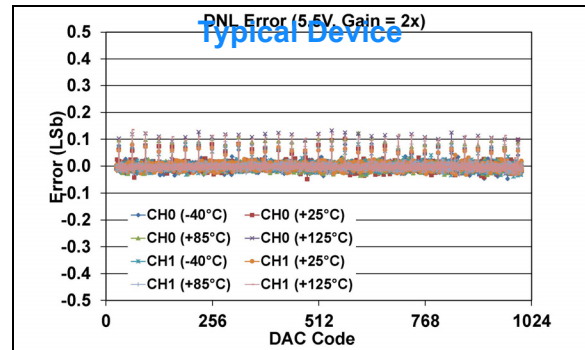


FIGURE 1-389: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $G_x = '1'$ (2x)).

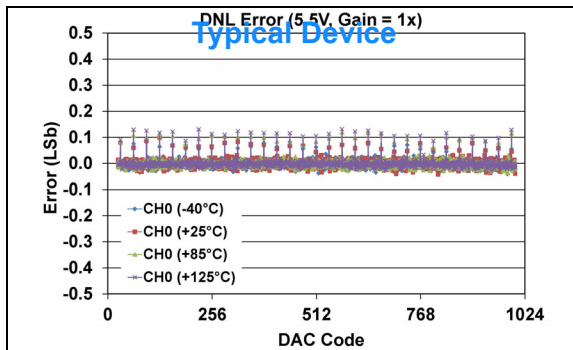


FIGURE 1-387: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $G_x = '0'$ (1x)).

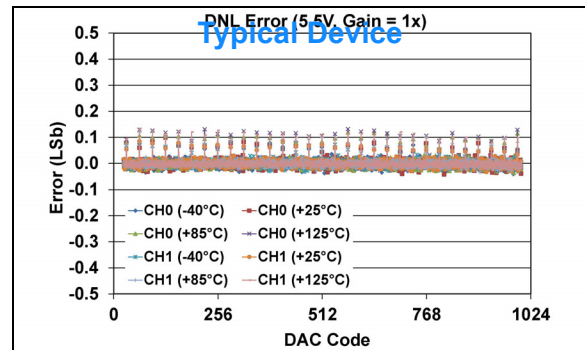


FIGURE 1-390: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $G_x = '0'$ (1x)).

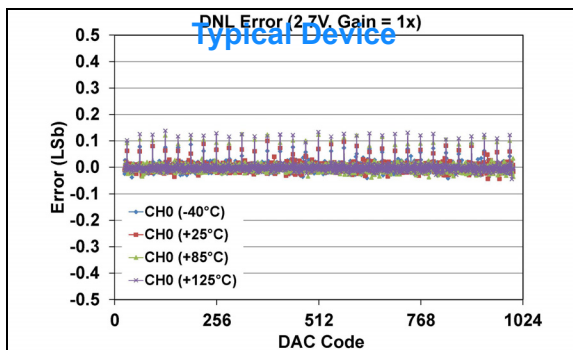


FIGURE 1-388: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Single Channel - **MCP47FXB11**)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $G_x = '0'$ (1x)).

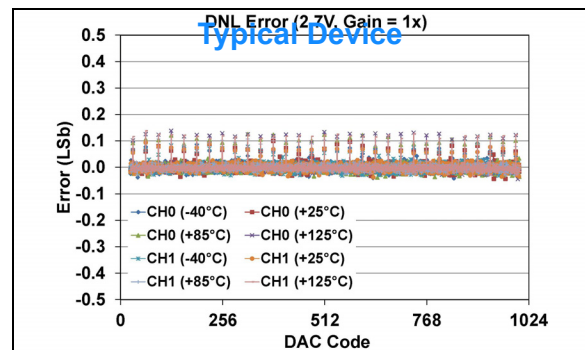


FIGURE 1-391: DNL Error vs. DAC Code, and Temperature (Code 25 - 1000) (Dual Channel - **MCP47FXB12**)
(**10-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $G_x = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '00'$ (V_{DD} Mode), $Gx = '0'$ (1x)

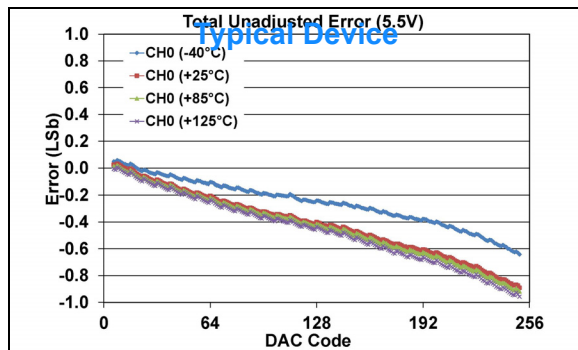


FIGURE 1-392: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

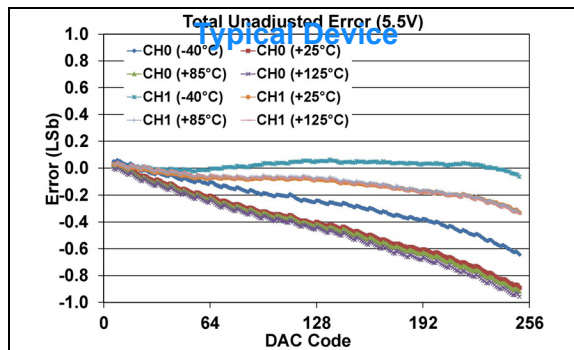


FIGURE 1-395: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

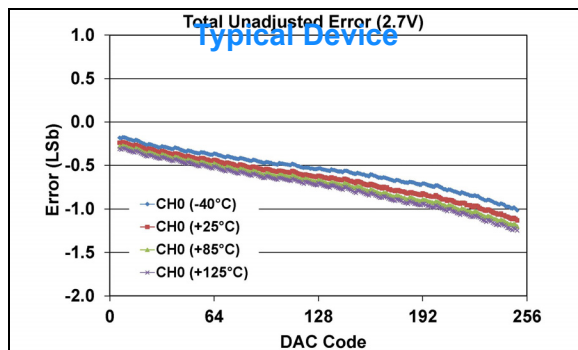


FIGURE 1-393: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

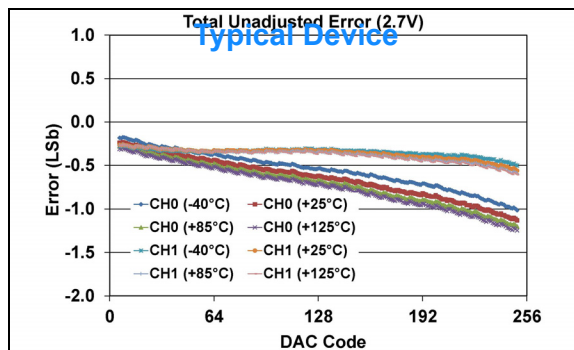


FIGURE 1-396: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

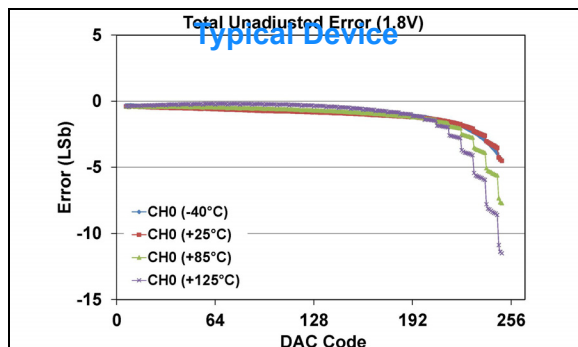


FIGURE 1-394: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x))
(see [Appendix B.1](#) for additional information).

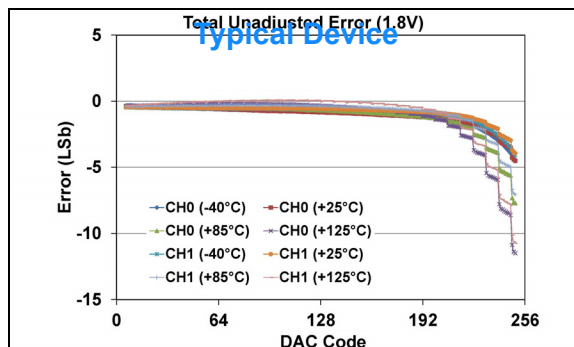


FIGURE 1-397: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x))
(see [Appendix B.1](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '00'$ (V_{DD} Mode), $Gx = '0'$ (1x)

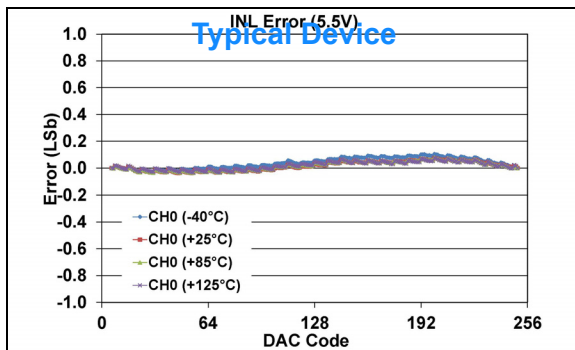


FIGURE 1-398: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

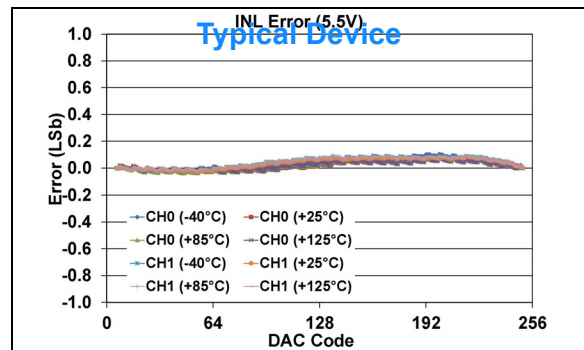


FIGURE 1-401: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

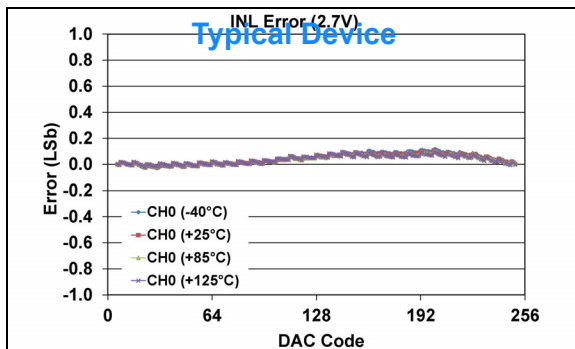


FIGURE 1-399: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

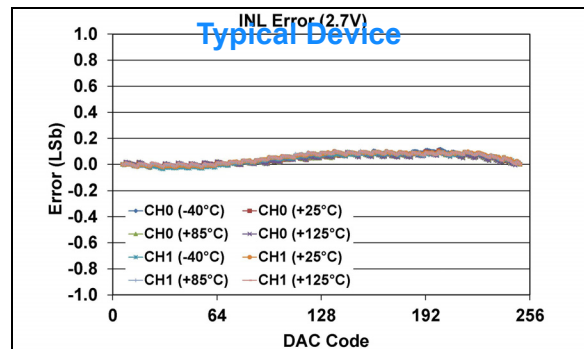


FIGURE 1-402: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

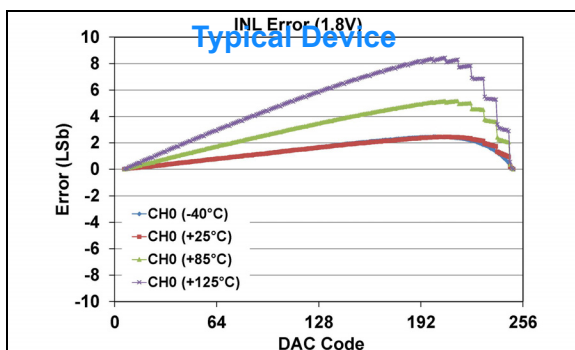


FIGURE 1-400: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x))
(see [Appendix B.1](#) for additional information).

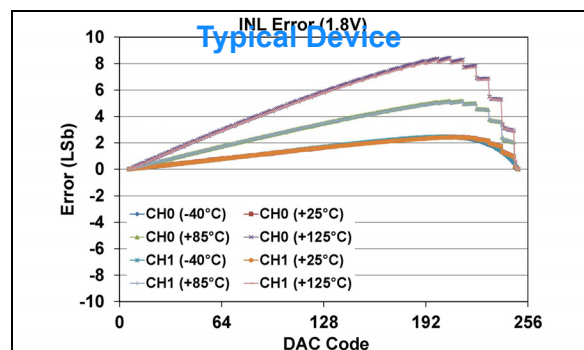


FIGURE 1-403: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x))
(see [Appendix B.1](#) for additional information).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '00'$ (V_{DD} Mode), $Gx = '0'$ (1x)

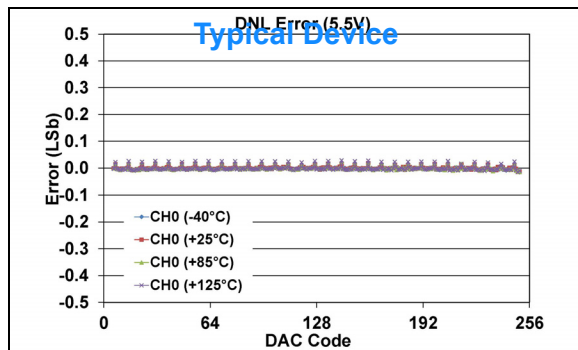


FIGURE 1-404: DNL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(8-bit: $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

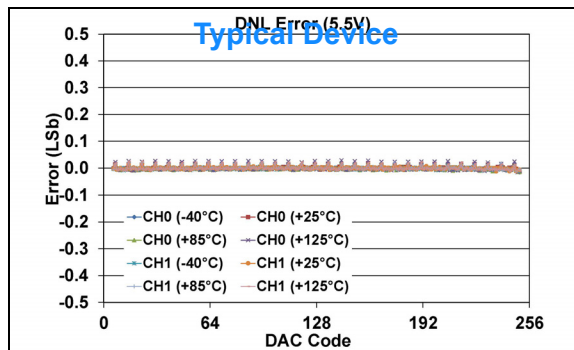


FIGURE 1-407: DNL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(8-bit: $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

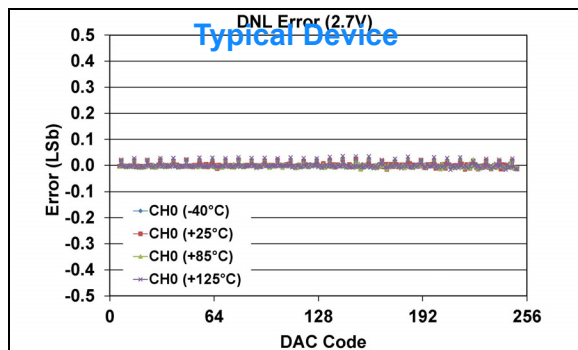


FIGURE 1-405: DNL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(8-bit: $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

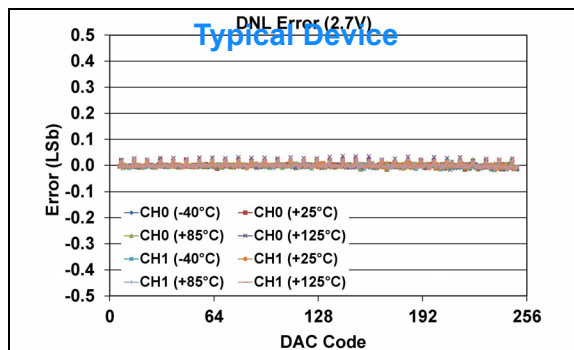


FIGURE 1-408: DNL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(8-bit: $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x)).

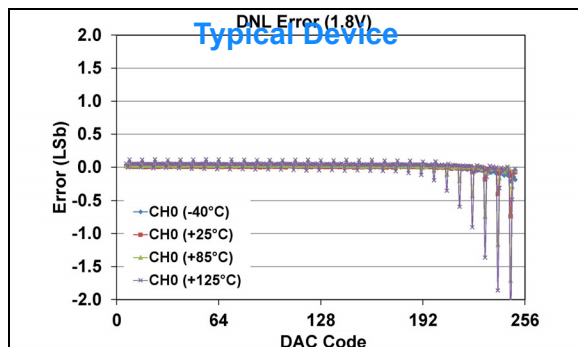


FIGURE 1-406: DNL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(8-bit: $V_{DD} = 1.8\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x))
(see [Appendix B.1](#) for additional information).

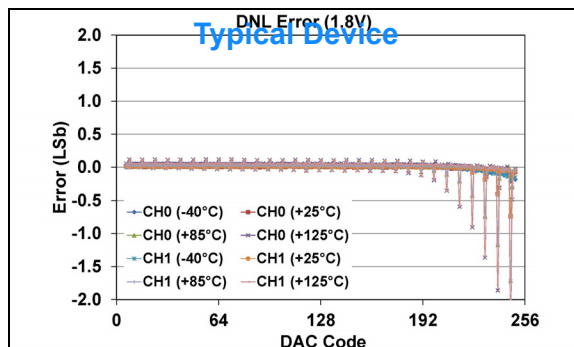


FIGURE 1-409: DNL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(8-bit: $V_{DD} = 1.8\text{V}$, $VRxB:VRxA = '00'$ (V_{DD}), $Gx = '0'$ (1x))
(see [Appendix B.1](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '01'$ (Bandgap Mode)

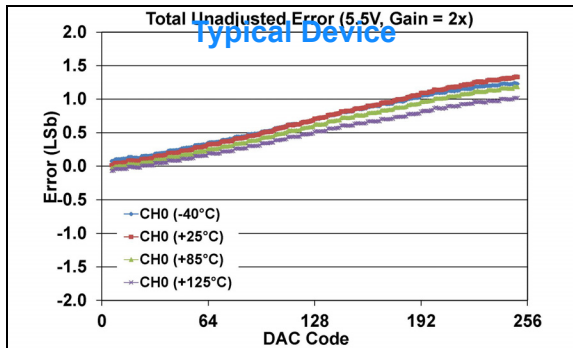


FIGURE 1-410: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $G_x = '1'$ (2x)).

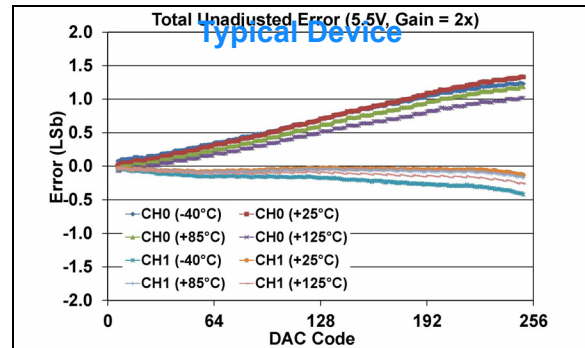


FIGURE 1-413: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $G_x = '1'$ (2x)).

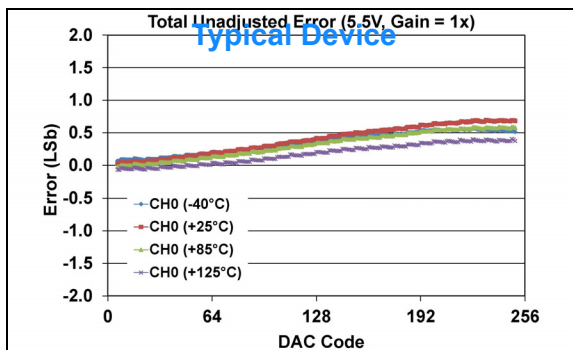


FIGURE 1-411: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $G_x = '0'$ (1x)).

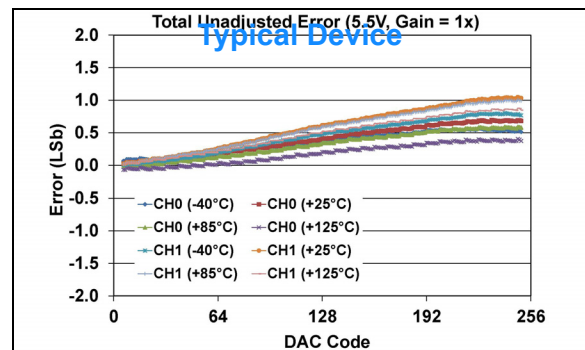


FIGURE 1-414: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $G_x = '0'$ (1x)).

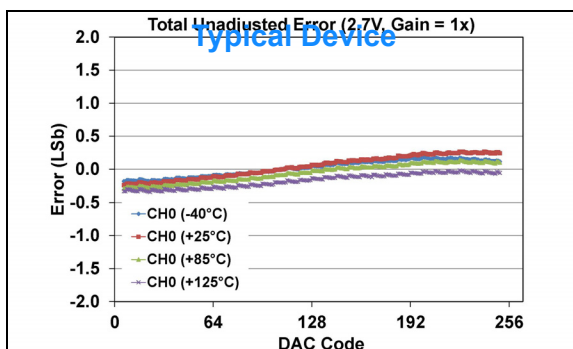


FIGURE 1-412: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $G_x = '0'$ (1x)).

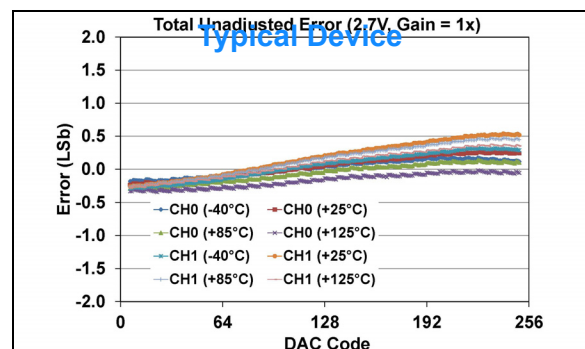


FIGURE 1-415: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $G_x = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '01'$ (Bandgap Mode)

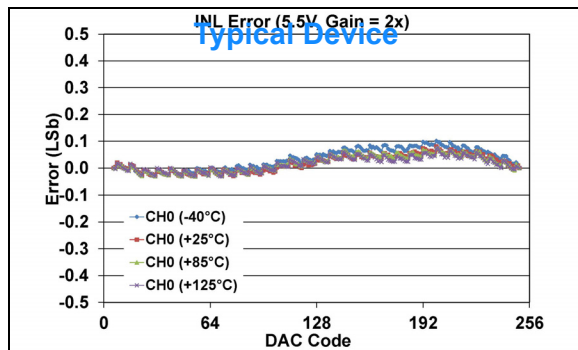


FIGURE 1-416: INL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(8-bit: $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $Gx = '1'$ (2x)).

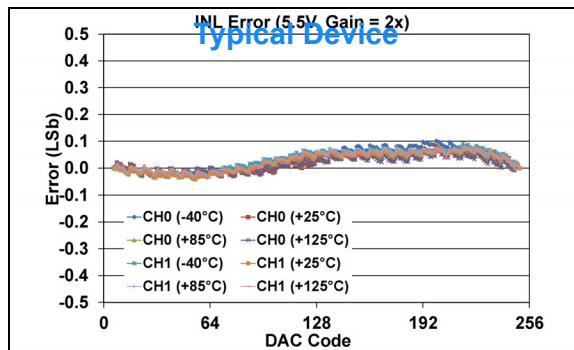


FIGURE 1-419: INL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(8-bit: $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $Gx = '1'$ (2x)).

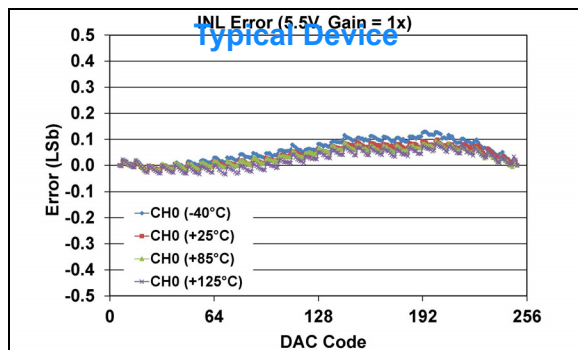


FIGURE 1-417: INL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(8-bit: $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $Gx = '0'$ (1x)).

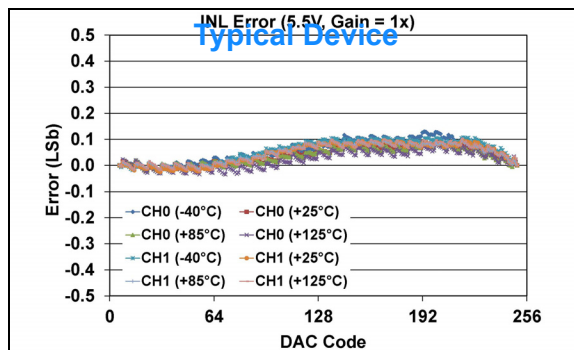


FIGURE 1-420: INL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(8-bit: $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $Gx = '0'$ (1x)).

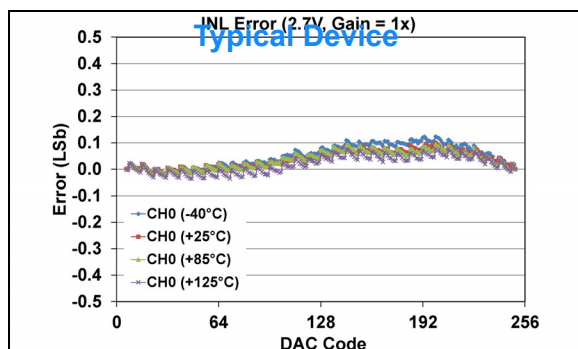


FIGURE 1-418: INL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(8-bit: $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $Gx = '0'$ (1x)).

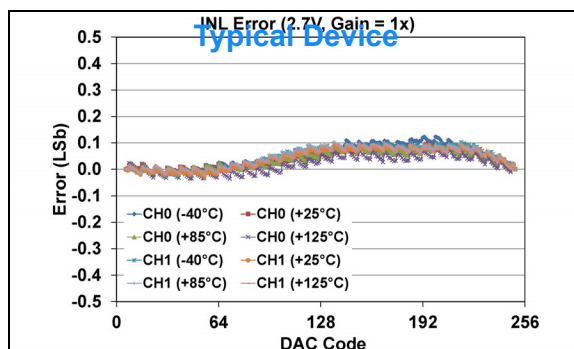


FIGURE 1-421: INL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(8-bit: $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $Gx = '0'$ (1x)).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '01'$ (Bandgap Mode)

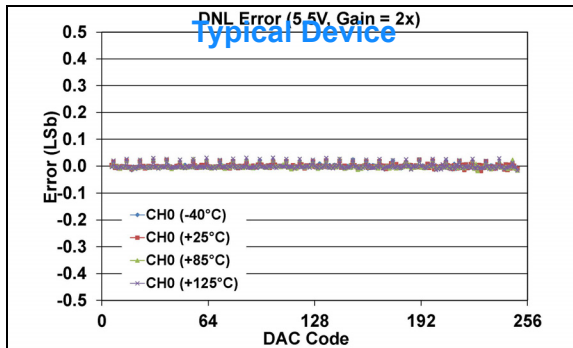


FIGURE 1-422: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $G_x = '1'$ (2x)).

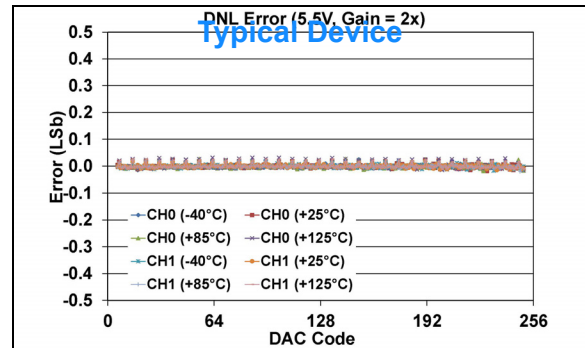


FIGURE 1-425: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $G_x = '1'$ (2x)).

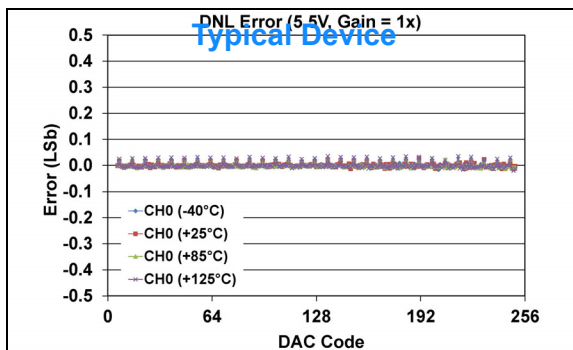


FIGURE 1-423: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $G_x = '0'$ (1x)).

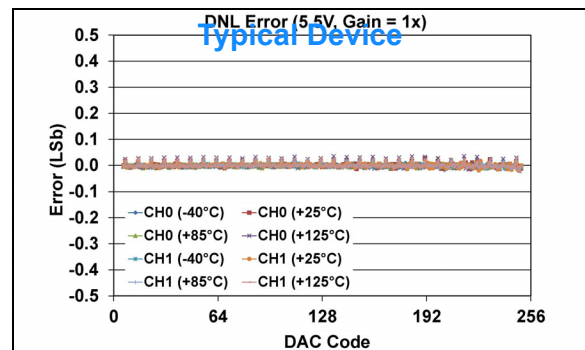


FIGURE 1-426: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $G_x = '0'$ (1x)).

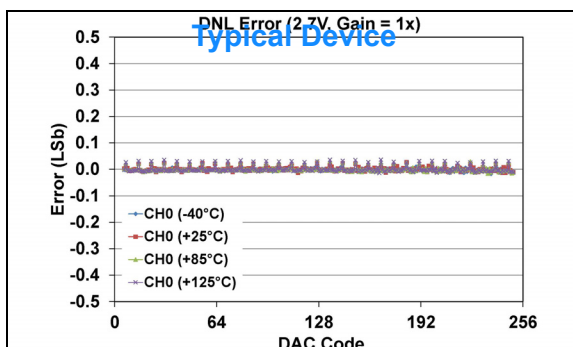


FIGURE 1-424: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $G_x = '0'$ (1x)).

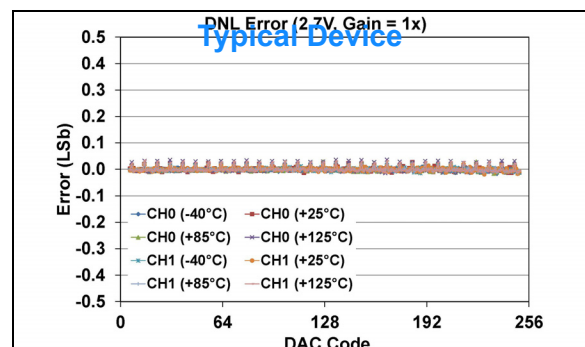


FIGURE 1-427: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $VRxB:VRxA = '01'$ (Bandgap), $G_x = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = V_{DD}$, $Gx = '0'$ (1x)

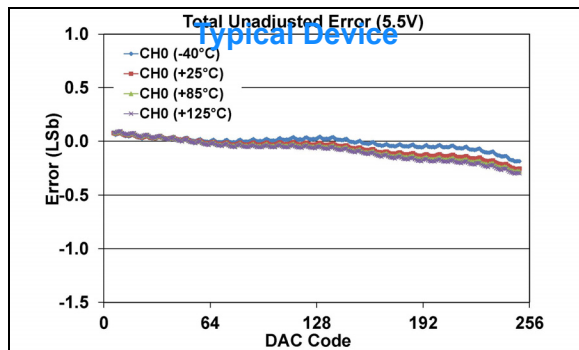


FIGURE 1-428: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

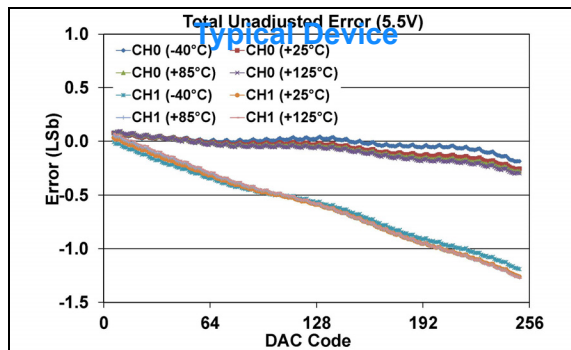


FIGURE 1-431: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

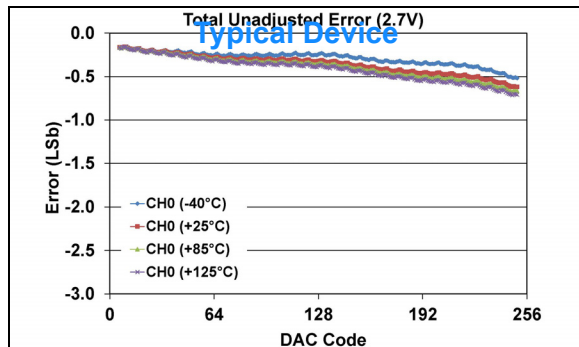


FIGURE 1-429: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

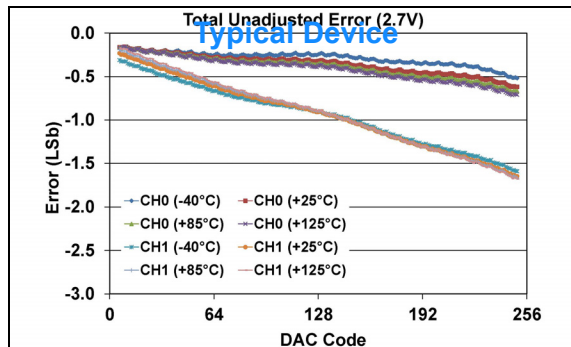


FIGURE 1-432: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

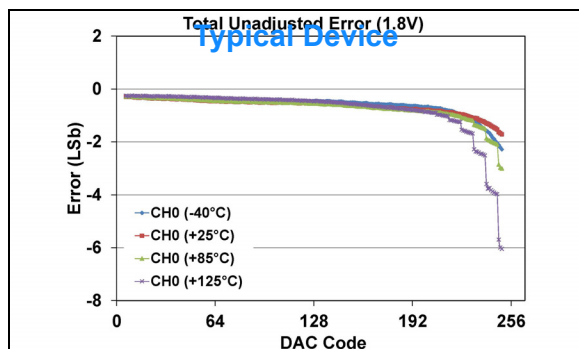


FIGURE 1-430: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x))
(see [Appendix B.2](#) for additional information).

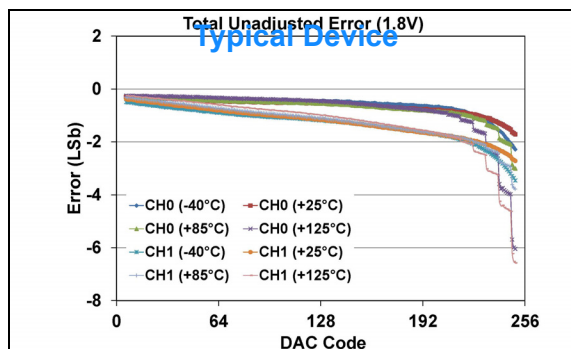


FIGURE 1-433: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x))
(see [Appendix B.2](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = V_{DD}$, $Gx = '0'$ (1x)

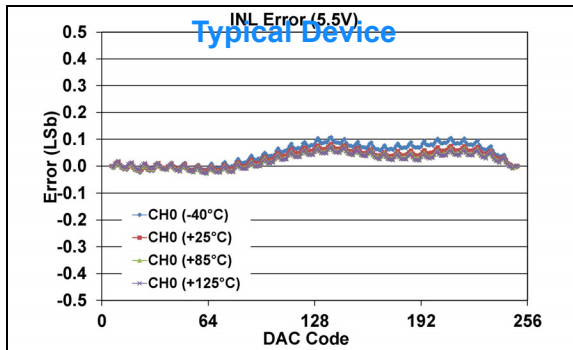


FIGURE 1-434: INL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

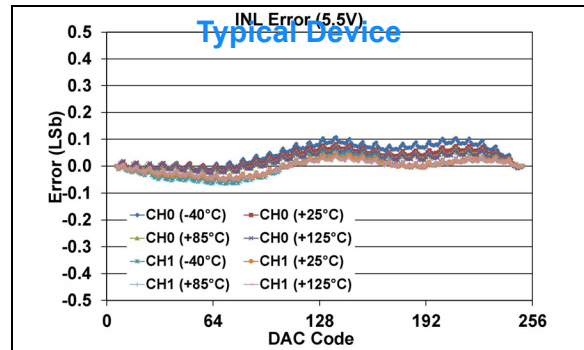


FIGURE 1-437: INL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

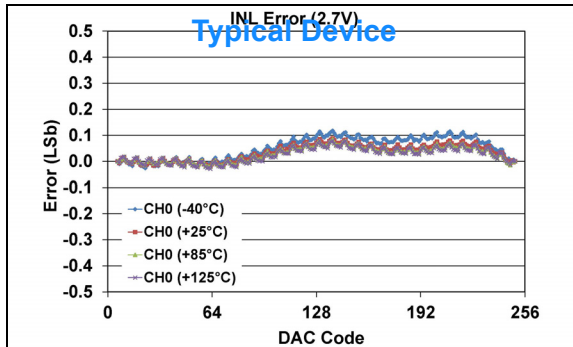


FIGURE 1-435: INL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

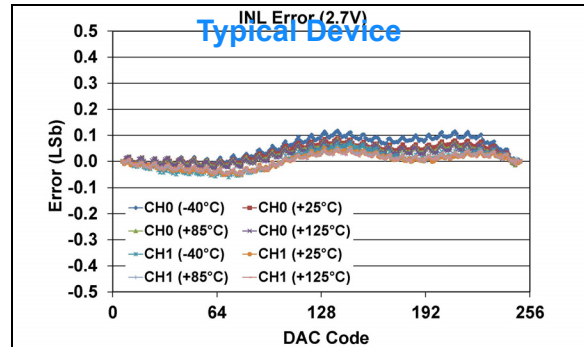


FIGURE 1-438: INL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

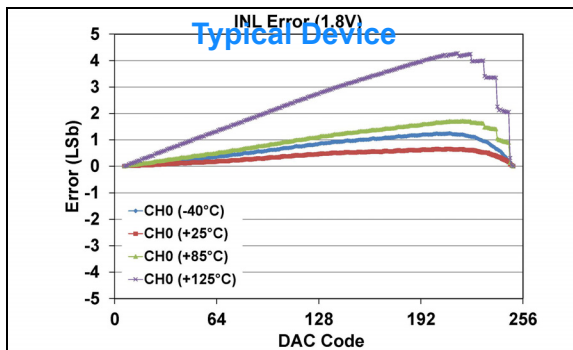


FIGURE 1-436: INL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x))
(see [Appendix B.2](#) for additional information).

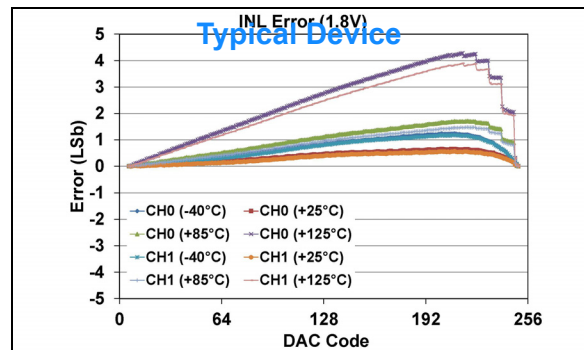


FIGURE 1-439: INL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x))
(see [Appendix B.2](#) for additional information).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = V_{DD}$, $Gx = '0'$ (1x)

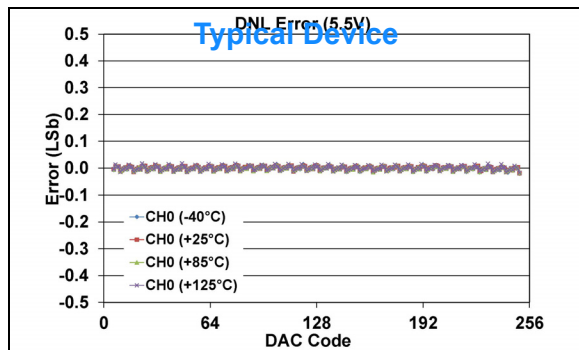


FIGURE 1-440: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

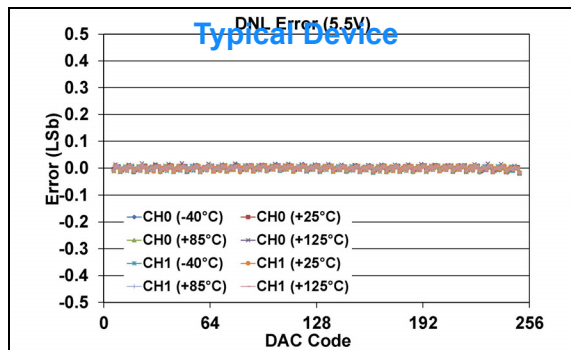


FIGURE 1-443: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

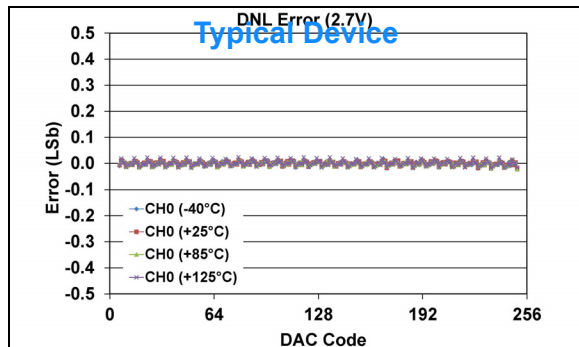


FIGURE 1-441: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

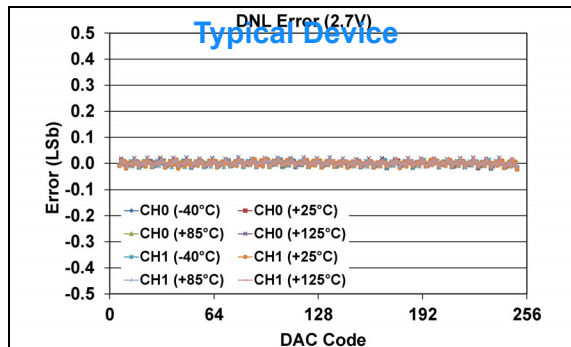


FIGURE 1-444: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

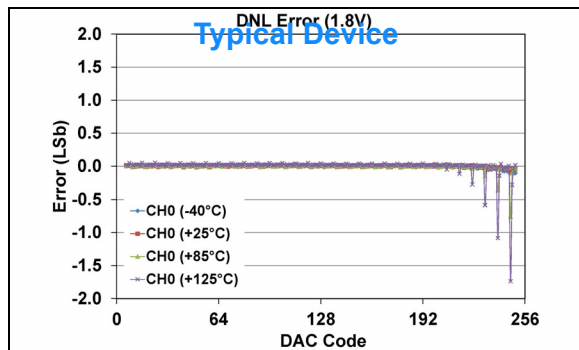


FIGURE 1-442: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x))
(see [Appendix B.2](#) for additional information).

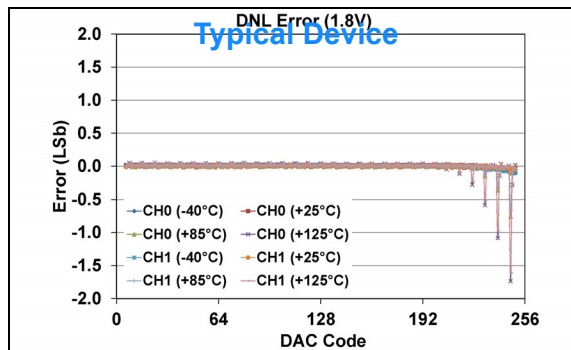


FIGURE 1-445: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x))
(see [Appendix B.2](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 1\text{V}$, $Gx = '0'$ (1x)

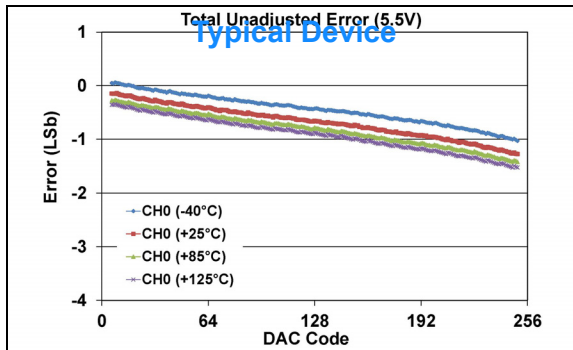


FIGURE 1-446: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB01)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

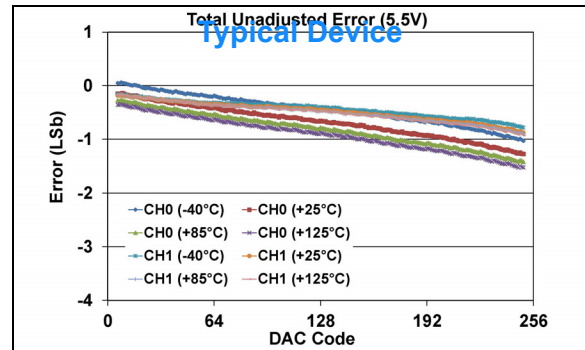


FIGURE 1-449: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB02)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

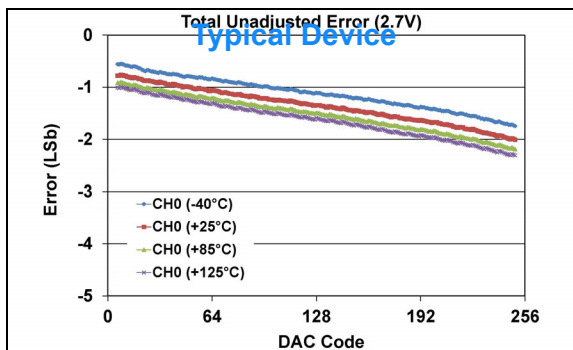


FIGURE 1-447: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB01)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

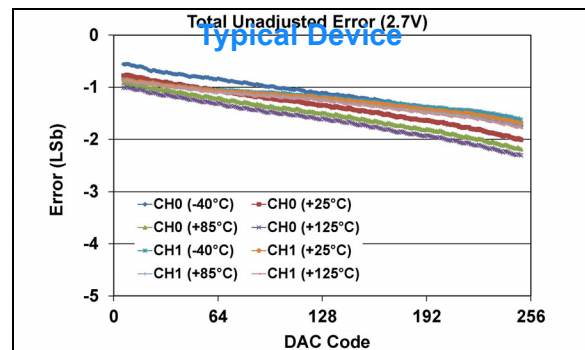


FIGURE 1-450: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB02)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

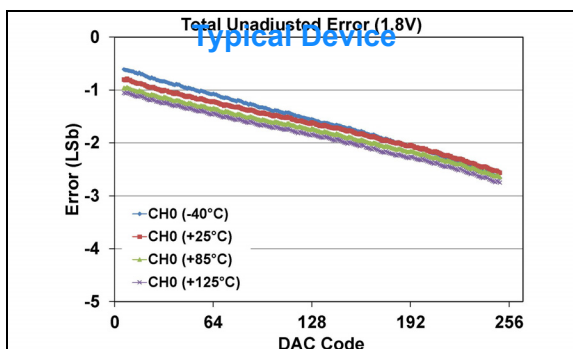


FIGURE 1-448: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB01)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

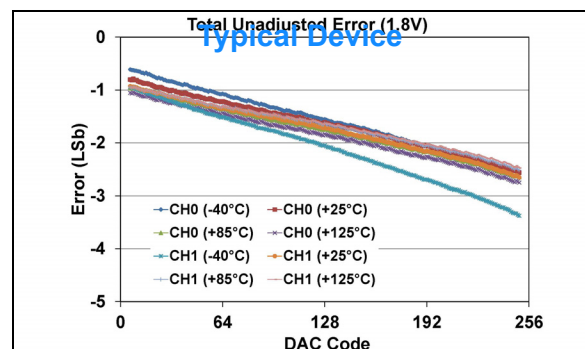


FIGURE 1-451: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB02)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 1\text{V}$, $Gx = '0'$ (1x)

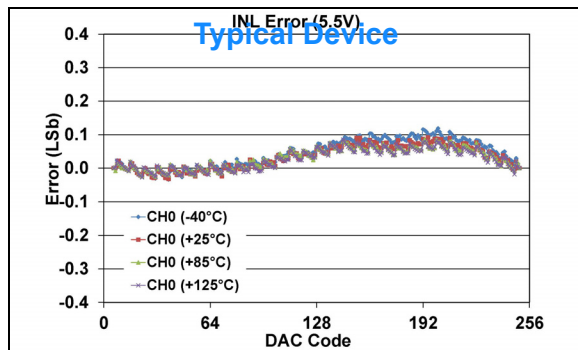


FIGURE 1-452: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

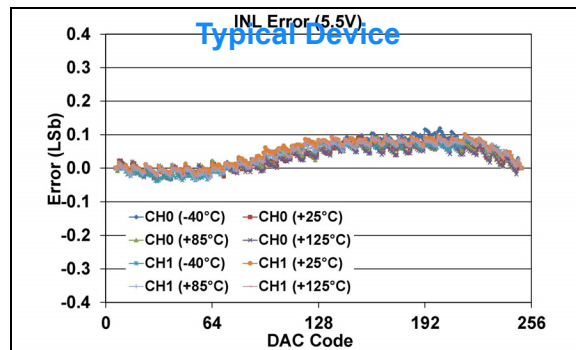


FIGURE 1-455: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

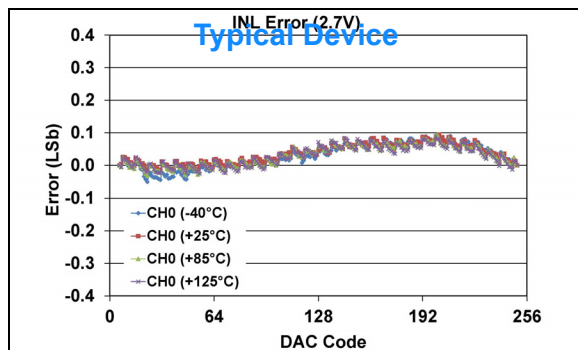


FIGURE 1-453: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

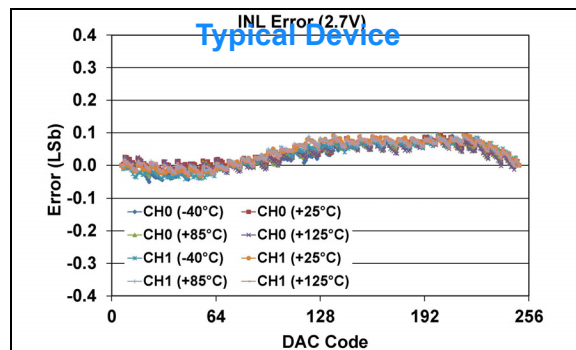


FIGURE 1-456: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

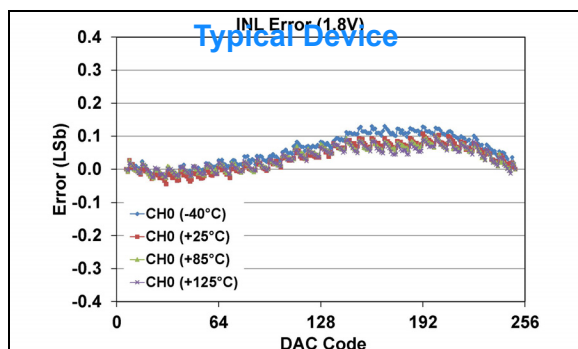


FIGURE 1-454: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

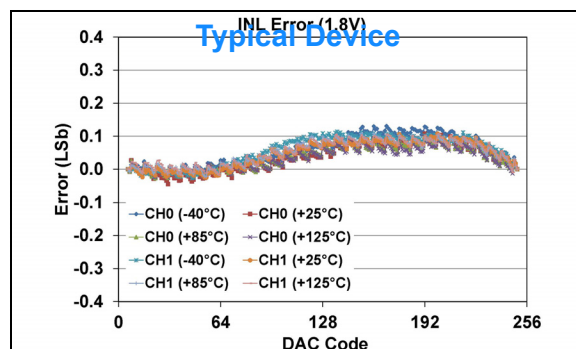


FIGURE 1-457: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 1\text{V}$, $Gx = '0'$ (1x)

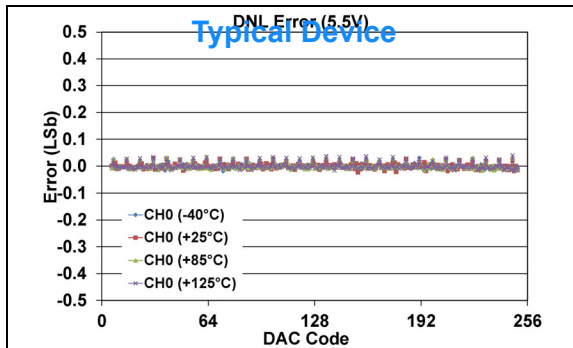


FIGURE 1-458: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

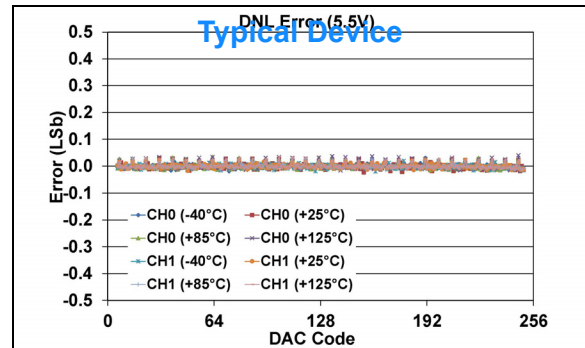


FIGURE 1-461: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

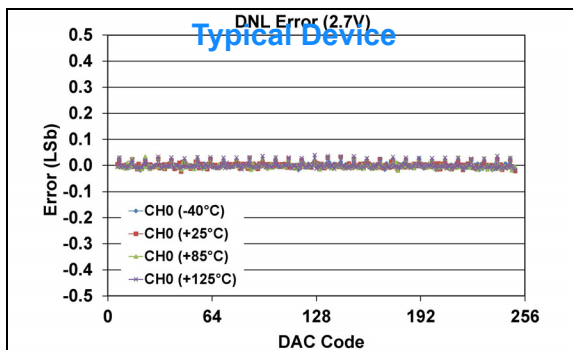


FIGURE 1-459: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

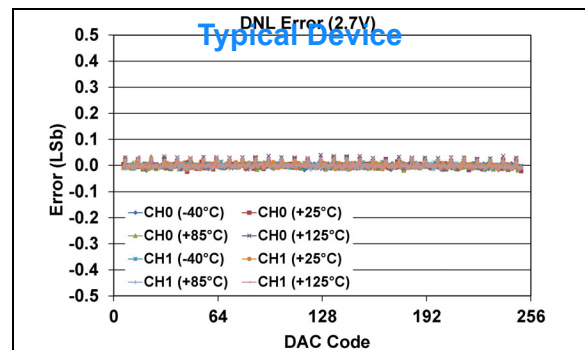


FIGURE 1-462: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

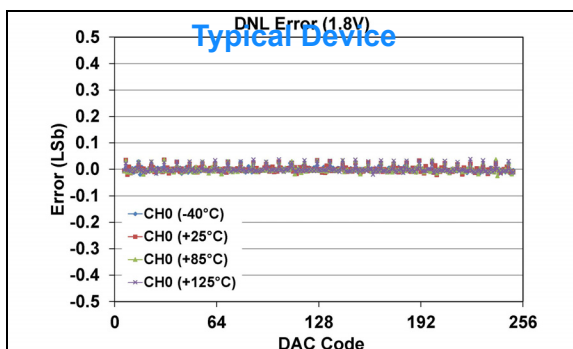


FIGURE 1-460: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

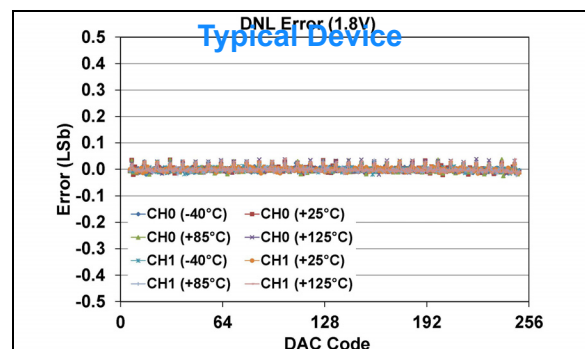


FIGURE 1-463: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 1\text{V}$, $Gx = '1'$ (2x)

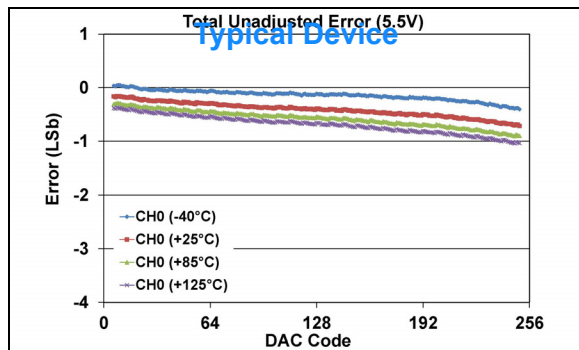


FIGURE 1-464: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

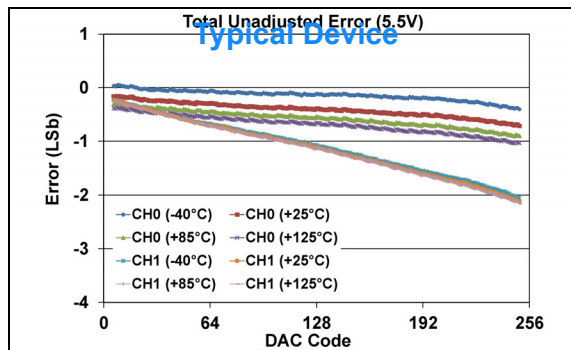


FIGURE 1-467: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

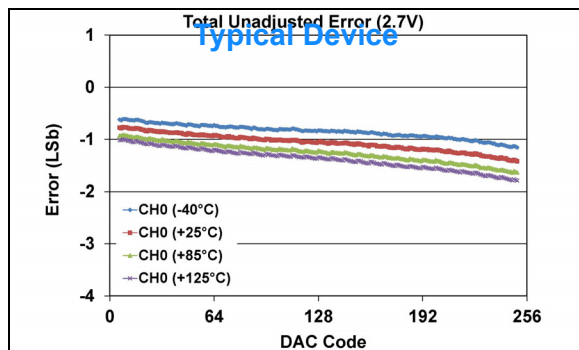


FIGURE 1-465: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

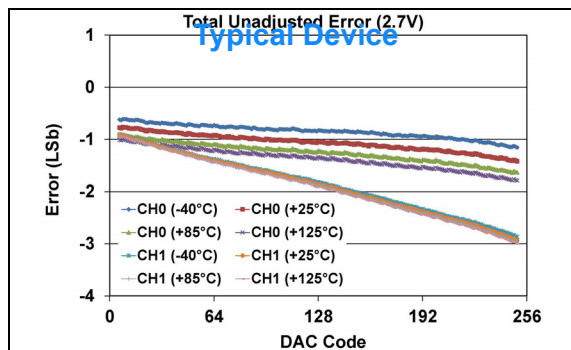


FIGURE 1-468: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

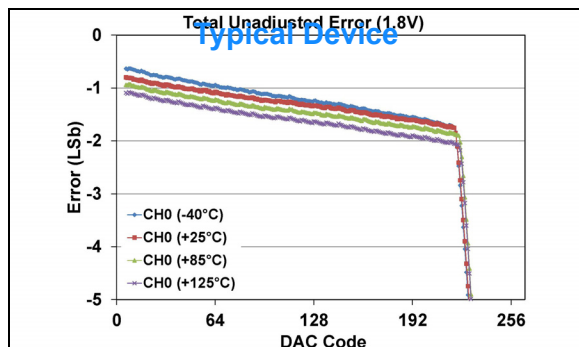


FIGURE 1-466: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x))
(see [Appendix B.3](#) for additional information).

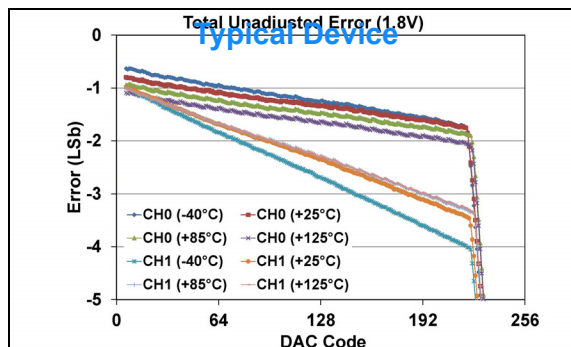


FIGURE 1-469: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x))
(see [Appendix B.3](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 1\text{V}$, $Gx = '1'$ (2x)

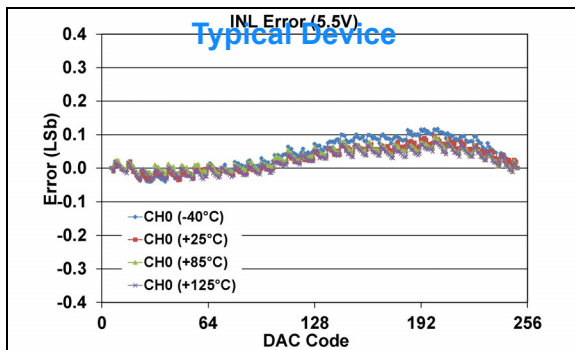


FIGURE 1-470: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

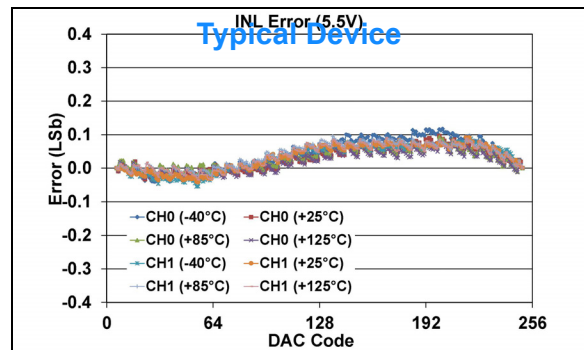


FIGURE 1-473: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

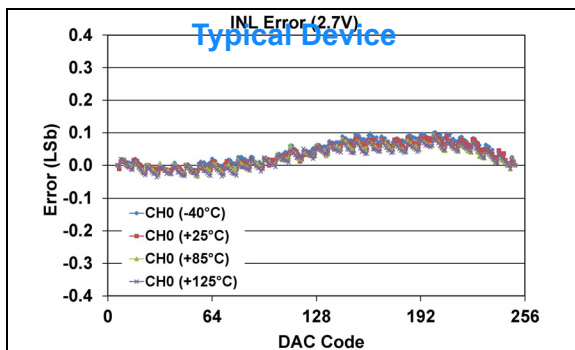


FIGURE 1-471: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

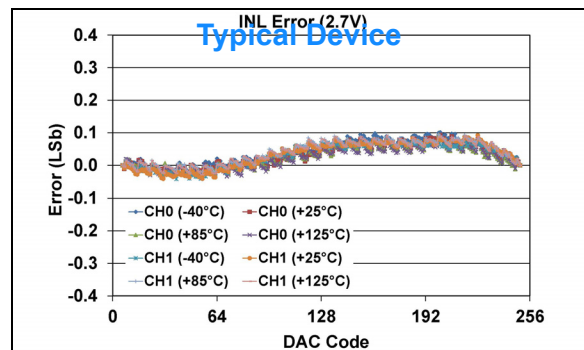


FIGURE 1-474: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

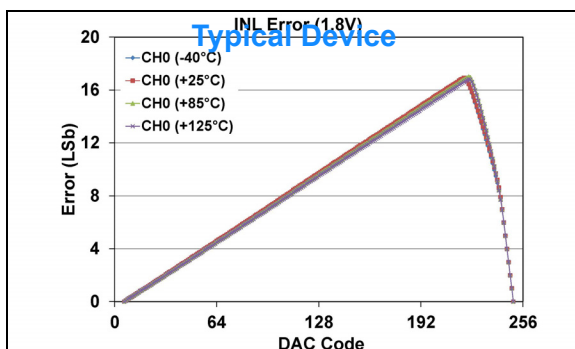


FIGURE 1-472: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x))
(see [Appendix B.3](#) for additional information).

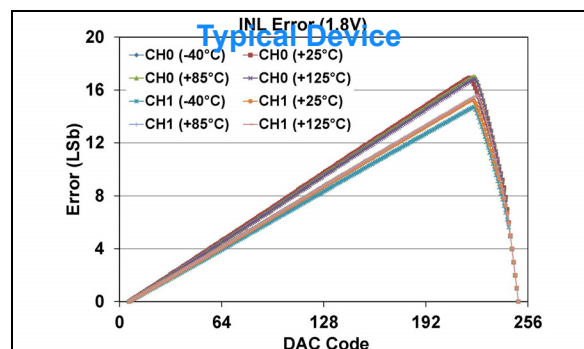


FIGURE 1-475: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x))
(see [Appendix B.3](#) for additional information).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 1\text{V}$, $Gx = '1'$ (2x)

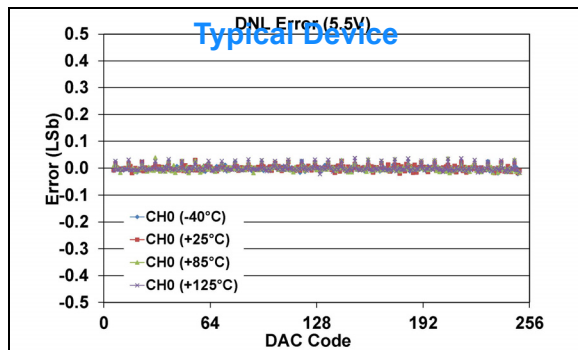


FIGURE 1-476: DNL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

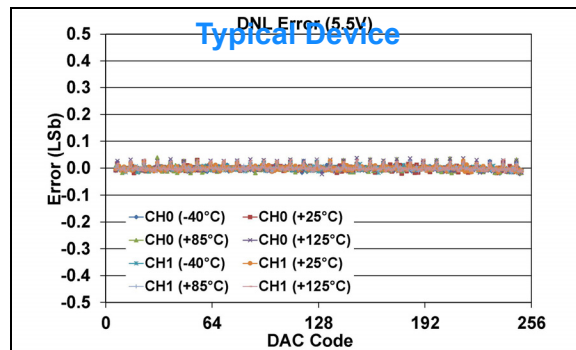


FIGURE 1-479: DNL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

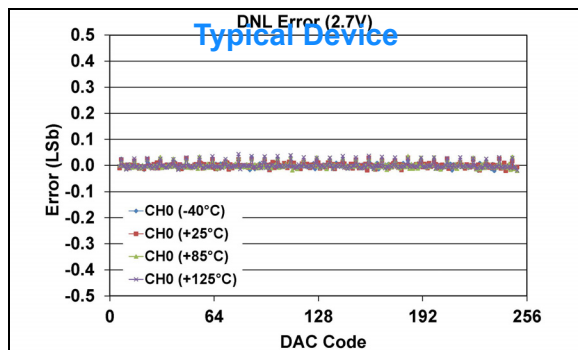


FIGURE 1-477: DNL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

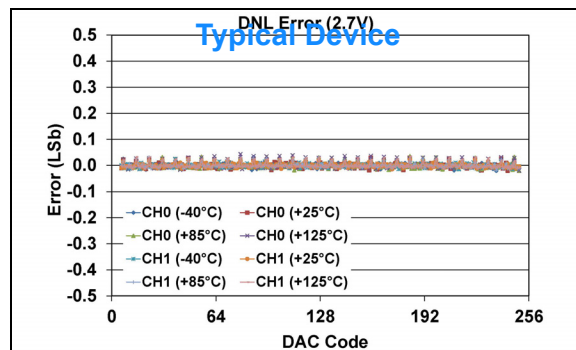


FIGURE 1-480: DNL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

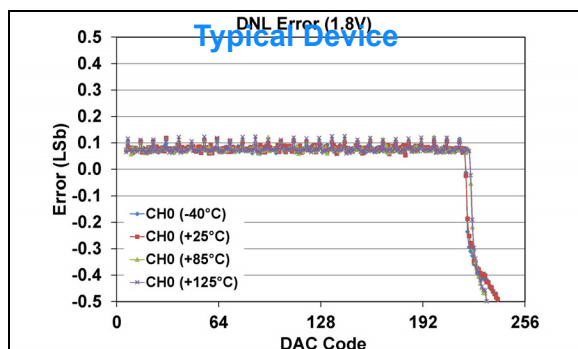


FIGURE 1-478: DNL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x))
(see [Appendix B.3](#) for additional information).

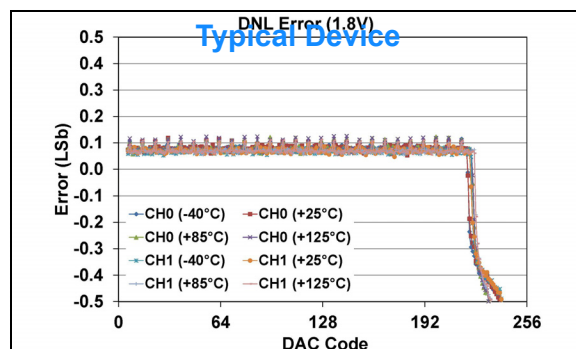


FIGURE 1-481: DNL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x))
(see [Appendix B.3](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 2.048\text{V}$

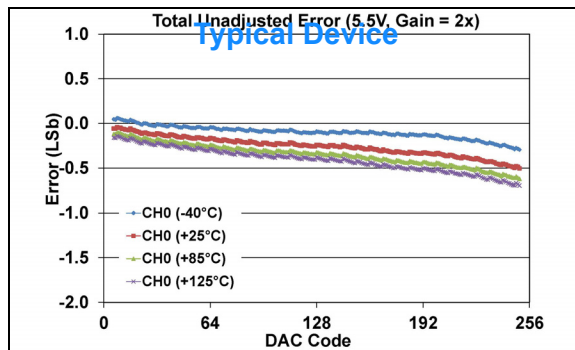


FIGURE 1-482: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

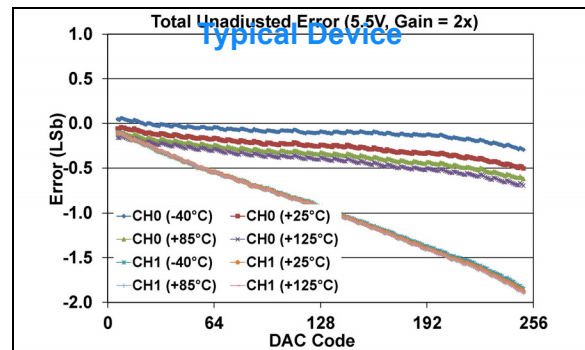


FIGURE 1-485: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

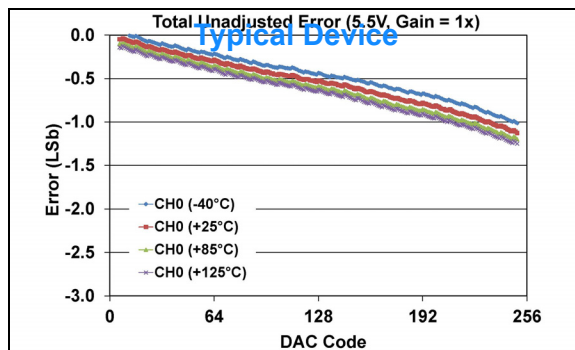


FIGURE 1-483: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

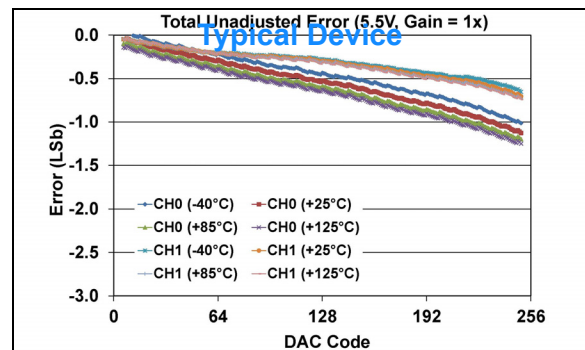


FIGURE 1-486: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

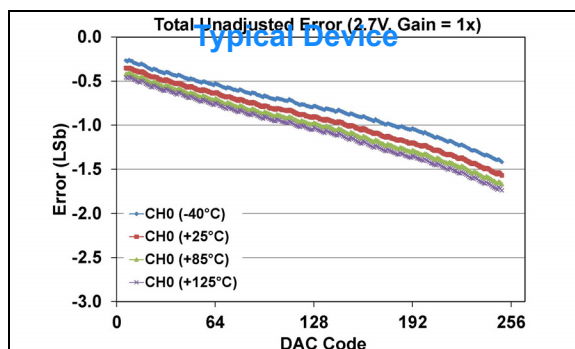


FIGURE 1-484: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

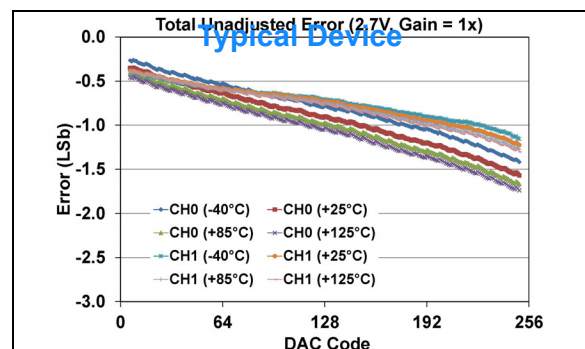


FIGURE 1-487: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 2.048\text{V}$

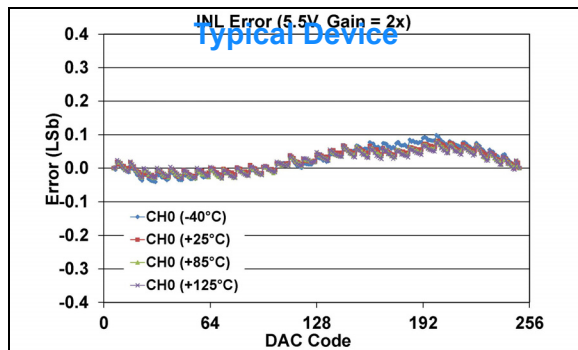


FIGURE 1-488: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $G_x = '1'$ (2x)).

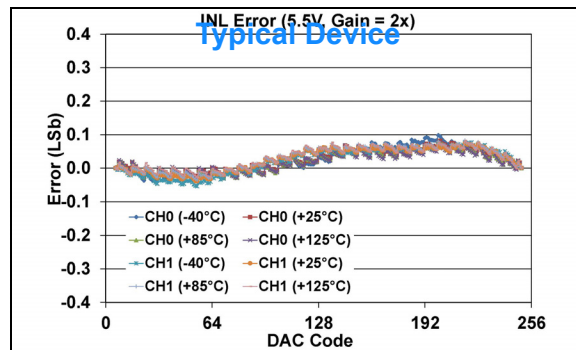


FIGURE 1-491: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $G_x = '1'$ (2x)).

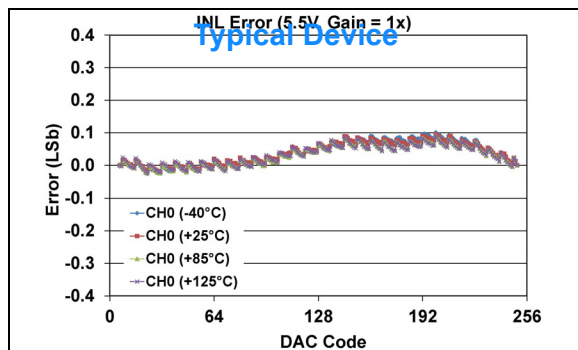


FIGURE 1-489: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $G_x = '0'$ (1x)).

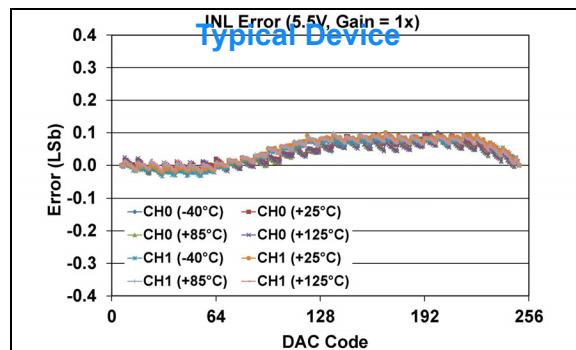


FIGURE 1-492: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $G_x = '0'$ (1x)).

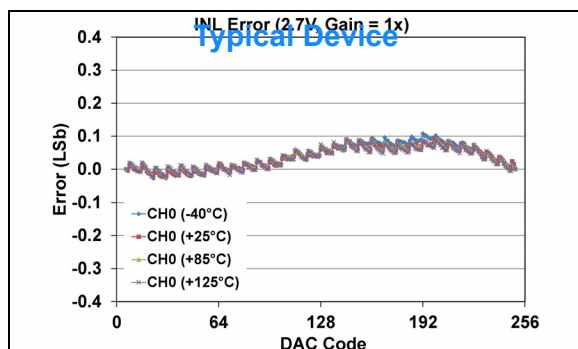


FIGURE 1-490: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $G_x = '0'$ (1x)).

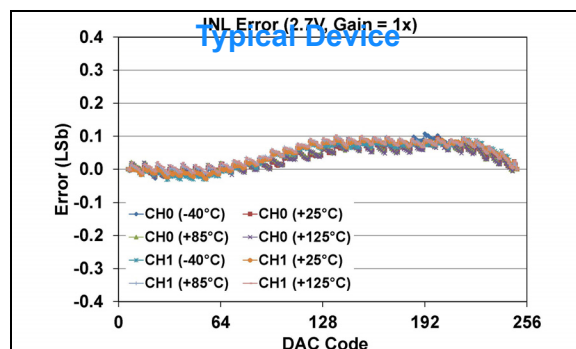


FIGURE 1-493: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $G_x = '0'$ (1x)).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '10'$ (V_{REF} Unbuffered Mode), $V_{REF} = 2.048\text{V}$

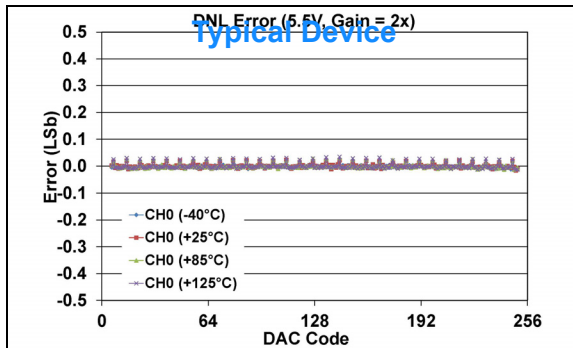


FIGURE 1-494: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

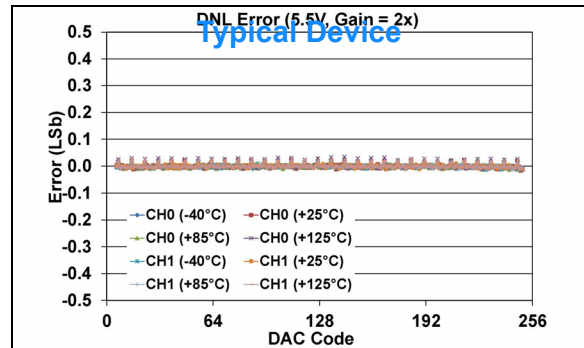


FIGURE 1-497: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '1'$ (2x)).

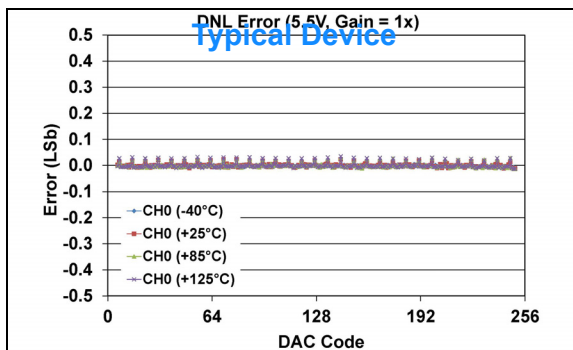


FIGURE 1-495: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

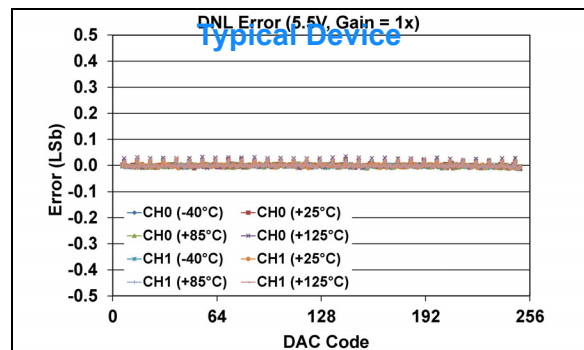


FIGURE 1-498: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

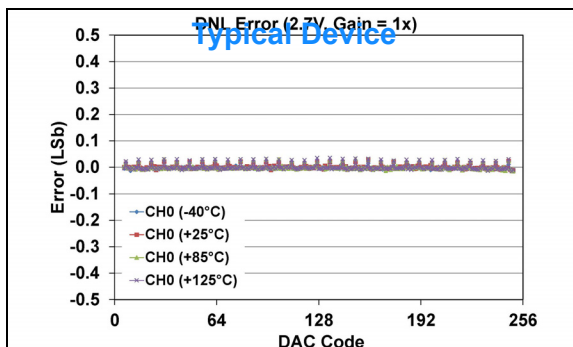


FIGURE 1-496: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

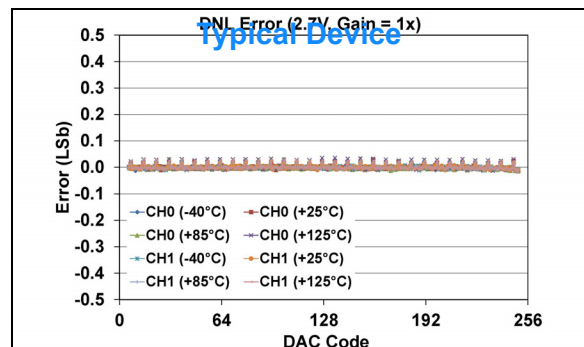


FIGURE 1-499: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '10'$ (V_{REF} Unbuffered), $Gx = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = V_{DD}$, $Gx = '0'$ (1x)

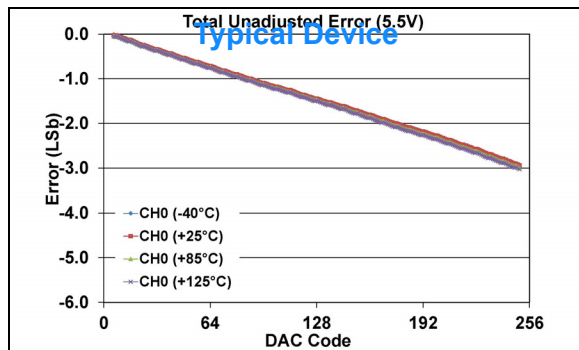


FIGURE 1-500: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

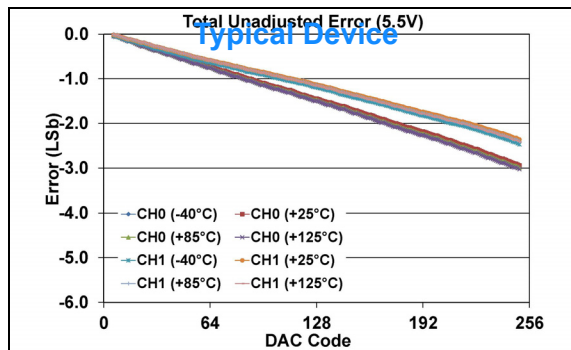


FIGURE 1-503: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

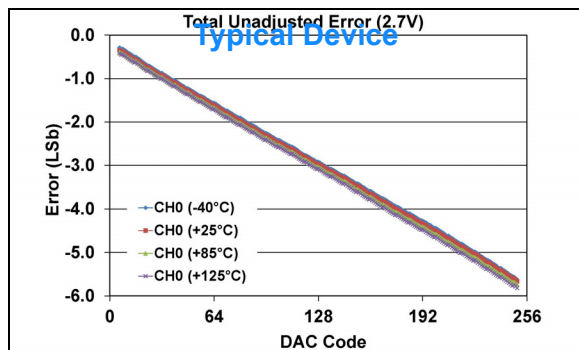


FIGURE 1-501: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

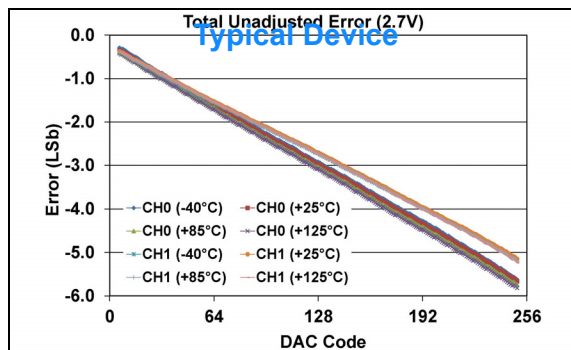


FIGURE 1-504: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

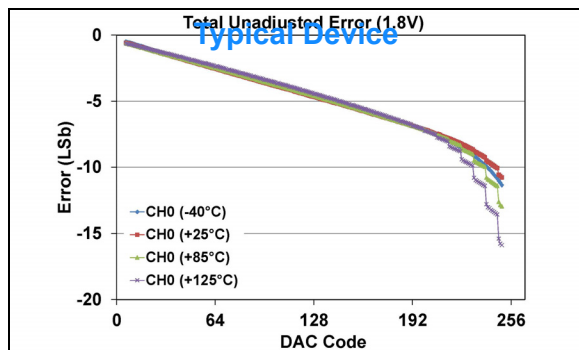


FIGURE 1-502: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x))
(see [Appendix B.4](#) for additional information).

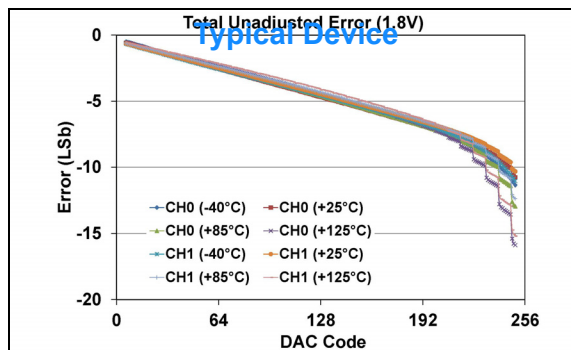


FIGURE 1-505: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x))
(see [Appendix B.4](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = V_{DD}$, $Gx = '0'$ (1x)

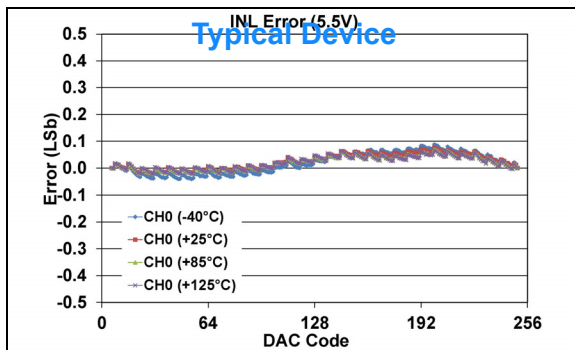


FIGURE 1-506: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - MCP47FXB01)
(8-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

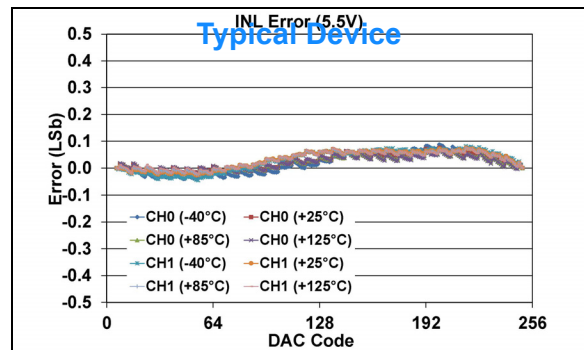


FIGURE 1-509: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - MCP47FXB02)
(8-bit: $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

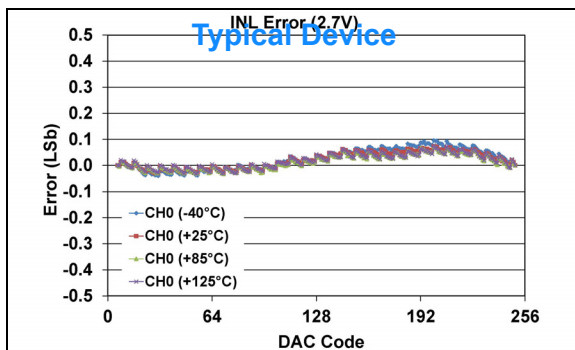


FIGURE 1-507: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - MCP47FXB01)
(8-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

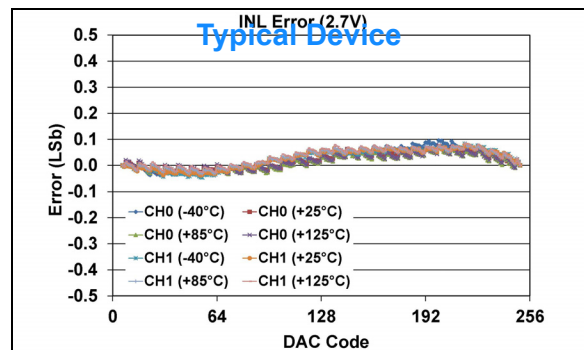


FIGURE 1-510: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - MCP47FXB02)
(8-bit: $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

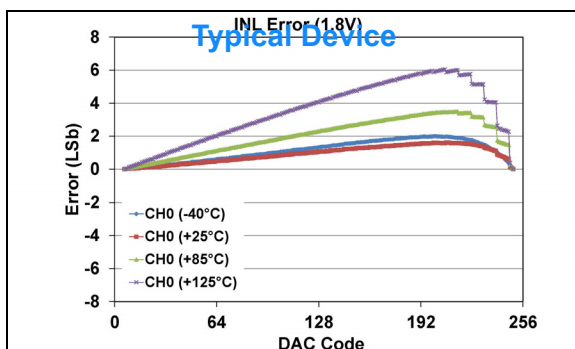


FIGURE 1-508: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - MCP47FXB01)
(8-bit: $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x))
(see [Appendix B.4](#) for additional information).

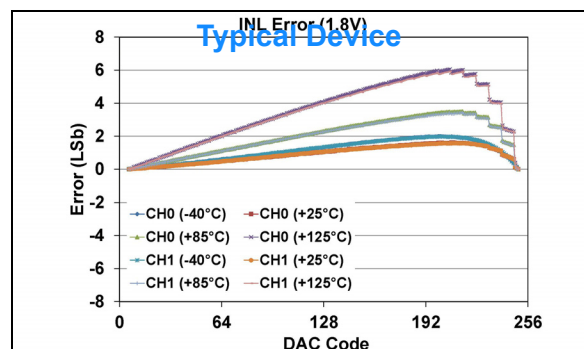


FIGURE 1-511: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - MCP47FXB02)
(8-bit: $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x))
(see [Appendix B.4](#) for additional information).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = V_{DD}$, $Gx = '0'$ (1x)

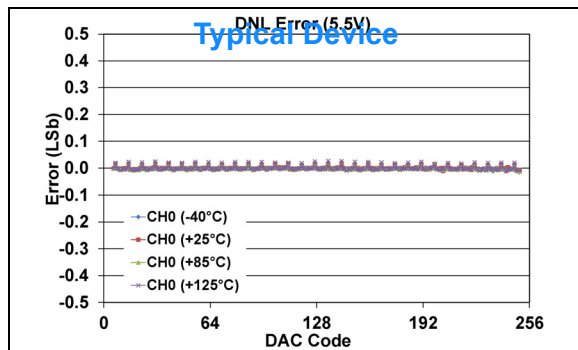


FIGURE 1-512: DNL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

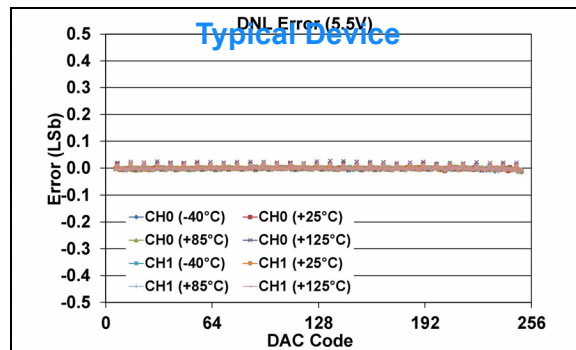


FIGURE 1-515: DNL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

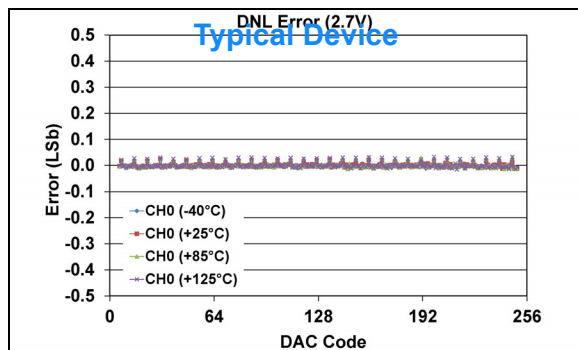


FIGURE 1-513: DNL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

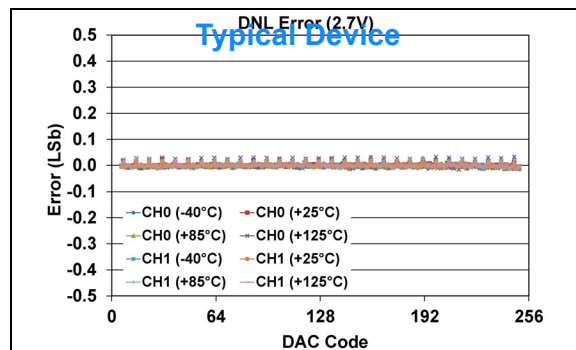


FIGURE 1-516: DNL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

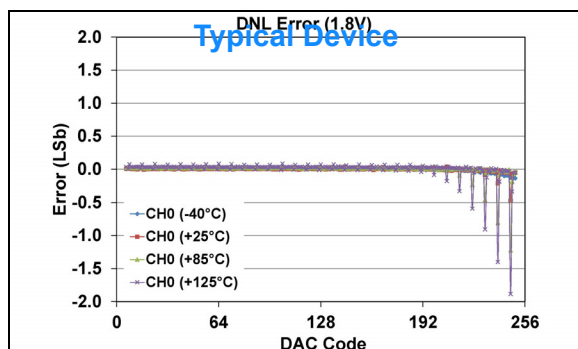


FIGURE 1-514: DNL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x))
(see [Appendix B.4](#) for additional information).

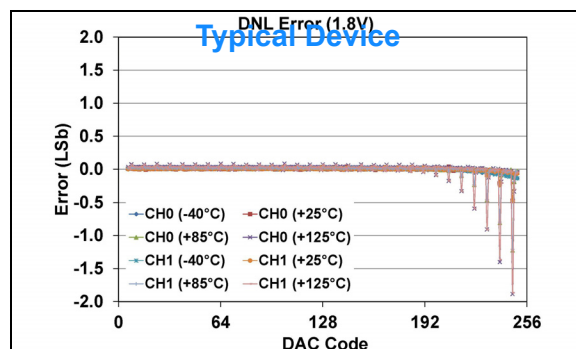


FIGURE 1-517: DNL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = V_{DD}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x))
(see [Appendix B.4](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 1\text{V}$, $Gx = '0'$ (1x)

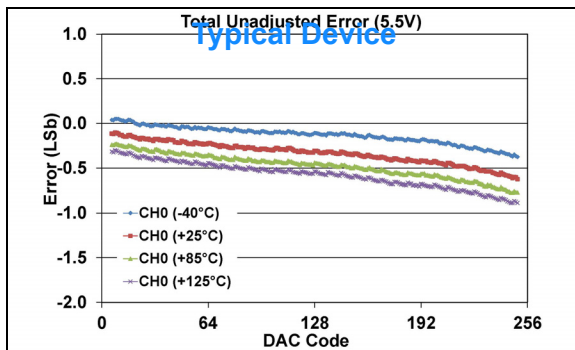


FIGURE 1-518: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB01)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

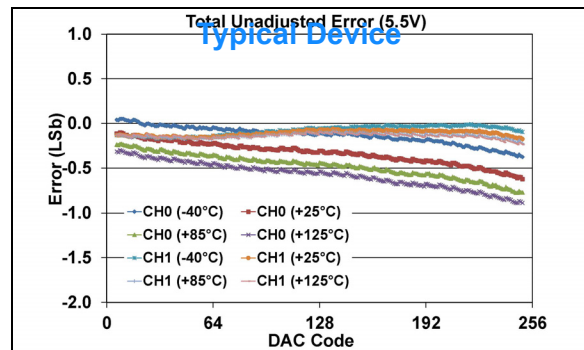


FIGURE 1-521: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB02)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

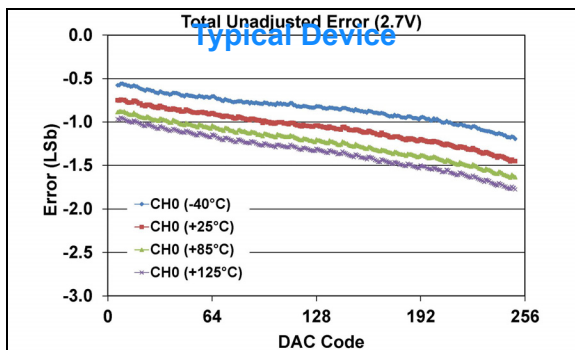


FIGURE 1-519: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB01)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

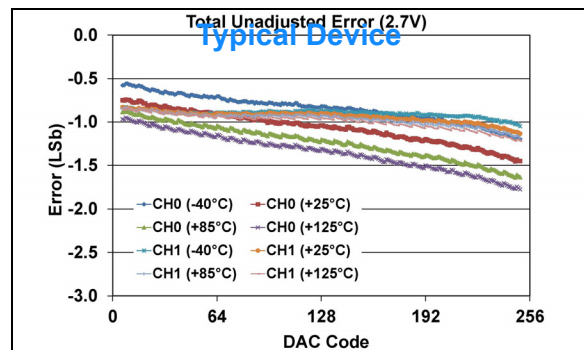


FIGURE 1-522: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB02)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

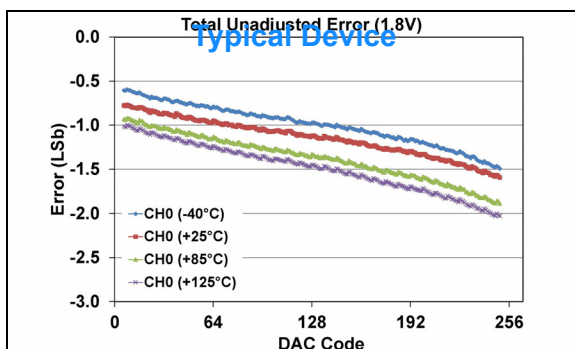


FIGURE 1-520: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - MCP47FXB01)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

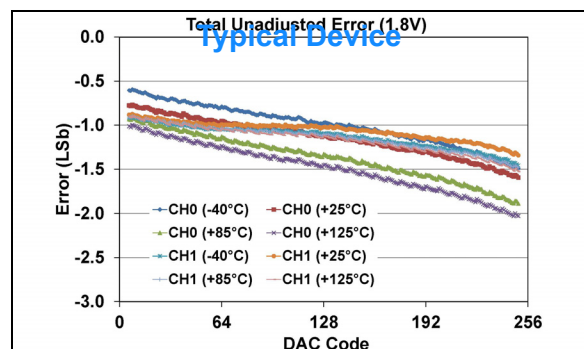


FIGURE 1-523: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - MCP47FXB02)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 1\text{V}$, $Gx = '0'$ (1x)

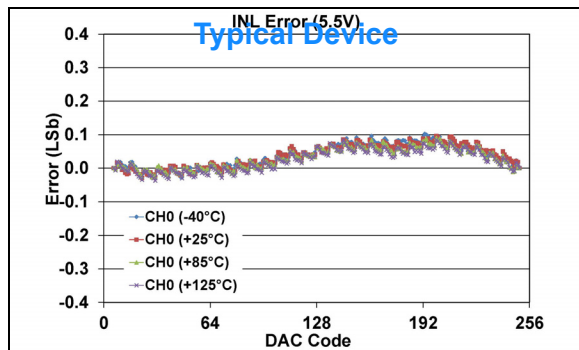


FIGURE 1-524: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

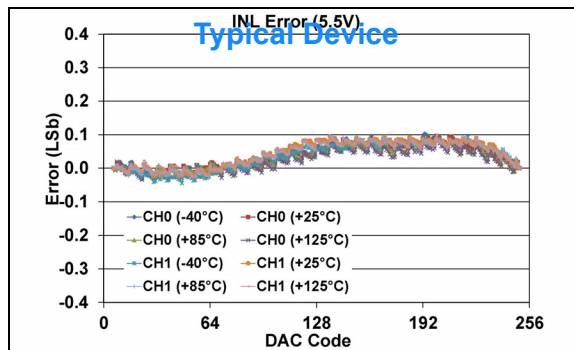


FIGURE 1-527: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

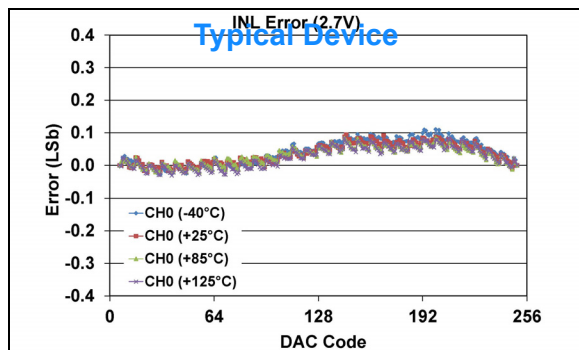


FIGURE 1-525: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

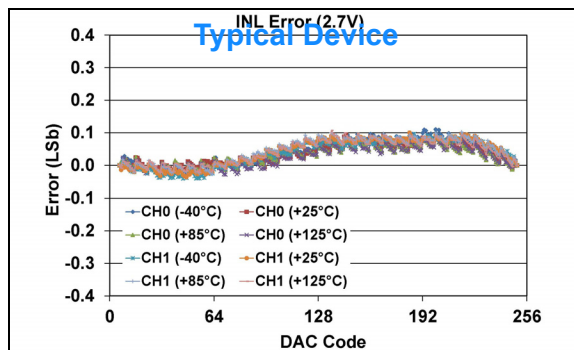


FIGURE 1-528: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

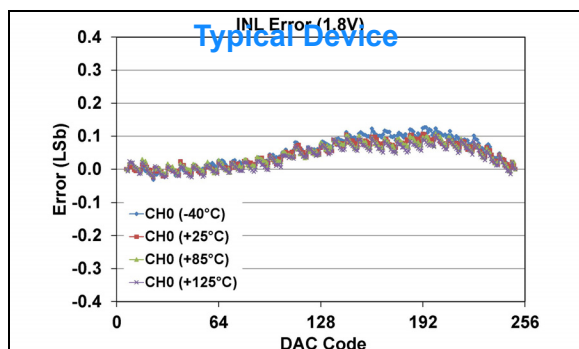


FIGURE 1-526: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

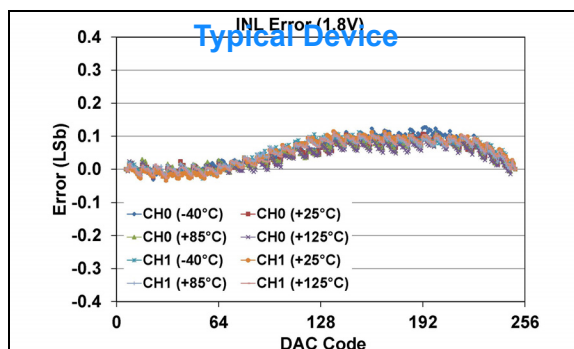


FIGURE 1-529: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 1\text{V}$, $Gx = '0'$ (1x)

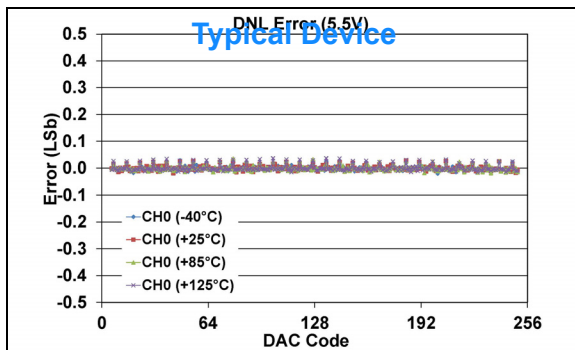


FIGURE 1-530: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

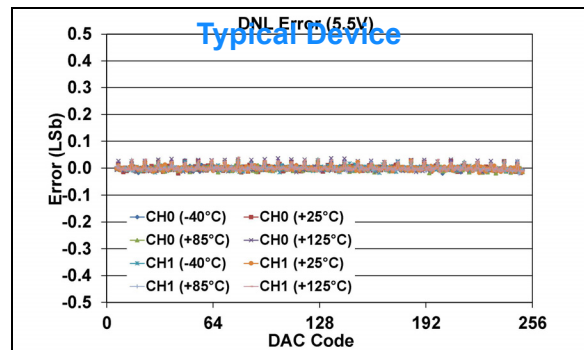


FIGURE 1-533: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

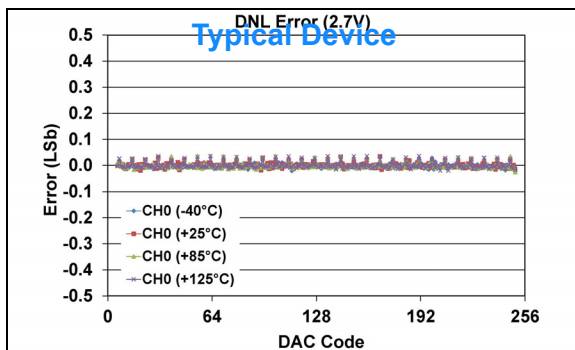


FIGURE 1-531: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

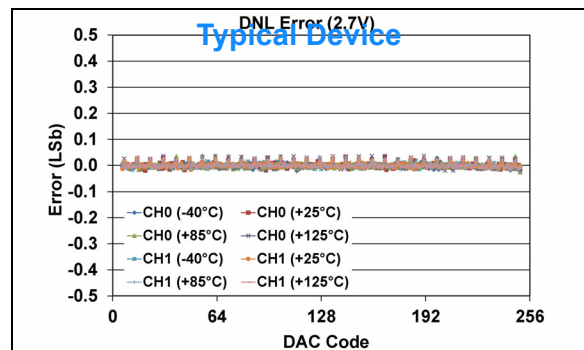


FIGURE 1-534: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

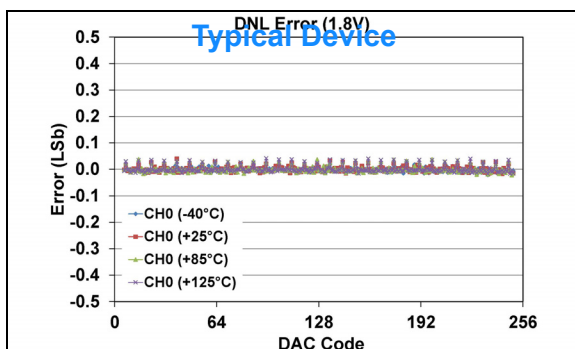


FIGURE 1-532: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

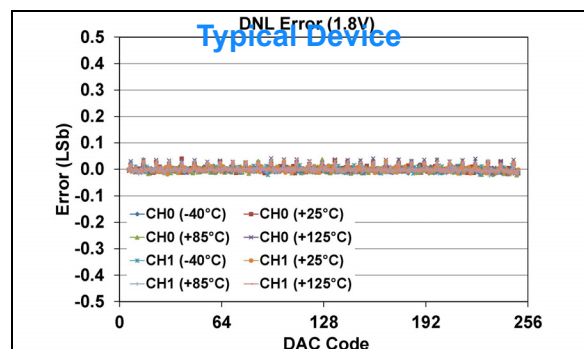


FIGURE 1-535: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 1\text{V}$, $Gx = '1'$ (2x)

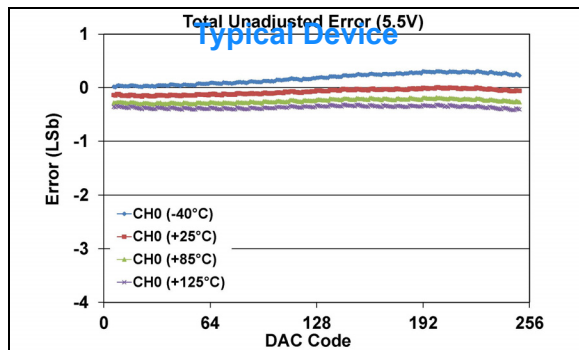


FIGURE 1-536: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

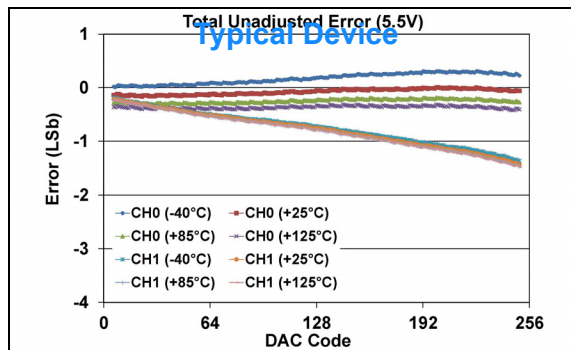


FIGURE 1-539: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

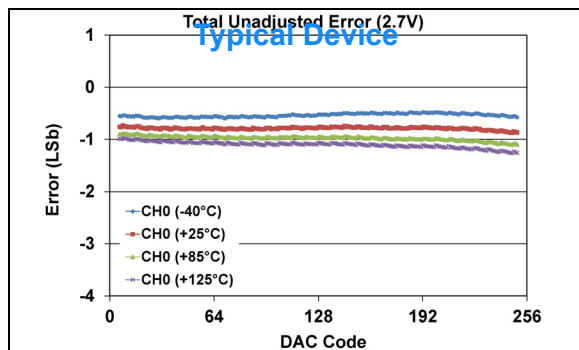


FIGURE 1-537: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

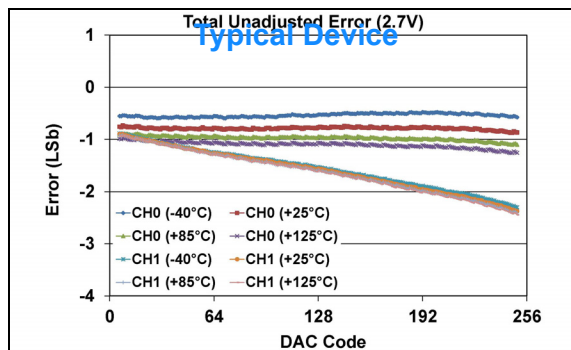


FIGURE 1-540: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

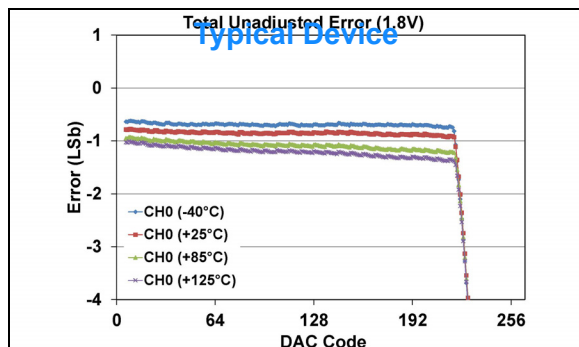


FIGURE 1-538: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x))
(see [Appendix B.5](#) for additional information).

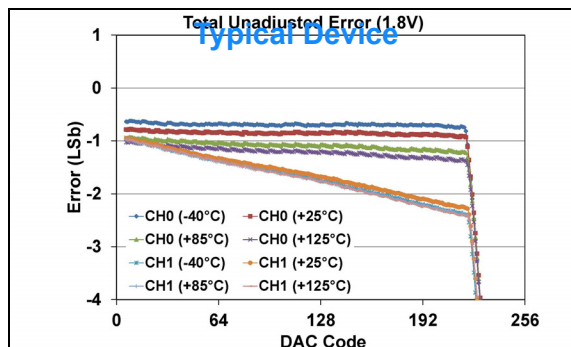


FIGURE 1-541: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x))
(see [Appendix B.5](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 1\text{V}$, $Gx = '1'$ (2x)

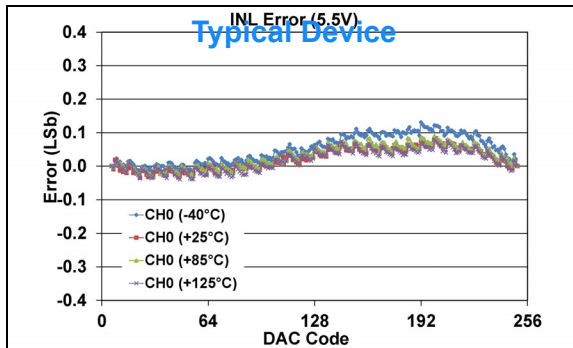


FIGURE 1-542: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

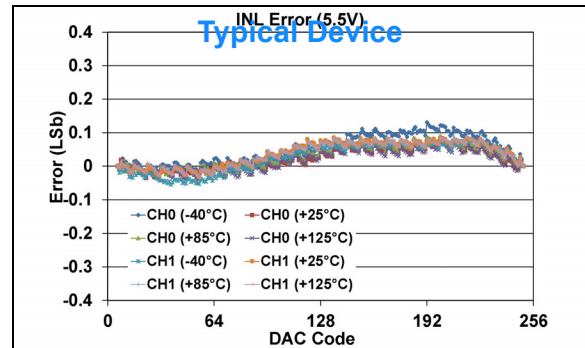


FIGURE 1-545: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

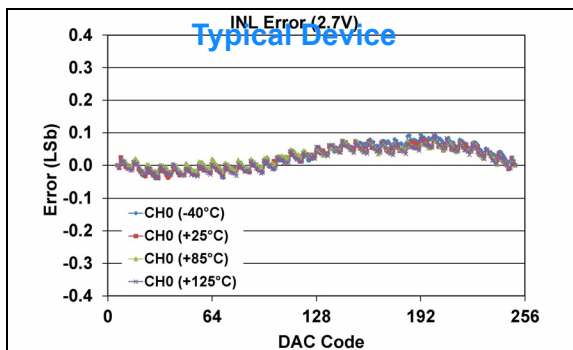


FIGURE 1-543: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

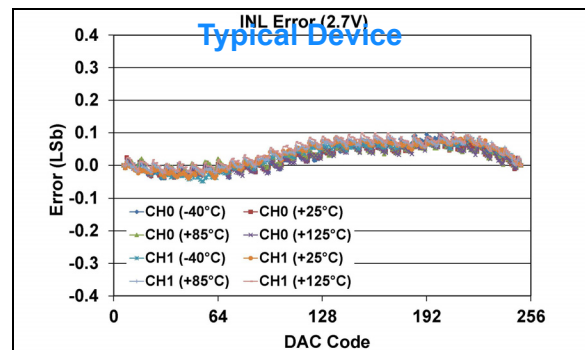


FIGURE 1-546: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

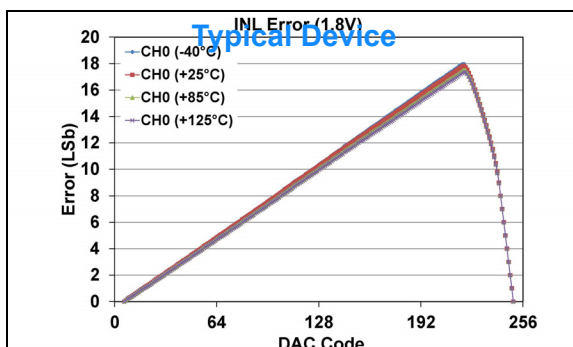


FIGURE 1-544: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x))
(see [Appendix B.5](#) for additional information).

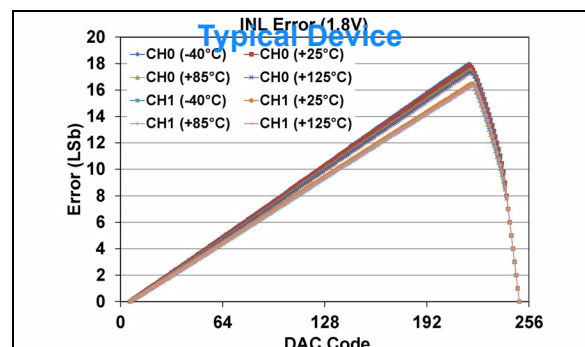


FIGURE 1-547: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x))
(see [Appendix B.5](#) for additional information).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 1\text{V}$, $Gx = '1'$ (2x)

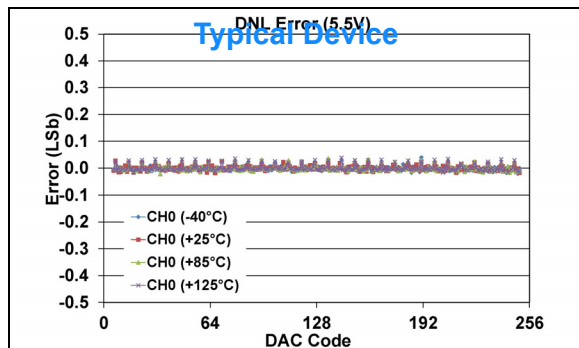


FIGURE 1-548: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

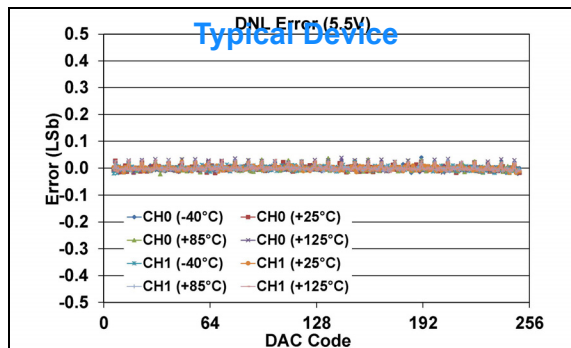


FIGURE 1-551: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

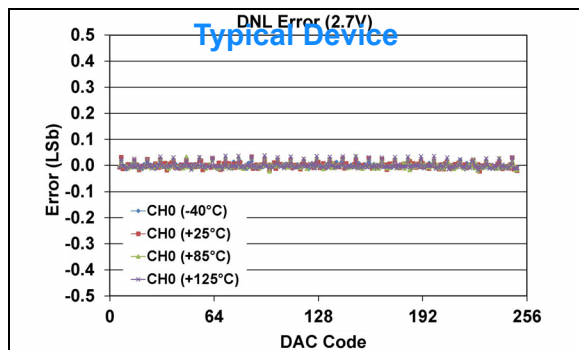


FIGURE 1-549: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

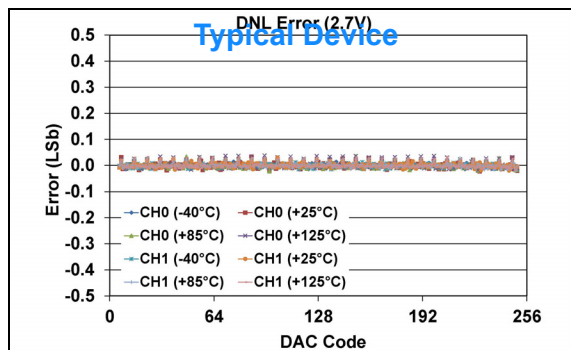


FIGURE 1-552: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

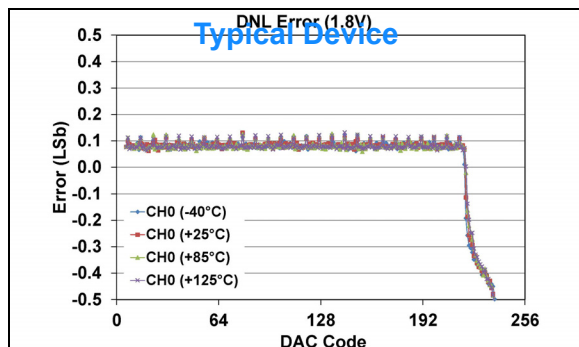


FIGURE 1-550: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x))
(see [Appendix B.5](#) for additional information).

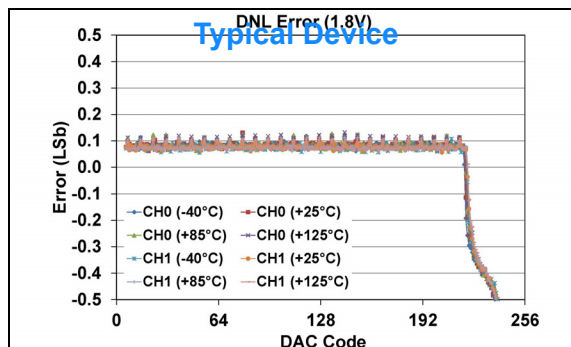


FIGURE 1-553: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 1.8\text{V}$, $V_{REF} = 1\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x))
(see [Appendix B.5](#) for additional information).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 2.048\text{V}$

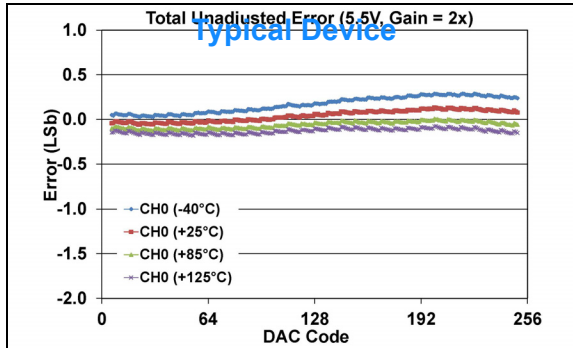


FIGURE 1-554: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

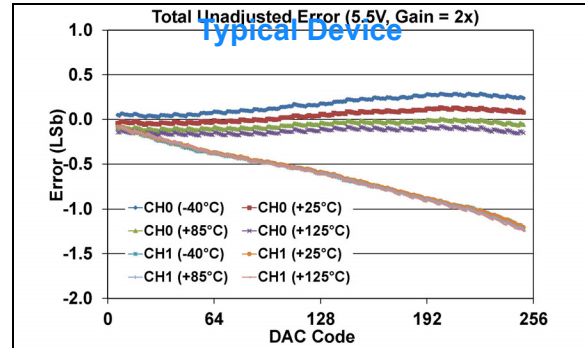


FIGURE 1-557: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

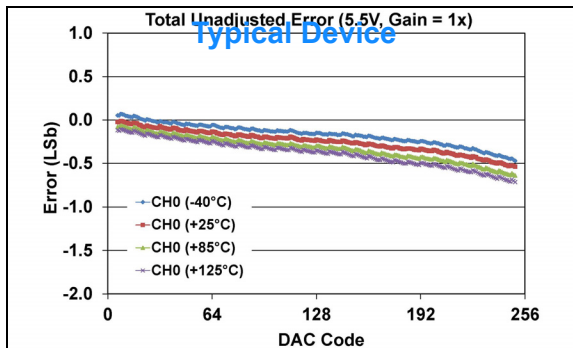


FIGURE 1-555: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

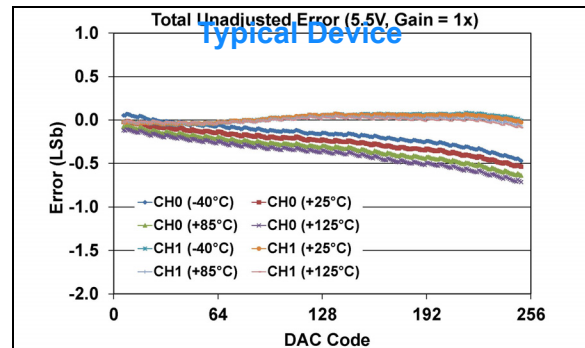


FIGURE 1-558: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

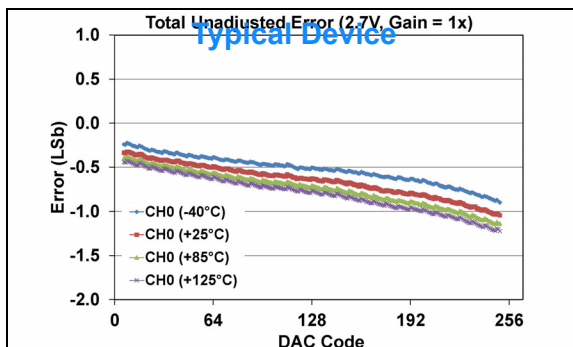


FIGURE 1-556: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

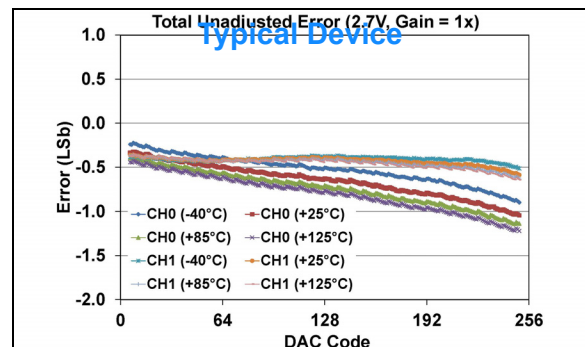


FIGURE 1-559: Total Unadjusted Error (V_{OUT}) vs. DAC Code, and Temperature (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

MCP47FXBXX

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 2.048\text{V}$

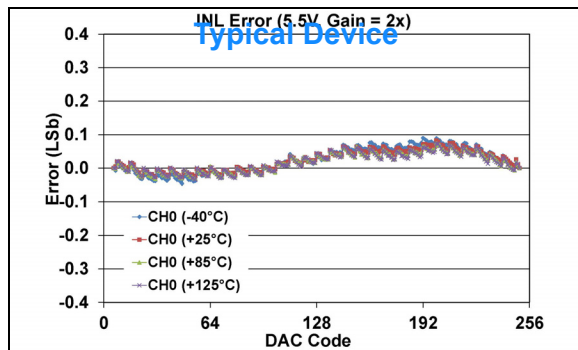


FIGURE 1-560: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $G_x = '1'$ (2x)).

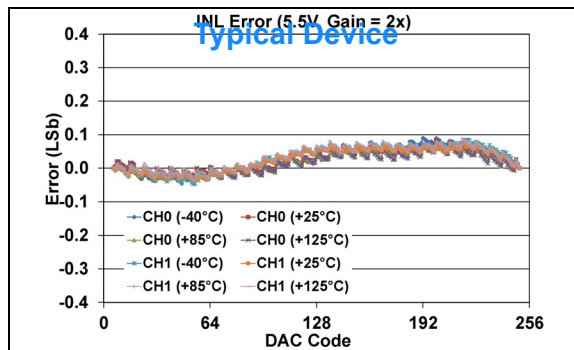


FIGURE 1-563: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $G_x = '1'$ (2x)).

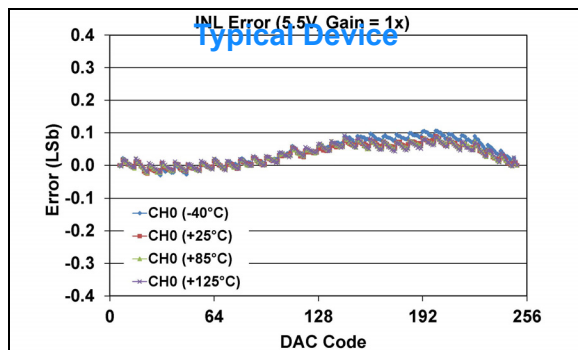


FIGURE 1-561: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $G_x = '0'$ (1x)).

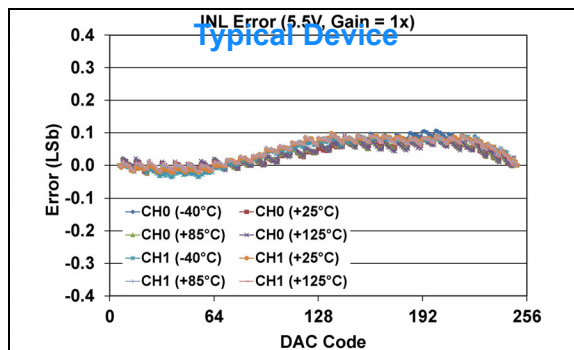


FIGURE 1-564: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $G_x = '0'$ (1x)).

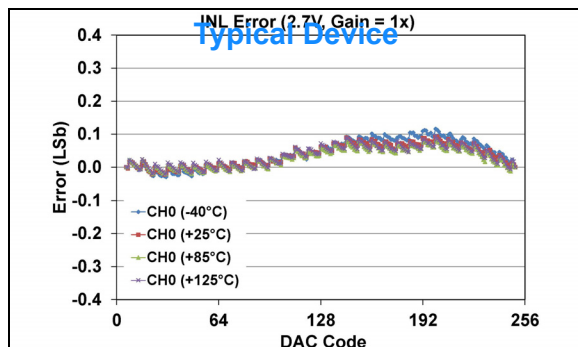


FIGURE 1-562: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $G_x = '0'$ (1x)).

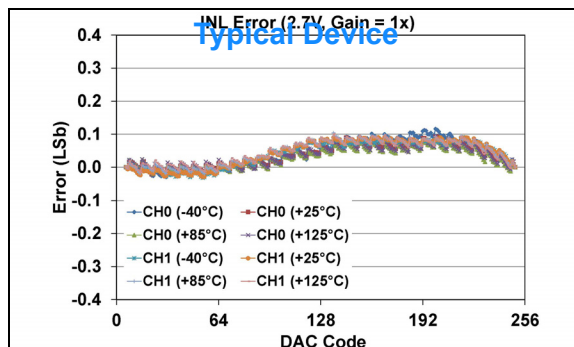


FIGURE 1-565: INL Error vs. DAC Code, and Temperature (Code 6 - 250) (Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $G_x = '0'$ (1x)).

Note: Unless otherwise indicated, $T_A = +25^\circ\text{C}$, $V_{DD} = 5.5\text{V}$.

8-bit: $VRxB:VRxA = '11'$ (V_{REF} Buffered Mode), $V_{REF} = 2.048\text{V}$

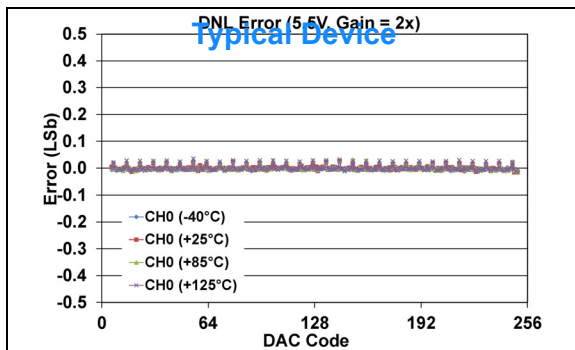


FIGURE 1-566: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

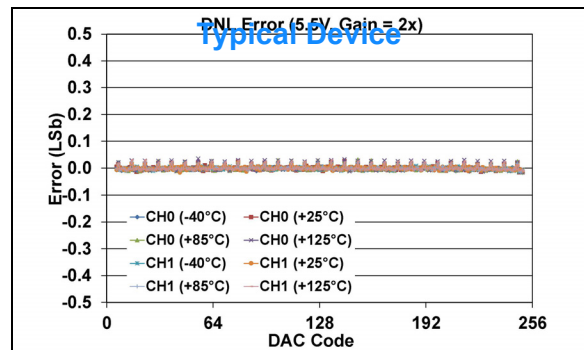


FIGURE 1-569: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '1'$ (2x)).

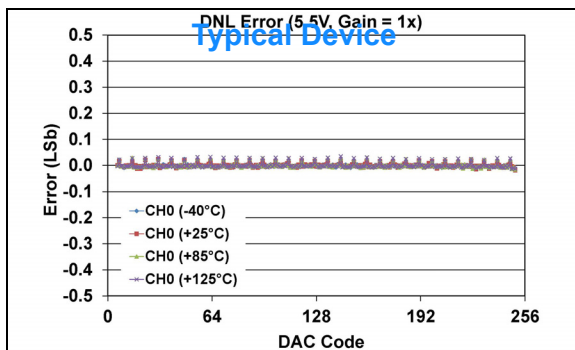


FIGURE 1-567: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

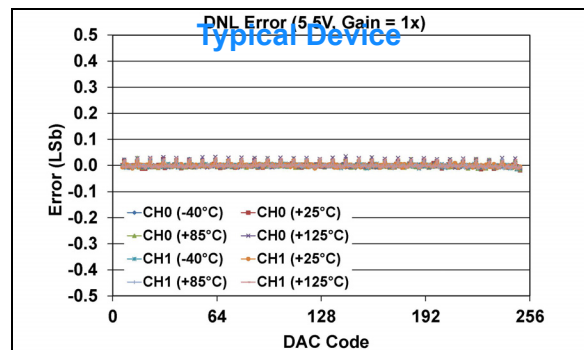


FIGURE 1-570: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 5.5\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

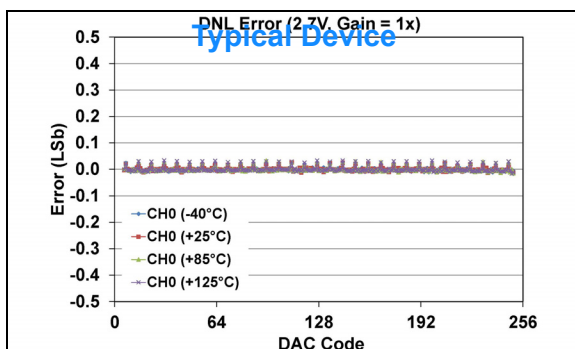


FIGURE 1-568: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Single Channel - **MCP47FXB01**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

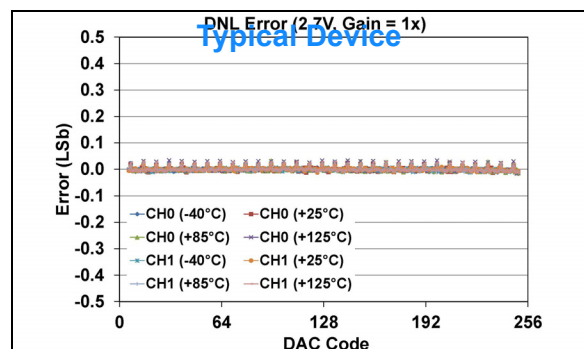


FIGURE 1-571: DNL Error vs. DAC Code, and Temperature (Code 6 - 250)
(Dual Channel - **MCP47FXB02**)
(**8-bit:** $V_{DD} = 2.7\text{V}$, $V_{REF} = 2.048\text{V}$, $VRxB:VRxA = '11'$ (V_{REF} Buffered), $Gx = '0'$ (1x)).

MCP47FXBXX

NOTES:

APPENDIX A: REVISION HISTORY

Revision A (February 2015)

- Original Release of this Document.

APPENDIX B: CHARACTERIZATION GRAPH PERFORMANCE INSIGHTS

This Appendix discusses some of the device's operational performance reflected in the supplied device performance graphs.

The device's performance is calibrated in a single configuration. This factory calibration is in the V_{DD} mode ($VRxB:VRxA = '00'$) at 5V.

An example of this is the observed device performance differences between, V_{DD} mode, V_{REF} Unbuffered mode with $V_{REF} = V_{DD}$, and V_{REF} Buffered mode with $V_{REF} = V_{DD}$. In an ideal implementation, the performance would be identical. Due to device circuit implementation differences, there are performance differences that occur. Looking at the Total Unadjusted Error graphs for each mode gives an indication of where the output buffer is no longer operating in a linear fashion. If this occurs before code 4000, the INL and DNL graphs will reflect this nonlinearity. INL data would be good if calculations were based on an upper code value that is in the linear range.

Note:	If output nonlinearity occurs before DAC code 4000, which is indicated by the Total Unadjusted Error curve changing from a straight line, the INL and DNL graphs will reflect this in their graphs as well.
--------------	---

B.1 V_{DD} Mode at $V_{DD} = 1.8V$

At low device voltages (such as 1.8V), the output buffer's performance is degraded. That is, for high DAC register codes, the output voltage is no longer linear. This is shown in the Total Unadjusted Error graph.

Since INL is determined by the measured voltages at code 100 and code 4000, with code 4000 having significant error, the INL graph also reflects that error. If the INL for this data set is calculated with a high code still in the linear region, INL would look similar to the graph at 2.7V.

The device's DNL is also affected once the output buffer is no longer in its linear range.

B.2 V_{REF} Unbuffered Mode with $V_{REF} = V_{DD}$ and a Gain of 1x at $V_{DD} = 1.8V$

At low device voltages (such as 1.8V), the output buffer's performance is degraded. That is, for high DAC register codes, the output voltage is no longer linear. This is shown in the Total Unadjusted Error graph.

Since INL is determined by the measured voltages at code 100 and code 4000, with code 4000 having significant error, the INL graph also reflects that error. If the INL for this data set is calculated with a high code still in the linear region, INL would look similar to the graph at 2.7V.

The device's DNL is also affected once the output buffer is no longer in its linear range.

B.3 V_{REF} Unbuffered Mode with $V_{REF} = 1V$ and a Gain of 2x at $V_{DD} = 1.8V$

With a V_{REF} of 1V and a Gain of 2x, theoretically, the output would go to 2V. But since V_{DD} is at 1.8V, the output is "clipped". This clipping impacts the graphs for Total Unadjusted Error, INL and DNL. If the INL for this data set is calculated with an upper point that was in the linear region (lower than code 4000), the INL graph would look similar to the 1.8V graph where Gain was set to 1x (in the calculated code range).

B.4 V_{REF} Buffered Mode with $V_{REF} = V_{DD}$ and a Gain of 1x at $V_{DD} = 1.8V$

Due to the V_{REF} input voltage being equal to the device V_{DD} voltage, the V_{REF} input buffer is saturated and the voltage on the resistor ladder is lower than either the V_{DD} mode or the V_{REF} Unbuffered mode.

At low device voltages (such as 1.8V), the output buffer's performance is degraded. That is, for high DAC register codes, the output voltage is no longer linear. This is shown in the Total Unadjusted Error graph.

Due to this decline in the voltage on the resistor ladder, the following occurs:

- Total Unadjusted Error is worse than V_{DD} mode
- The output buffer saturates at a higher code than V_{DD} mode

Since INL is determined by the measured voltages at code 100 and code 4000, with code 4000 having significant error, the INL graph also reflects that error. If the INL for this data set is calculated with a high code still in the linear region, INL would look similar to the graph at 2.7V.

The device's DNL is also affected once the output buffer is no longer in its linear range.

If the widest DAC code range for better INL performance is required, then evaluate this device configuration, but in most cases the V_{DD} mode ($VRxB:VRxA = '00'$) is the suggested device configuration.

B.5 V_{REF} Buffered Mode with $V_{REF} = 1V$ and a Gain of 2x at $V_{DD} = 1.8V$

With a V_{REF} of 1V and a Gain of 2x, theoretically, the output would go to 2V. But since V_{DD} is at 1.8V, the output is "clipped". This clipping impacts the graphs for Total Unadjusted Error, INL and DNL. If the INL for this data set is calculated with an upper point that was in the linear region (lower than code 4000), the INL graph would look similar to the 1.8V graph where Gain was set to 1x (in the calculated code range).

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights.

Trademarks

The Microchip name and logo, the Microchip logo, dsPIC, FlashFlex, flexPWR, JukeBlox, KEELQ, KEELQ logo, Klear, LANCheck, MediaLB, MOST, MOST logo, MPLAB, OptoLyzer, PIC, PICSTART, PIC³² logo, RightTouch, SpyNIC, SST, SST Logo, SuperFlash and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

The Embedded Control Solutions Company and mTouch are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, BodyCom, chipKIT, chipKIT logo, CodeGuard, dsPICDEM, dsPICDEM.net, ECAN, In-Circuit Serial Programming, ICSP, Inter-Chip Connectivity, KlearNet, KlearNet logo, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, RightTouch logo, REAL ICE, SQI, Serial Quad I/O, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

GestIC is a registered trademarks of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2015, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

ISBN: 978-1-63277-088-2

QUALITY MANAGEMENT SYSTEM
CERTIFIED BY DNV
= ISO/TS 16949 =

Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.

Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
<http://www.microchip.com/support>
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Austin, TX
Tel: 512-257-3370

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Cleveland
Independence, OH
Tel: 216-447-0464
Fax: 216-447-0643

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Novi, MI
Tel: 248-848-4000

Houston, TX
Tel: 281-894-5983
Indianapolis

Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608

New York, NY
Tel: 631-435-6000

San Jose, CA
Tel: 408-735-9110

Canada - Toronto
Tel: 905-673-0699
Fax: 905-673-6509

ASIA/PACIFIC

Asia Pacific Office
Suites 3707-14, 37th Floor
Tower 6, The Gateway
Harbour City, Kowloon

Hong Kong
Tel: 852-2943-5100
Fax: 852-2401-3431

Australia - Sydney
Tel: 61-2-9868-6733
Fax: 61-2-9868-6755

China - Beijing
Tel: 86-10-8569-7000
Fax: 86-10-8528-2104

China - Chengdu
Tel: 86-28-8665-5511
Fax: 86-28-8665-7889

China - Chongqing
Tel: 86-23-8980-9588
Fax: 86-23-8980-9500

China - Dongguan
Tel: 86-769-8702-9880

China - Hangzhou
Tel: 86-571-8792-8115
Fax: 86-571-8792-8116

China - Hong Kong SAR
Tel: 852-2943-5100
Fax: 852-2401-3431

China - Nanjing
Tel: 86-25-8473-2460
Fax: 86-25-8473-2470

China - Qingdao
Tel: 86-532-8502-7355
Fax: 86-532-8502-7205

China - Shanghai
Tel: 86-21-5407-5533
Fax: 86-21-5407-5066

China - Shenyang
Tel: 86-24-2334-2829
Fax: 86-24-2334-2393

China - Shenzhen
Tel: 86-755-8864-2200
Fax: 86-755-8203-1760

China - Wuhan
Tel: 86-27-5980-5300
Fax: 86-27-5980-5118

China - Xian
Tel: 86-29-8833-7252
Fax: 86-29-8833-7256

ASIA/PACIFIC

China - Xiamen
Tel: 86-592-2388138
Fax: 86-592-2388130

China - Zhuhai
Tel: 86-756-3210040
Fax: 86-756-3210049

India - Bangalore
Tel: 91-80-3090-4444
Fax: 91-80-3090-4123

India - New Delhi
Tel: 91-11-4160-8631
Fax: 91-11-4160-8632

India - Pune
Tel: 91-20-3019-1500

Japan - Osaka
Tel: 81-6-6152-7160
Fax: 81-6-6152-9310

Japan - Tokyo
Tel: 81-3-6880-3770
Fax: 81-3-6880-3771

Korea - Daegu
Tel: 82-53-744-4301
Fax: 82-53-744-4302

Korea - Seoul
Tel: 82-2-554-7200
Fax: 82-2-558-5932 or
82-2-558-5934

Malaysia - Kuala Lumpur
Tel: 60-3-6201-9857
Fax: 60-3-6201-9859

Malaysia - Penang
Tel: 60-4-227-8870
Fax: 60-4-227-4068

Philippines - Manila
Tel: 63-2-634-9065
Fax: 63-2-634-9069

Singapore
Tel: 65-6334-8870
Fax: 65-6334-8850

Taiwan - Hsin Chu
Tel: 886-3-5778-366
Fax: 886-3-5770-955

Taiwan - Kaohsiung
Tel: 886-7-213-7828

Taiwan - Taipei
Tel: 886-2-2508-8600
Fax: 886-2-2508-0102

Thailand - Bangkok
Tel: 66-2-694-1351
Fax: 66-2-694-1350

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4450-2828
Fax: 45-4485-2829

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany - Dusseldorf
Tel: 49-2129-3766400

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Germany - Pforzheim
Tel: 49-7231-424750

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Italy - Venice
Tel: 39-049-7625286

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Poland - Warsaw
Tel: 48-22-3325737

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

Sweden - Stockholm
Tel: 46-8-5090-4654

UK - Wokingham
Tel: 44-118-921-5800
Fax: 44-118-921-5820

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microchip:](#)

[MCP47FEB04-20E/ST](#) [MCP47FEB24-20E/ST](#) [MCP47FEB04-E/MQ](#) [MCP47FEB04T-E/MQ](#) [MCP47FEB24-E/MQ](#)
[MCP47FEB24T-E/MQ](#) [MCP47FEB04T-20E/ST](#) [MCP47FEB24T-20E/ST](#)